PIC8
ROCK TOOLS

DTH DRILLING
RC DRILLING
OVERBURDEN DRILLING

Percussive Products





About Us

Pic8 rock tools mainly provides advanced rock-drilling tools for mining, construction and related industries. Since its foundation Pic8 rock tools has been engaged to provide customers first class products with fast, stable and economical solutions for rock drilling, in order to help them in increasing their productivity and profitability.

Pic8 rock tools, with constant efforts in the years, gives great attention to quality improvement of products and drives development of rock drilling technology; Pic8 rock tools has established strategic partnership with a number of qualified manufacturers that, using our specifications and the most modern production technologies, are able to ensure a high level of quality.

Pic8 rock tools can offer to customers the most suitable solution based upon the full understanding of their specific requirements, and a wide range of actual performance tests of our products under the rigorous control on production quality and supplying system.

Pic8 rock tools gains high reputation from customers worldwide by implementing a customer-oriented business philosophy. Pic8's people always pursue the principle that everything we do it must conform to objective facts and to be honest and professional when facing problems.
Pic8 rock tools will give its commitment to the customers, employees as well as society





SAFETY- LIVE WITH IT

We believe that by embedding Safety as our foundation, and then building a business around it, we've developed a culture that creates ownership of positive behaviours to keep ourselves and our workmates safe.

It's bottom up. Top Down. Its throughout our business model

We've measured Positive Safety Indicators since inception

QAQC

Technology

Identical process technologies to European competitors.

Equipment

Advanced CNC lathes and European heat treatment facilities used onsite.

Raw material

Only recognised premium quality raw materials used during manufacturing process.

Testing Lab

Onsite test lab facilities followed up by third party testing

Quality System


ISO 9001 Quality management system since 2006.

Staff

Low staff turnover, onsite training. Highly competent tradesmen delivering premium quality tools.

GLOBAL PRESENCE

→Fast growing client base globally.
→Global presence all over the world
→Strategic relationships with recognised industry leaders.

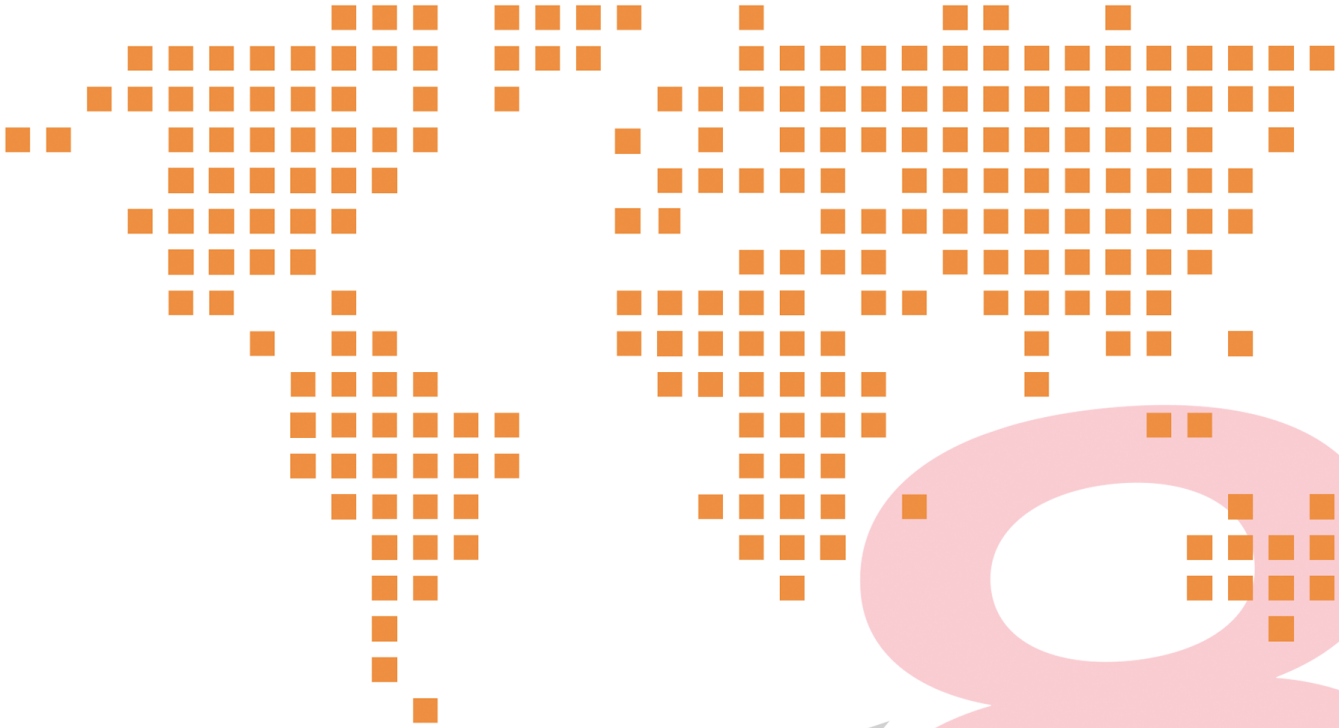

PRODUCTS

→ Our materials are fully tested to ensure they outperform the competition and that only the best available steel is used.

→ A complete range of tools for all drilling scenarios.
→ We deliver on special projects and customised scenarios when required.
→ We guarantee to out price our competitors.

Only the best available steel is used.




TEST RESULTS

Premium Quality, Performance, Savings.



Figures are based on cumulative test results over the last 5 year period.

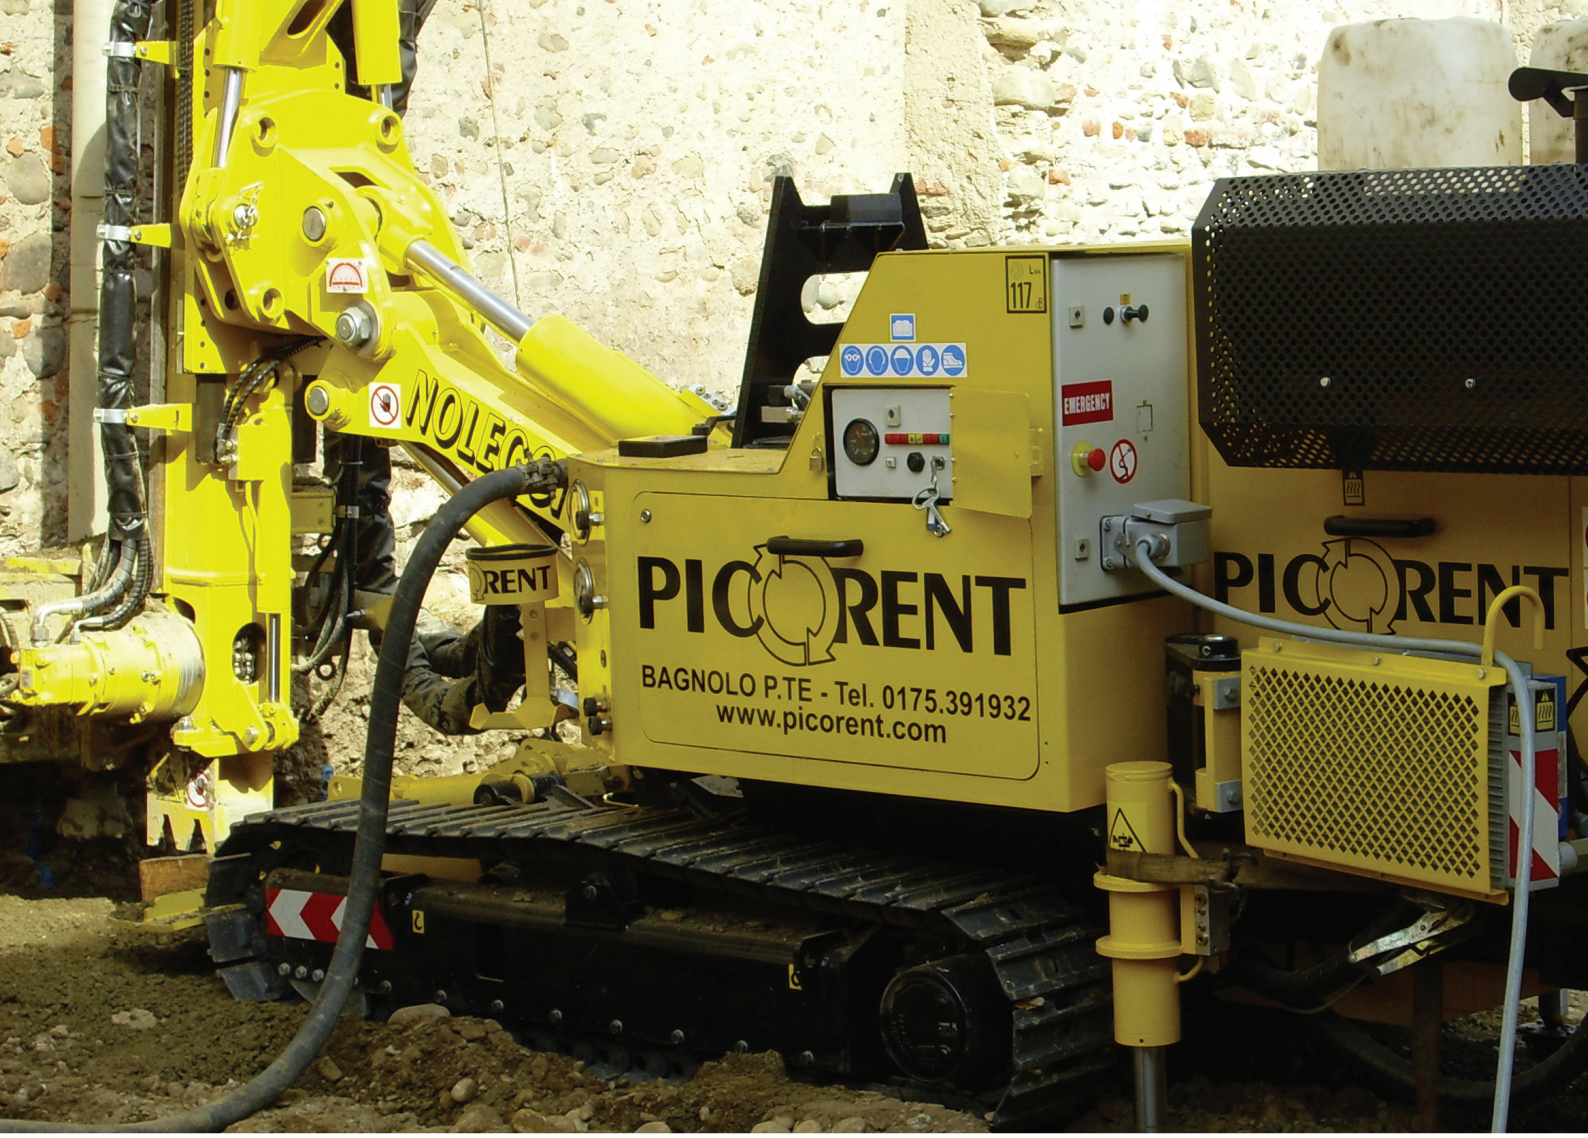

PIC8 ROCK TOOLS

Contents

06 DTH hammers and drill bits

62 RC hammers and drill bits

76 Overburden drilling systems

84 Drill pipes

89 Adapters

PIC8 ROCK TOOLS

DTH hammers and drill bits



DTH hammer Operation and Maintenance Guidelines

GENERAL INTRODUCTION

The high air pressure Down The Hole (DTH) hammer is designed as DTH rock drilling tool. It differs from other rock drilling tools in the way that this kind of hammer always stays in the bottom of the hole during the operation while the piston punches down directly against the drill bit. Compressed air is led to the DTH hammer though the drill pipe. Exhaust air is discharged through hole in drill bit and used to flush out the cuttings to clean the drill hole. Rotation is delivered from a rotation unit and feed force from the feed is transferred to the DTH hammer via the drill pipe.

TECHNICAL DESCRIPTION

The DTH hammer comprises a narrow, elongated external cylinder which contains a piston, an internal cylinder, an air distributor and a check valve. The top sub with a spanner slot and coupling thread is fitted to the top side of the external cylinder. The bottom part, the driver sub, also with thread, encloses the drill bit and transfers feed force as well as rotation to the drill bit. A stop ring limits axial movements of the drill bit. The purpose of the check valve is to prevent impurities from getting into the DTH hammer when operation pressure is shut off. During drilling, the drill bit is pushed into the DTH hammer and pressed against the drive sub. The piston strikes directly against the impact surface of the bit. When the bit loses contact with the bottom of the hole, air is blown down strongly.

OPERATION AND MAINTENANCE

- Always disassemble, inspect, repair and clean the DTH hammer routinely. The frequency of periodic maintenance depends upon the drilling conditions and hammer use.
- The drive sub and top sub are threaded into the cylinder with right-hand threads. The hammer must be always operated with right-hand rotation.
- While starting drilling, use the impact and feed force, let the bit work its way slightly into the rock.
- It is important that the feed force is in accordance with the weight of the drill strings. The force from the feed motor needs to be adjusted during drilling, depending on the variable weight of the drill string.
- The normal rotation speed of DTH hammer lies between 15-25 rpm. Faster rotation means faster drilling. However, in highly abrasive rock, rotation speed should be reduced to avoid excessive wear of the drill bit.
- Clogged or cave-in of the hole, can lead to drill stuck. It is important to regularly clean the hole intervals by carrying out strong air-blowing with the DTH hammer.
- Jointing operation is the work sequence where a DTH hammer is most likely to experience contamination of cuttings and various kinds of impurities. Cover the thread en of the drill pipe and make sure that it is free from cuttings and dirt.
- It is important to keep the DTH hammer lubricated properly. Inadequate lubrication accelerates wear and can lead to the DTH hammer breakdown.
- Always check condition of the impact surface of the piston visually when changing the bit. Replace the piston if necessary.
- Inspect and service a new hammer after 6 hours of operation.
- Service interval is 72 hours, if the hammer is used in hard, abrasive drilling.
- If the hammer is used with water/foam injection in wet holes where mud is encountered, clean the hammer as soon as possible after each use with compressed air blasts and coat with rock drill oil. Inspect and service every 72 hours.

TROUBLE SHOOTING

- **The DTH hammer does not start**

Probable cause	*Recommended action*
→ Hammer components are broken.	→ Disassemble and check for broken components.
→ Hammer is clogged.	→ Disassemble and clean.
→ Hammer is filled with thick oil.	→ Run air through hammer.
Blockage before hammer.	→ Check all hoses on rig for kinks or other blockages.

- **Rough or erratic operation**

Probable cause	*Recommended action*
→ Insufficient or too much weight on bit	→ Adjust weight until hammer smoothes out. This is usually accompanied with rpm adjustment.
→ Too slow or too fast RPM.	→ Adjust rpm until hammer smoothes out. This is usually accompanied with weight on bit adjustment.
→ Dull bit.	→ Re-sharpen or replace bit.
→ Worn critical hammer components.	→ Check critical diameters / lengths for specification.
→ Too much water injection.	→ Back off water injection rate.
→ Inadequate or too much oil, too high viscosity.	→ Adjust lubrication rate and proper viscosity oil.

Impact mechanism does not operate, or works with reduced efficiency

Probable cause	*Recommended action*
→ Air way is throttled or blocked.	→ Check the air pressure and the air way.
→ Too much clearance between the piston and the internal cylinder, or between the piston and the external cylinder, or between the piston and the air distributor.	→ Disassemble the DTH hammer and inspect the wear, replace worn part if necessary.
→ The DTH hammer is dogged by impurities.	→ Disassemble the DTH hammer and clear all internal components.
→ Piston failure or foot valve failure.	→ Disassemble the DTH hammer and replace the fractured piston or sit up a new bit.

Lost drill bit and driver sub

Probable cause	*Recommended action*
→ Inadequate weight on bit.	→ Adjust feed pressure.
→ Improper make up torque.	→ Use tong to torque threads
→ Soft or broken formation.	→ prior to operation. Use lower air pressure.

DTH OVERVIEW

→ The high air pressure DTH hammer is designed as DTH rock drilling tool. It differs from other rock drilling tools in the way that this kind of hammer always stays in the bottom of the hole during the operation while the piston punches down directly against the drill bit. Compressed air is led to the DTH hammer through the drill tube. Exhaust air is discharged through hole in drill bit, thus flushing out the cuttings to clean the drill hole. Rotation is delivered from a rotation unit, and feed force from the feed is transferred to the DTH hammer via the drill tube.

→ The DTH hammer comprises a narrow, elongated external cylinder which contains a piston, an internal cylinder, an air distributor and a check valve. The top sub with a spanner slot and coupling thread is fitted to the top side of the external cylinder. The bottom part, the drive sub (also with thread), connects with the drill bit and transfers feed force as well as rotation to the drill bit. A stop ring limits axial movements of the drill bit. The purpose of the check valve is to prevent impurities from getting into the DTH hammer when operating pressure is shut off. During drilling, the drill bit is pushed into the DTH hammer and pressed against the drive chuck. The piston strikes directly against the impact surface of the bit. When the bit loses contact with the bottom of the hole, air is blown down strongly.

SELECTING THE RIGHT HAMMER

Valved DTH hammer

→ Valveless air distribution, more reliable than before

→ Because of simple structure, piston has long life

→ Highly efficient energy transfer and penetration rate, low air consumption and oil consumption

→ hThe DTH hammer has less breakdowns, fewer parts and good heat treatment, and is and easy to maintain because of the simple structure

→ Easy to be disassembled as top sub, drive chuck and external cylinder are connected by multi-step thread

Explanation of code

Example: DHD4
DHD - DHD bits shank
4 - 4" hammer



Valveless DTH hammer

→ DTH button bits do not need foot valve, and the troubles caused by breakage, thermal expansion and contraction of foot valve can be avoided

→ Low impact energy loss, high impact frequency, drilling speed is faster than valved DTH hammer by 15-30%

→ Simple structure, reliable parts, long life, cheap and easy repair and maintenance

→ Low air consumption and oil consumption. Oil consumption is lower than valved DTH hammer by about 10%

Explanation of code

Example: JSDHD4(W)
DHD - DHD bits shank
4 - 4" hammer
W - Bit without foot valve




DTH hammer - Valveless

DHBR1(W)

Middle-Low air pressure without foot valve

1"

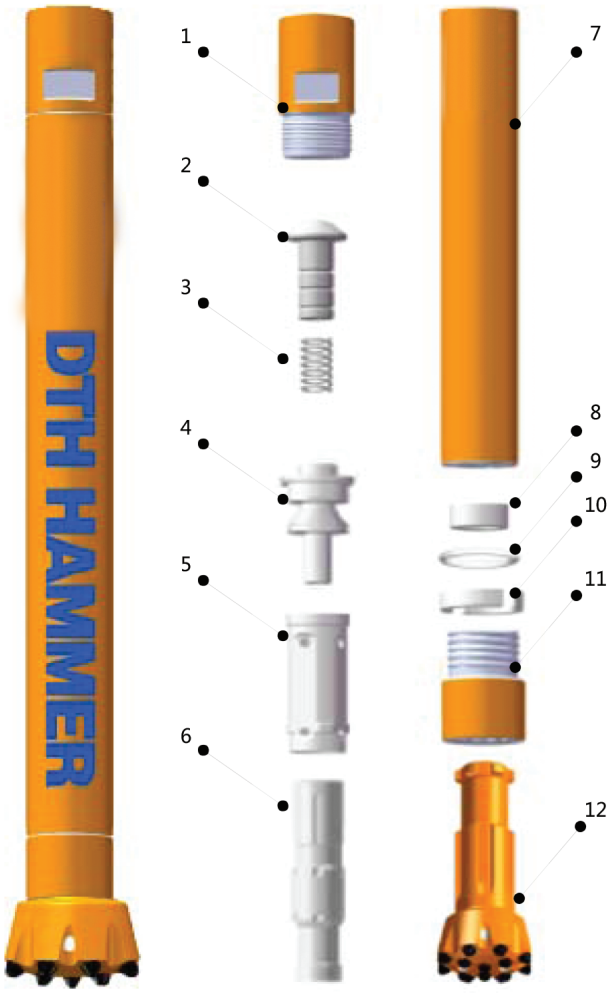

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	1.70	3.75	DHBR1W01
2	Check valve	0.10	0.22	DHBR1W02
3	Spring	0.05	0.11	DHBR1W03
4	Air distributor	0.80	1.76	DHBR1W04
5	Internal cylinder	0.80	1.76	DHBR1W05
6	Piston	1.20	2.65	DHBR1W06
7	External cylinder	4.00	8.82	DHBR1W07
8	Guided sleeve	0.15	0.33	DHBR1W08
9	O-ring of stop ring	0.05	0.11	DHBR1W09
10	Stop ring	0.10	0.22	DHBR1W10
11	Driver sub	0.80	1.76	DHBR1W11
12	Drill bit			DHBR1W12

Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
10.00	22.05	54	2.13	760	29.92	64 - 76	2.52 - 2.99	BR1

Connection thread	Working pressure	Impact rate at 1.4 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
RD 40 BOX	0.7 - 1.5	27	25 - 40	200 - 600

DTH drill bits

1"


Button bits	Part No.	D		Buttons				Flushing	Angle	Weight	Available types
		[mm]	[in]	[No.]	[mm]	[No.]	[mm]	[No.]	[°]	[kg]	
 BR1	DHB57BR1FF	57	2 1/4	6	× 9	2	× 8	2	38	1.6	CC*, CV*
	DHB64BR1FF	64	2 1/2	6	× 10	3	× 10	2	38	1.8	CC*, CV*
	DHB70BR1FF	70	2 3/4	6	× 12	4	× 10	2	38	2.1	CC*, CV*
	DHB76BR1FF	76	3	6	× 12	4	× 10	2	38	2.4	CC*, CV*

*CC: Concave; CV: Convex; FF: Flat face.

DHBR2(W)

Middle-Low air pressure without foot valve

2"

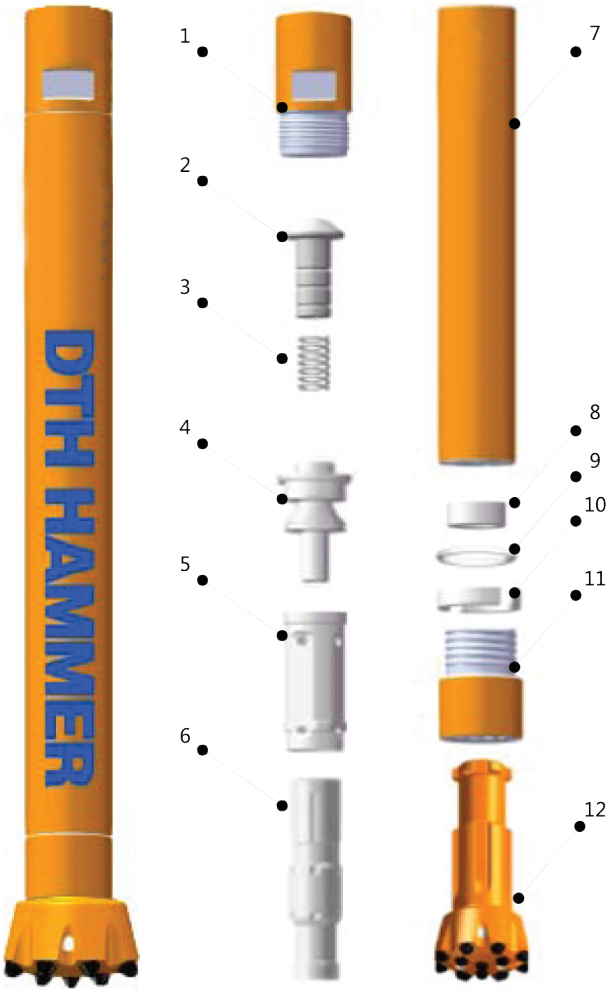

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	2.60	5.73	DHBR2W01
2	Check valve	0.10	0.22	DHBR2W02
3	Spring	0.05	0.11	DHBR2W03
4	Air distributor	0.60	1.32	DHBR2W04
5	Internal cylinder	0.80	1.76	DHBR2W05
6	Piston	3.80	8.38	DHBR2W06
7	External cylinder	4.50	9.92	DHBR2W07
8	Guided sleeve	0.60	1.32	DHBR2W08
9	O-ring of stop ring	0.01	0.01	DHBR2W09
10	Stop ring	0.10	0.22	DHBR2W10
11	Driver sub	1.20	2.65	DHBR2W11
12	Drill bit			DHBR2W12

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
14.50	31.97	62	2.44	880	34.65	70 - 90	2.76 - 3.54	BR2

Connection thread	Working pressure	Impact rate at 1.4 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
RD 50 BOX	0.7 - 1.5	25	25 - 40	200 - 600

DHH25(W)

2"

High air pressure without foot valve

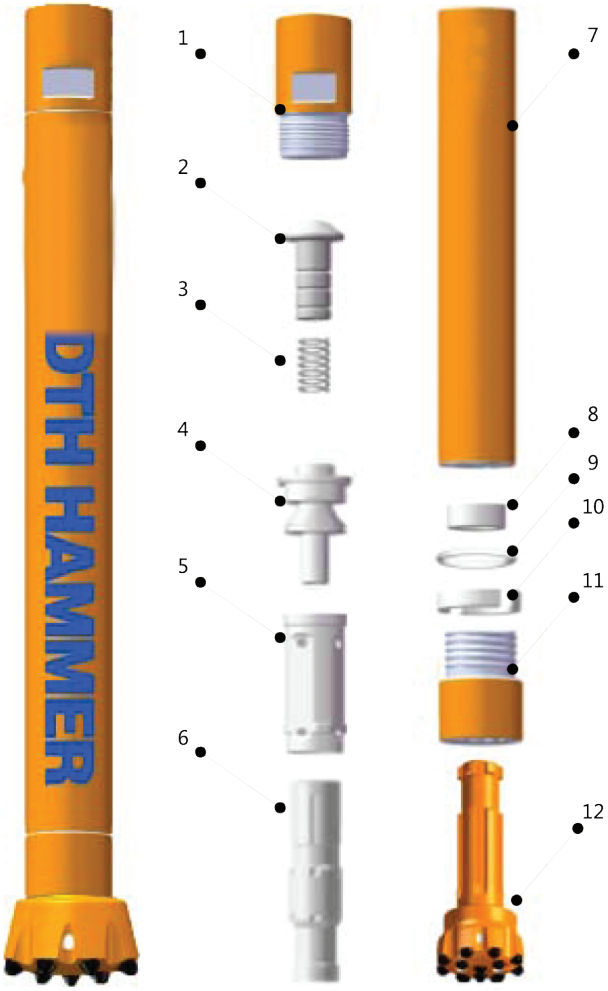

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	3.10	6.83	DHH25W01
2	Check valve	0.10	0.22	DHH25W02
3	Spring	0.05	0.11	DHH25W03
4	Air distributor	0.60	1.32	DHH25W04
5	Internal cylinder	0.80	1.76	DHH25W05
6	Piston	3.80	8.38	DHH25W06
7	External cylinder	4.50	9.92	DHH25W07
8	Guided sleeve	0.60	1.32	DHH25W08
9	O-ring of stop ring	0.01	0.01	DHH25W09
10	Stop ring	0.10	0.22	DHH25W10
11	Driver sub	1.40	3.09	DHH25W11
12	Drill bit			DHH25W12

Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
16.00	35.27	71	2.80	872	34.33	76 - 90	2.99- 3.54	HD25

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
T42×10×1.5	1.0 - 1.5	25	22 - 35	200 - 600

DTH drill bits

2"


Button bits	Part No.	D		Buttons				Flushing	Angle	Weight	Available types
		[mm]	[in]	[No.]	[mm]	[No.]	[mm]	[No.]	[°]	[kg]	
 BR2	DHB76BR2FF	76	3	6	× 13	5	× 10	2	38	3.3	CC*, CV*
	DHB80BR2FF	80	3 1/8	6	× 13	4	× 11	2	38	3.4	CC*, CV*
	DHB82BR2FF	82	3 1/4	6	× 13	4	× 11	2	38	3.5	CC*, CV*
	DHB90BR2FF	90	3 9/16	6	× 13	5	× 12	2	38	3.7	CC*, CV*
 HD25	DHB76DHH25FF	76	3	6	× 13	5	× 10	2	38	3.5	CC*, CV*
	DHB80DHH25FF	80	3 1/8	6	× 13	4	× 11	2	38	3.6	CC*, CV*
	DHB82DHH25FF	82	3 1/4	6	× 13	4	× 11	2	38	3.7	CC*, CV*
	DHB90DHH25FF	90	3 9/16	6	× 13	5	× 12	2	38	3.9	CC*, CV*

*CC: Concave; CV: Convex; FF: Flat face.

DHH35

High air pressure with foot valve

3"

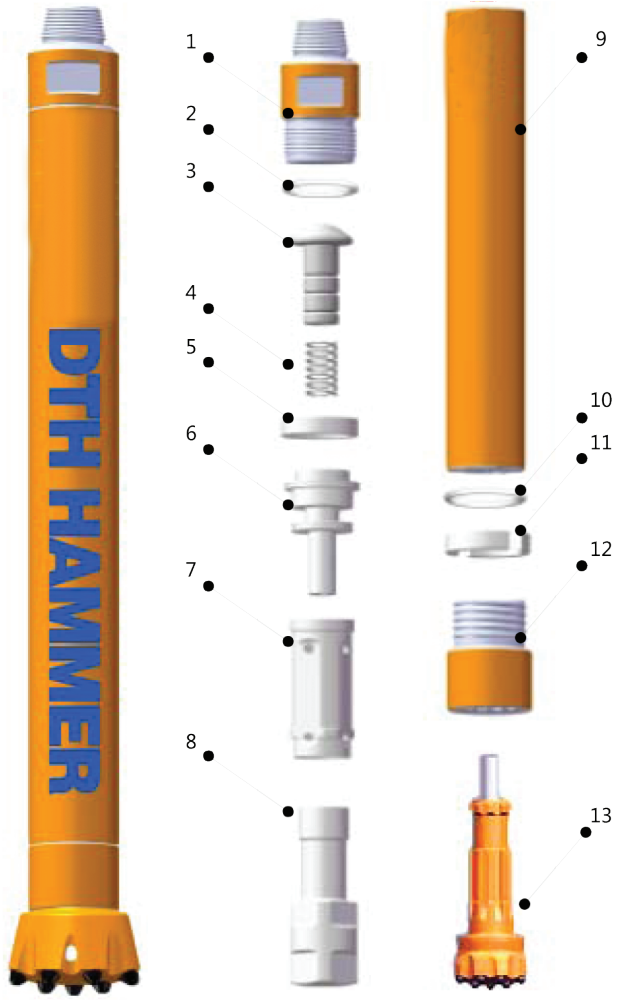

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	4.20	9.26	DHH3501
2	O-ring of top sub	0.01	0.02	DHH3502
3	Check valve	0.20	0.44	DHH3503
4	Spring	0.02	0.04	DHH3504
5	Compression buffer	0.02	0.04	DHH3505
6	Air distributor	1.40	3.09	DHH3506
7	Internal cylinder	1.50	3.31	DHH3507
8	Piston	5.60	12.35	DHH3508
9	External cylinder	9.90	21.83	DHH3509
10	O-ring of stop ring	0.01	0.02	DHH3510
11	Stop ring	0.15	0.33	DHH3511
12	Driver sub	1.90	4.19	DHH3512
13	Drill bit			DHH3513

Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
25.00	55.12	82	3.23	930	36.61	90 - 110	3.54 - 4.33	DHD3.5


Connection thread	Working pressure	Impact rate at 1.5 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
2 3/8" API reg.	1.0 - 2.5	28	25 - 40	200 - 600

DTH hammer - Valveless

DHH35(W)

High air pressure without foot valve

3"

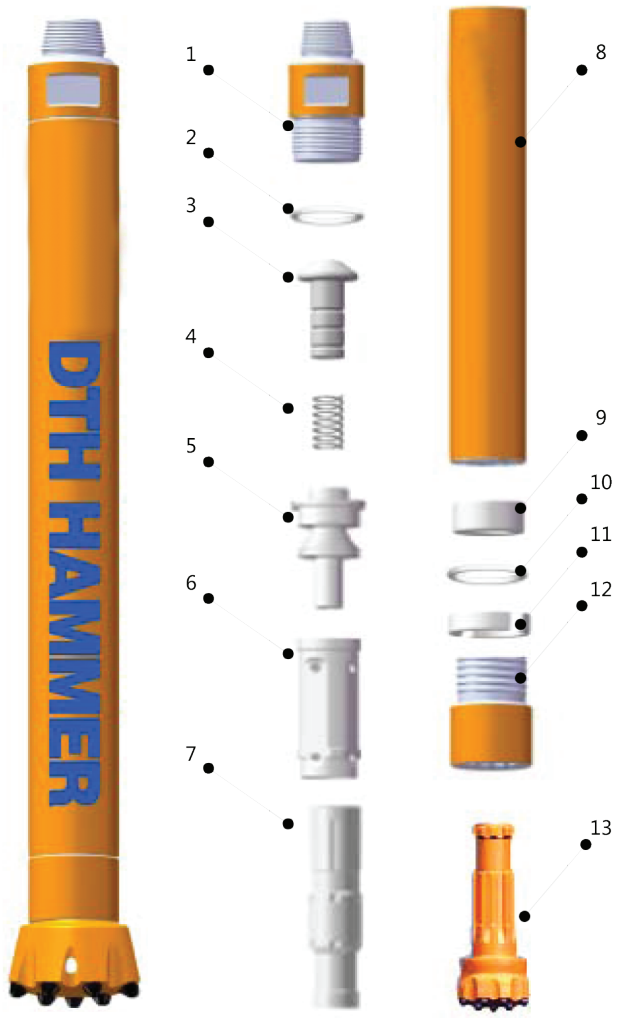

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	4.50	9.92	DHH35W01
2	O-ring of top sub	0.01	0.02	DHH35W02
3	Check valve	0.30	0.66	DHH35W03
4	Spring	0.02	0.04	DHH35W04
5	Air distributor	1.00	2.20	DHH35W05
6	Internal cylinder	1.50	3.31	DHH35W06
7	Piston	5.50	12.13	DHH35W07
8	External cylinder	10.00	22.05	DHH35W08
9	Guided sleeve	1.00	2.20	DHH35W09
10	O-ring of stop ring	0.05	0.11	DHH35W10
11	Stop ring	0.15	0.33	DHH35W11
12	Drive sub	2.00	4.41	DHH35W12
13	Drill bit			DHH35W13

Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
25.00	55.12	82	3.23	888	34.96	90 - 115	3.54 - 4.53	IR3.5

Connection thread	Working pressure	Impact rate at 1.5 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
2 3/8" API reg.	1.0 - 1.5	25	25 - 40	200 - 600

DTH drill bits

3"


Button bits	Part No.	D		Buttons				Flushing	Angle	Weight	Available types
		[mm]	[in]	[No.]	[mm]	[No.]	[mm]	[No.]	[°]	[kg]	
	DHB90COP32FF	90	3 9/16	6	× 14	4	× 12	2	38	4.5	CC*, CV*
	DHB92COP32FF	92	3 5/8	6	× 14	4	× 12	2	38	4.5	CC*, CV*
	DHB95COP32FF	95	3 3/4	6	× 14	4	× 13	2	38	4.7	CC*, CV*
	DHB100COP32FF	100	3 15/16	6	× 14	5	× 13	2	38	5.0	CC*, CV*
	DHB105COP32FF	105	4 1/8	6	× 14	5	× 13	2	38	5.3	CC*, CV*
COP32	DHB110COP32FF	110	4 5/16	8	× 14	6	× 13	2	38	5.5	CC*, CV*
	DHB90BR3FF	90	3 9/16	6	× 14	4	× 12	2	38	4.0	CC*, CV*
	DHB92BR3FF	92	3 5/8	6	× 14	4	× 12	2	38	4.0	CC*, CV*
	DHB95BR3FF	95	3 3/4	6	× 14	4	× 13	2	38	4.3	CC*, CV*
	DHB100BR3FF	100	3 15/16	6	× 14	5	× 13	2	38	4.8	CC*, CV*
	DHB105BR3FF	105	4 1/8	6	× 14	5	× 13	2	38	5.2	CC*, CV*
BR3	DHB110BR3FF	110	4 5/16	8	× 14	6	× 13	2	38	5.4	CC*, CV*
	DHB90M30FF	90	3 9/16	6	× 14	4	× 12	2	38	3.8	CC*, CV*
	DHB92M30FF	92	3 5/8	6	× 14	4	× 12	2	38	3.8	CC*, CV*
	DHB95M30FF	95	3 3/4	6	× 14	4	× 13	2	38	4.0	CC*, CV*
	DHB100M30FF	100	3 15/16	6	× 14	5	× 13	2	38	4.5	CC*, CV*
	DHB105M30FF	105	4 1/8	6	× 14	5	× 13	2	38	5.0	CC*, CV*
M30	DHB110M30FF	110	4 5/16	8	× 14	6	× 13	2	38	5.2	CC*, CV*
	DHB90DHH35FF	90	3 9/16	6	× 14	4	× 12	2	38	4.6	CC*, CV*
	DHB92DHH35FF	92	3 5/8	6	× 14	4	× 12	2	38	4.6	CC*, CV*
	DHB95DHH35FF	95	3 3/4	6	× 14	4	× 13	2	38	4.7	CC*, CV*
	DHB100DHH35FF	100	3 15/16	6	× 14	5	× 13	2	38	4.8	CC*, CV*
	DHB105DHH35FF	105	4 1/8	6	× 14	5	× 13	2	38	5.0	CC*, CV*
DHD3.5 / COP34	DHB110DHH35FF	110	4 5/16	8	× 14	6	× 13	2	38	5.5	CC*, CV*
	DHB90QL30FF	90	3 9/16	6	× 14	4	× 12	2	38	5.0	CC*, CV*
	DHB92QL30FF	92	3 5/8	6	× 14	4	× 12	2	38	5.0	CC*, CV*
	DHB95QL30FF	95	3 3/4	6	× 14	4	× 13	2	38	5.2	CC*, CV*
	DHB100QL30FF	100	3 15/16	6	× 14	5	× 13	2	38	5.3	CC*, CV*
	DHB105QL30FF	105	4 1/8	6	× 14	5	× 13	2	38	5.5	CC*, CV*
QL30	DHB110QL30FF	110	4 5/16	8	× 14	6	× 13	2	38	6.0	CC*, CV*

*CC: Concave; CV: Convex; FF: Flat face.

DHH45

4"

High air pressure with foot valve

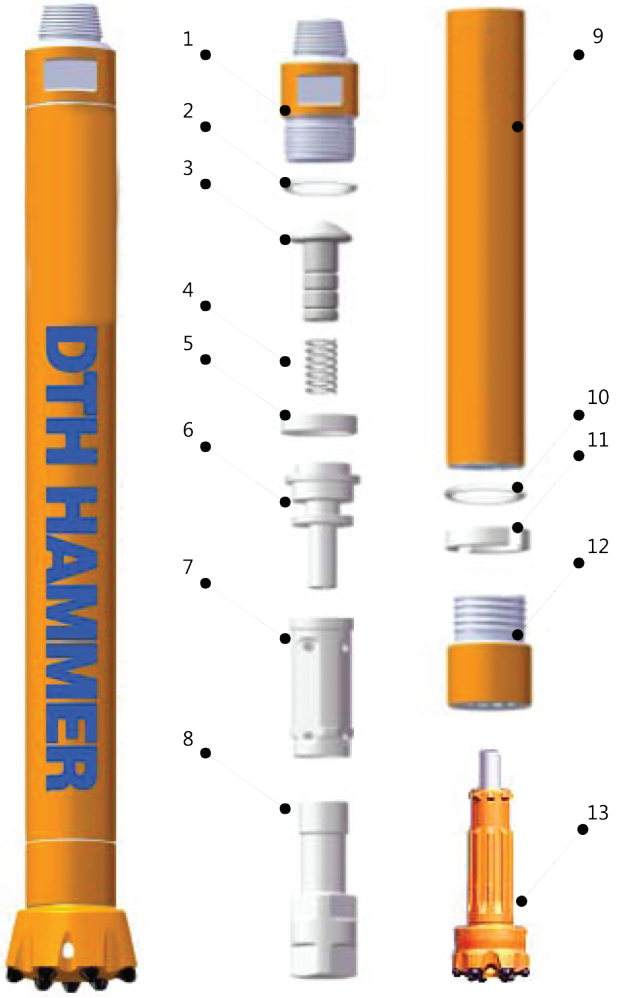

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	6.50	14.33	DHH4501
2	O-ring of top sub	0.01	0.02	DHH4502
3	Check valve	0.42	0.93	DHH4503
4	Spring	0.04	0.09	DHH4504
5	Compression buffer	0.04	0.09	DHH4505
6	Air distributor	2.20	4.85	DHH4506
7	Internal cylinder	2.30	5.07	DHH4507
8	Piston	9.00	19.84	DHH4508
9	External cylinder	15.00	33.07	DHH4509
10	O-ring of stop ring	0.01	0.02	DHH4510
11	Stop ring	0.20	0.44	DHH4511
12	Driver sub	3.50	7.72	DHH4512
13	Drill bit			DHH4513

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
39.00	85.98	99	3.90	1030	40.55	110 - 135	4.33 - 5.31	COP44 DHD340A

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
2 3/8" API reg.	1.0 - 2.5	27	25 - 40	200 - 600

DHH45(W)

4"

High air pressure without foot valve

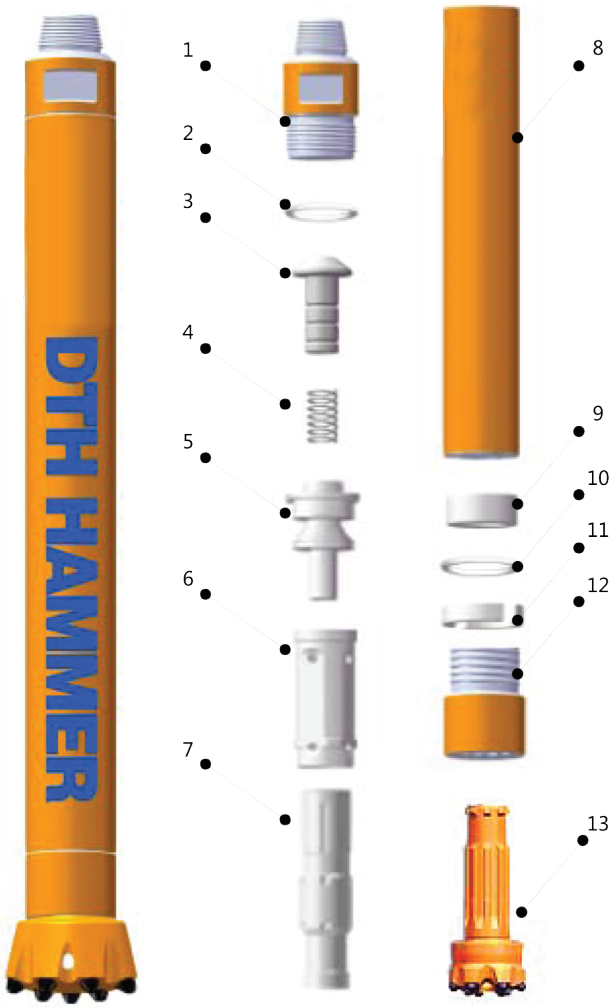

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	7.00	15.43	DHH45W01
2	O-ring of top sub	0.01	0.02	DHH45W02
3	Check valve	0.50	1.10	DHH45W03
4	Spring	0.05	0.11	DHH45W04
5	Air distributor	1.50	3.31	DHH45W05
6	Internal cylinder	2.50	5.51	DHH45W06
7	Piston	9.00	19.84	DHH45W07
8	External cylinder	15.20	33.51	DHH45W08
9	Guided sleeve	1.50	3.31	DHH45W09
10	O-ring of stop ring	0.01	0.02	DHH45W10
11	Stop ring	0.20	0.44	DHH45W11
12	Drive sub	4.00	8.82	DHH45W12
13	Drill bit			DHH45W13

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
43.20	95.24	99	3.90	1011	39.80	110 - 135	4.33 - 5.31	COP44 DHD340A

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
2 3/8" API reg.	1.0 - 2.5	30	22 - 35	200 - 600

DHH45S(W)

4"

High air pressure without foot valve

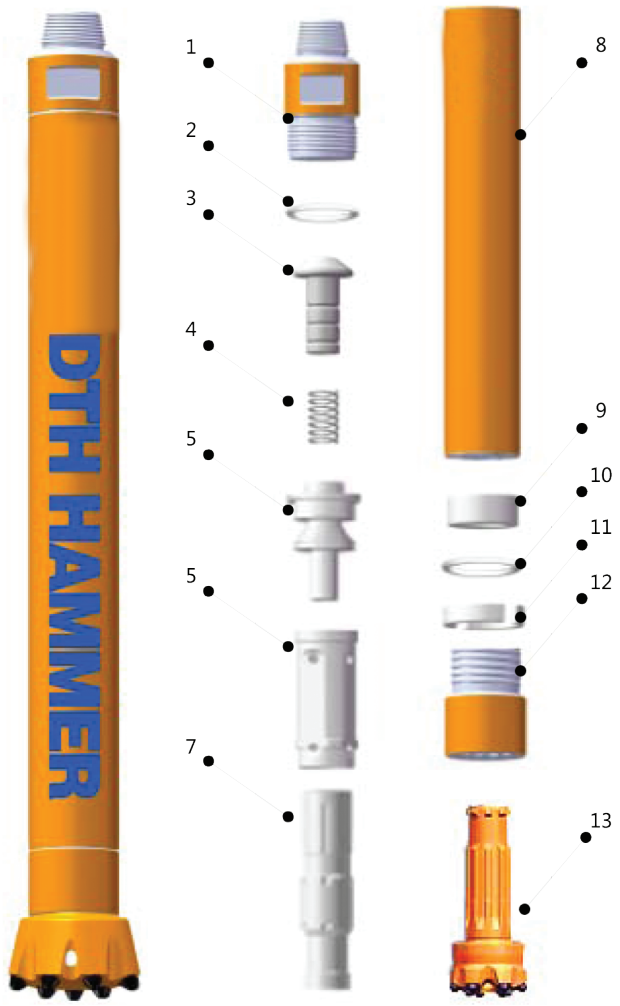

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	6.00	13.23	DHH45SW01
2	O-ring of top sub	0.01	0.02	DHH45SW02
3	Check valve	0.50	1.10	DHH45SW03
4	Spring	0.05	0.11	DHH45SW04
5	Air distributor	1.30	2.87	DHH45SW05
6	Internal cylinder	1.90	4.19	DHH45SW06
7	Piston	7.80	17.20	DHH45SW07
8	External cylinder	14.60	32.19	DHH45SW08
9	Guided sleeve	1.20	2.65	DHH45SW09
10	O-ring of stop ring	0.01	0.01	DHH45SW10
11	Stop ring	0.20	0.44	DHH45SW11
12	Drive sub	3.40	7.50	DHH45SW12
13	Drill bit			DHH45SW13

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
37.00	81.57	92	3.62	986	38.82	105 - 120	4.13 - 4.72	COP44 DHD340A

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
2 3/8" API reg.	1.0 - 2.5	30	25 - 40	200 - 600

DHQ40

4"

High air pressure with foot valve

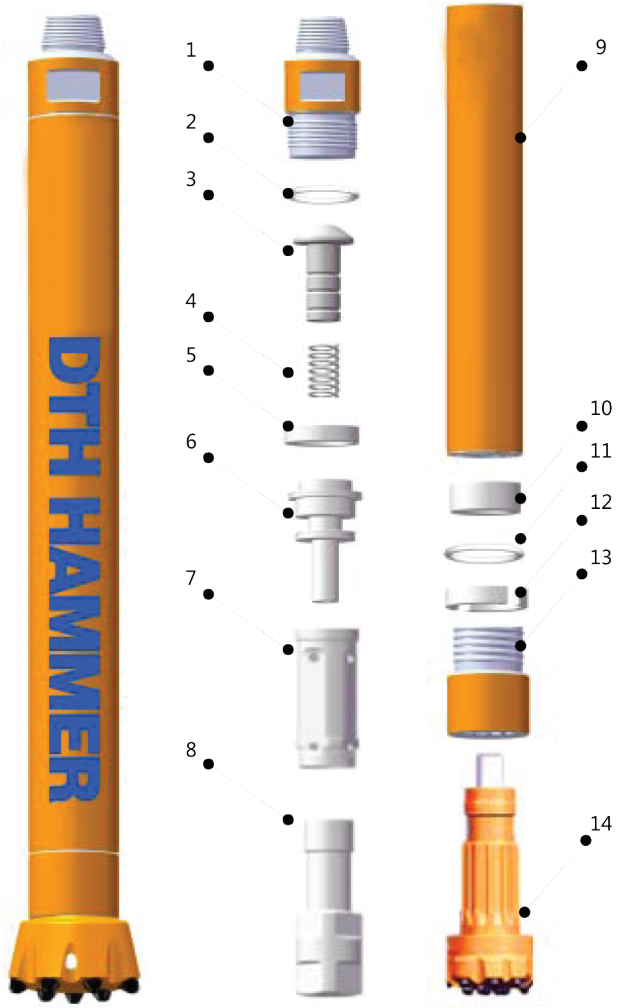

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	6.50	14.33	DHQ4001
2	O-ring of top sub	0.01	0.02	DHQ4002
3	Check valve	0.42	0.93	DHQ4003
4	Spring	0.04	0.09	DHQ4004
5	Compression buffer	0.04	0.09	DHQ4005
6	Air distributor	2.50	5.51	DHQ4006
7	Internal cylinder	2.30	5.07	DHQ4007
8	Piston	9.00	19.84	DHQ4008
9	External cylinder	17.00	37.48	DHQ4009
10	Guided sleeve	0.80	1.76	DHQ4010
11	O-ring of stop ring	0.01	0.02	DHQ4011
12	Stop ring	0.30	0.66	DHQ4012
13	Drive sub	3.00	6.61	DHQ4013
14	Drill bit			DHQ4014

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
41.00	90.39	99	3.90	1097	43.19	110 - 135	4.33 - 5.31	QL40

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
2 3/8" API reg.	1.0 - 2.5	27	25 - 40	200 - 600

DHQ40(W)

4"

High air pressure without foot valve

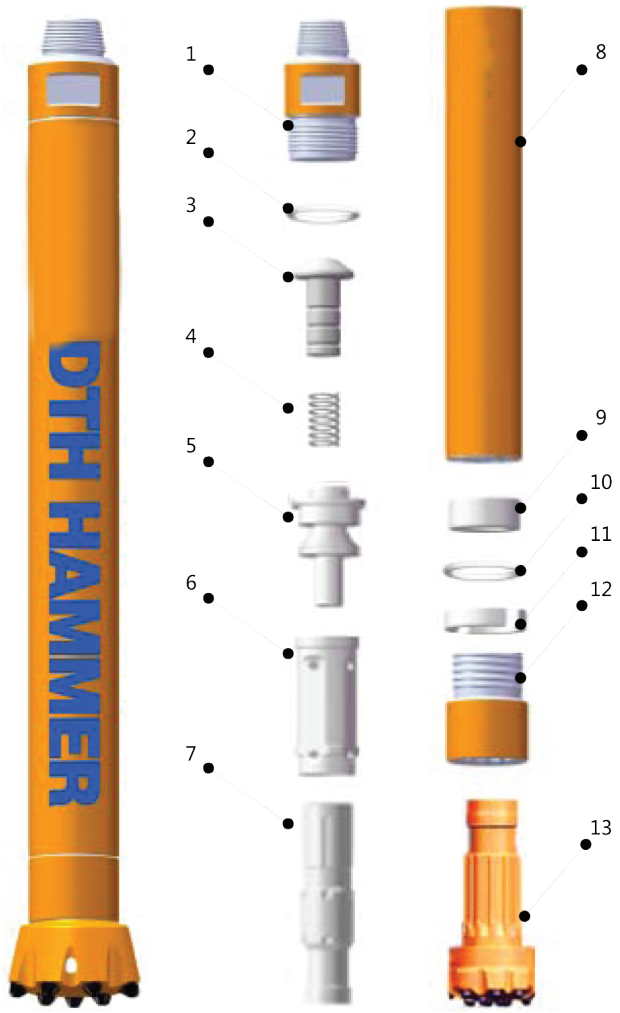

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	6.50	14.33	DHQ40W01
2	O-ring of top sub	0.01	0.02	DHQ40W02
3	Check valve	0.35	0.77	DHQ40W03
4	Spring	0.05	0.11	DHQ40W04
5	Air distributor	1.50	3.31	DHQ40W05
6	Internal cylinder	2.10	4.63	DHQ40W06
7	Piston	8.50	18.74	DHQ40W07
8	External cylinder	15.20	33.51	DHQ40W08
9	Guided sleeve	1.80	3.97	DHQ40W09
10	O-ring of stop ring	0.01	0.02	DHQ40W10
11	Stop ring	0.20	0.44	DHQ40W11
12	Drive sub	3.20	7.05	DHQ40W12
13	Drill bit			DHQ40W13

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
40.00	88.18	99	3.90	1070	42.13	110 - 135	4.33 - 5.31	QL40

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
2 3/8" API reg.	1.0 - 2.5	30	25 - 40	200 - 600

DSD4

High air pressure with foot valve

4"

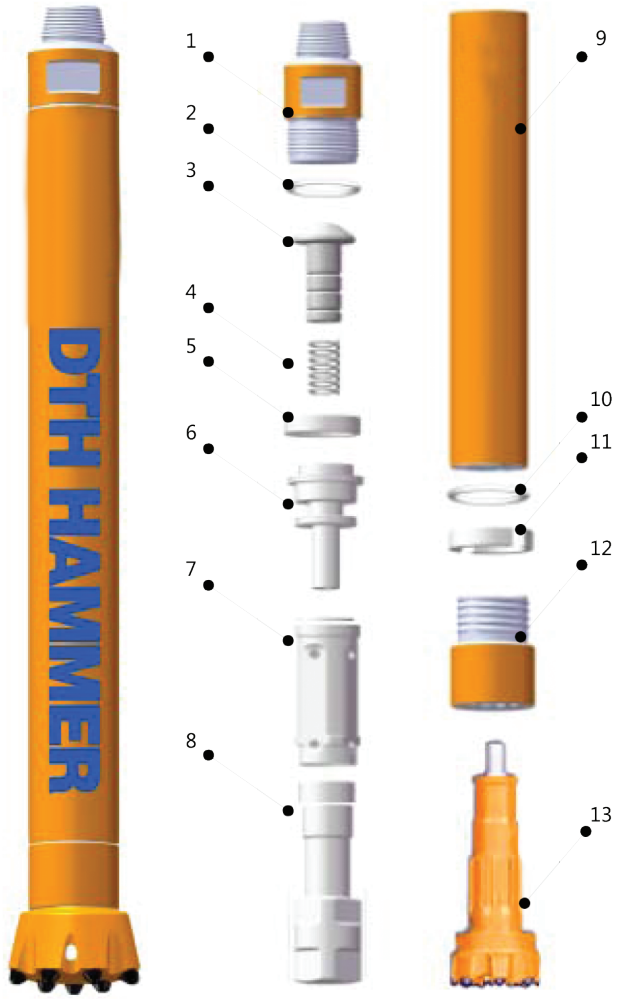

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top Sub	6.50	14.33	DSD401
2	"O" Ring of Top Sub	0.01	0.02	DSD402
3	Check Valve	0.42	0.93	DSD403
4	Spring	0.04	0.09	DSD404
5	Compression Buffer	0.04	0.09	DSD405
6	Air Distributor	2.20	4.85	DSD406
7	Internal Cylinder	2.50	5.51	DSD407
8	Piston	9.00	19.84	DSD408
9	External Cylinder	15.60	34.39	DSD409
10	"O" Ring of Stop Ring	0.02	0.04	DSD410
11	Stop Ring	0.20	0.44	DSD411
12	Drive Chuck	4.00	8.82	DSD412
13	Drill Bit			DSD413

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
40.50	89.29	99	3.90	1084	42.68	110 - 135	4.33 - 5.31	SD4

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
2 3/8" API reg.	1.0 - 2.5	27	25 - 40	200 - 600

DHM4(W)

4"

High air pressure without foot valve

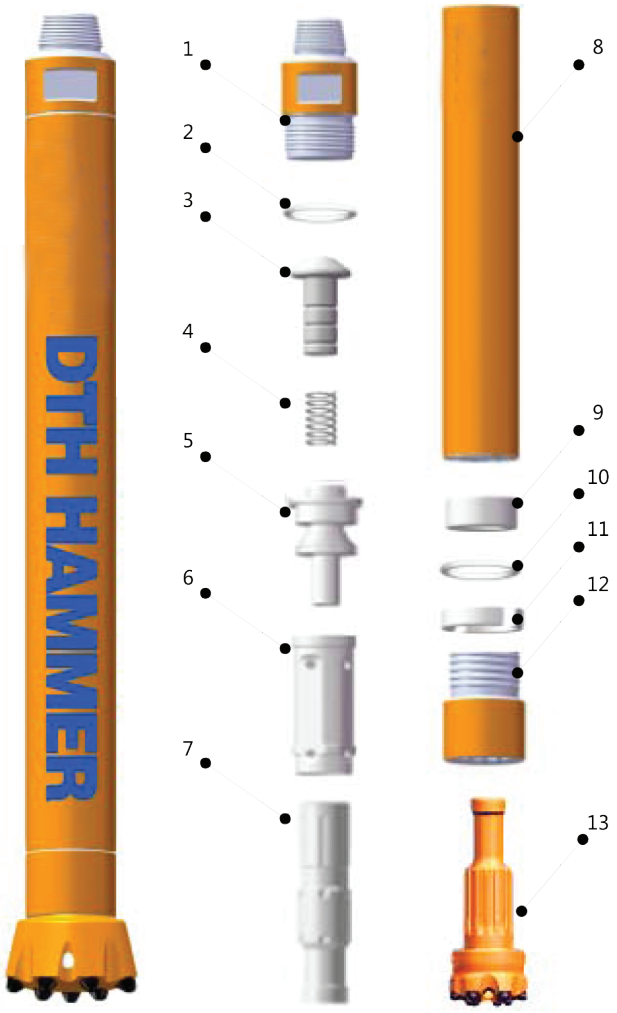

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	6.50	14.33	DHM4W01
2	O-ring of top sub	0.01	0.02	DHM4W02
3	Check valve	0.35	0.77	DHM4W03
4	Spring	0.05	0.11	DHM4W04
5	Air distributor	1.50	3.31	DHM4W05
6	Internal cylinder	2.10	4.63	DHM4W06
7	Piston	8.50	18.74	DHM4W07
8	External cylinder	14.80	32.63	DHM4W08
9	Guided sleeve	1.80	3.97	DHM4W09
10	O-ring of stop ring	0.01	0.01	DHM4W10
11	Stop ring	0.30	0.66	DHM4W11
12	Drive sub	3.80	8.38	DHM4W12
13	Drill bit			DHM4W13

Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
40.00	88.18	99	3.90	1005	39.57	110 - 135	4.33 - 5.31	HM4

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
2 3/8" API reg.	1.0 - 2.5	30	25 - 40	200 - 600

DTH drill bits

4"

Button bits	Part No.	D		Buttons				Flushing	Angle	Weight	Available types
		[mm]	[in]	[No.]	[mm]	[No.]	[mm]	[No.]	[°]	[kg]	
	DHB105M40FF	105	4 1/8	6	× 14	5	× 13	2	38	6.0	CC*, CV*
	DHB110M40FF	110	4 5/16	7	× 14	6	× 13	2	38	6.2	CC*, CV*
	DHB115M40FF	115	4 1/2	8	× 14	7	× 13	2	38	6.6	CC*, CV*
	DHB120M40FF	120	4 3/4	8	× 14	7	× 13	2	38	7.0	CC*, CV*
	DHB125M40FF	125	4 15/16	8	× 14	7	× 13	2	38	7.4	CC*, CV*
M40	DHB130M40FF	130	5 1/8	8	× 16	7	× 14	2	38	8.0	CC*, CV*
	DHB105DHH45FF	105	4 1/8	6	× 14	5	× 13	2	38	7.6	CC*, CV*
	DHB110DHH45FF	110	4 5/16	7	× 14	6	× 13	2	38	7.8	CC*, CV*
	DHB115DHH45FF	115	4 1/2	8	× 14	7	× 13	2	38	8.2	CC*, CV*
	DHB120DHH45FF	120	4 3/4	8	× 14	7	× 13	2	38	8.7	CC*, CV*
	DHB125DHH45FF	125	4 15/16	8	× 14	7	× 13	2	38	8.9	CC*, CV*
DHD340A / COP44	DHB130DHH45FF	130	5 1/8	8	× 16	7	× 14	2	38	9.4	CC*, CV*
	DHB105SD4FF	105	4 1/8	6	× 14	5	× 13	2	38	9.0	CC*, CV*
	DHB110SD4FF	110	4 5/16	7	× 14	6	× 13	2	38	9.5	CC*, CV*
	DHB115SD4FF	115	4 1/2	8	× 14	7	× 13	2	38	9.8	CC*, CV*
	DHB120SD4FF	120	4 3/4	8	× 14	7	× 13	2	38	11.5	CC*, CV*
	DHB125SD4FF	125	4 15/16	8	× 14	7	× 13	2	38	12.3	CC*, CV*
SD4	DHB130SD4FF	130	5 1/8	8	× 16	7	× 14	2	38	12.8	CC*, CV*
	DHB105QL40FF	105	4 1/8	6	× 14	5	× 13	2	38	9.0	CC*, CV*
	DHB110QL40FF	110	4 5/16	7	× 14	6	× 13	2	38	9.2	CC*, CV*
	DHB115QL40FF	115	4 1/2	8	× 14	7	× 13	2	38	9.5	CC*, CV*
	DHB120QL40FF	120	4 3/4	8	× 14	7	× 13	2	38	10.3	CC*, CV*
	DHB125QL40FF	125	4 15/16	8	× 14	7	× 13	2	38	11.5	CC*, CV*
QL40	DHB130QL40FF	130	5 1/8	8	× 16	7	× 14	2	38	12.0	CC*, CV*


*CC: Concave; CV: Convex; FF: Flat face.

DTH hammer - Valved

DHH55

5"

High air pressure with foot valve

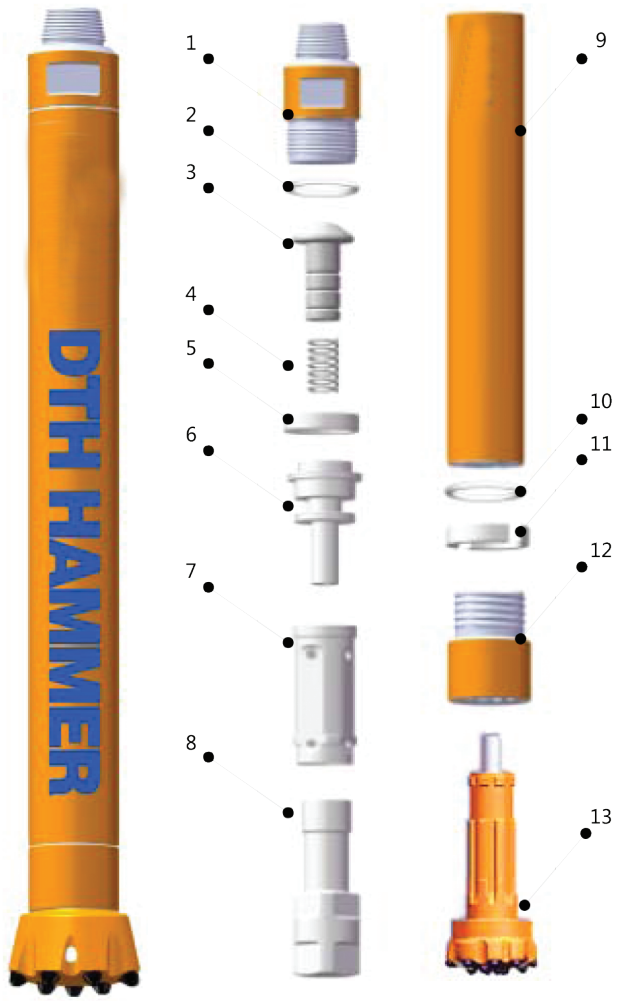

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	15.00	33.07	DHH5501
2	O-ring of top sub	0.01	0.02	DHH5502
3	Check valve	1.00	2.20	DHH5503
4	Spring	0.04	0.09	DHH5504
5	Compression buffer	0.06	0.13	DHH5505
6	Air distributor	5.00	11.02	DHH5506
7	Internal cylinder	4.00	8.82	DHH5507
8	Piston	16.00	35.27	DHH5508
9	External cylinder	30.00	66.14	DHH5509
10	O-ring of stop ring	0.01	0.02	DHH5510
11	Stop ring	0.30	0.66	DHH5511
12	Driver sub	7.00	15.43	DHH5512
13	Drill bit			DHH5513

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
79.00	174.17	125	4.92	1214	47.80	135 - 155	5.31 - 6.10	COP54 DHD350R

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
2 3/8" API reg. 3 1/2" API reg.	1.0 - 2.5	25	20 - 35	600 - 836

DHH55(W)

5"

High air pressure without foot valve

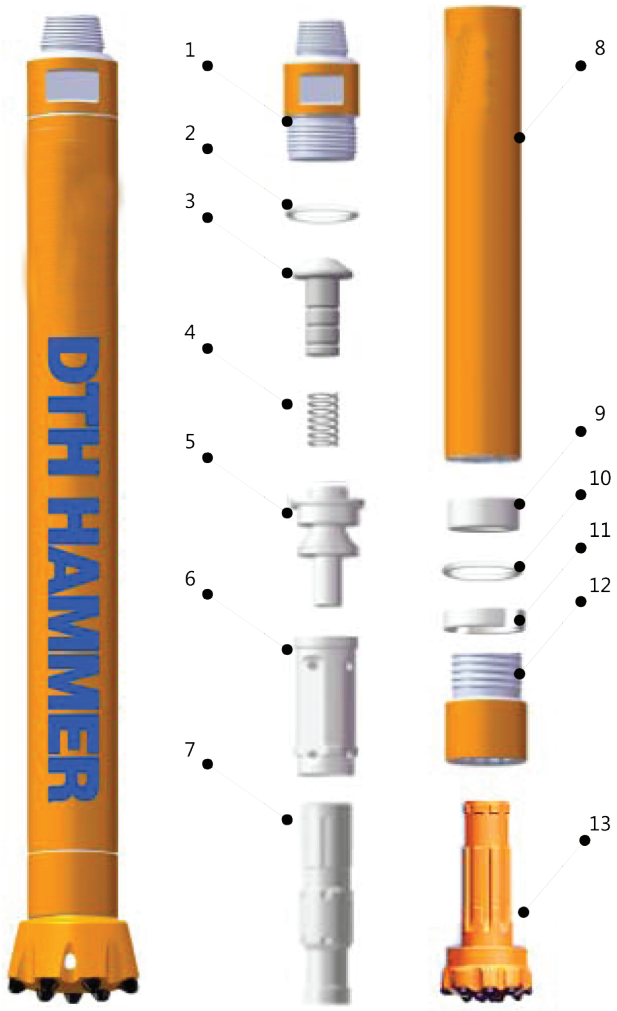

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	15.00	33.07	DHH55W01
2	O-ring of top sub	0.02	0.03	DHH55W02
3	Check valve	0.70	1.54	DHH55W03
4	Spring	0.10	0.22	DHH55W04
5	Air distributor	2.00	4.41	DHH55W05
6	Internal cylinder	2.80	6.17	DHH55W06
7	Piston	15.00	33.07	DHH55W07
8	External cylinder	24.00	52.91	DHH55W08
9	Guided sleeve	2.60	5.73	DHH55W09
10	O-ring of stop ring	0.01	0.02	DHH55W10
11	Stop ring	0.50	1.10	DHH55W11
12	Drive sub	7.00	15.43	DHH55W12
13	Drill bit			DHH55W13

Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
69.00	152.12	125	4.92	1110	43.70	135 - 155	5.31 - 6.10	COP54 DHD350R


Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
2 3/8" API reg. 3 1/2" API reg.	1.0 - 2.5	28	20 - 35	600 - 836

DTH hammer - Valveless

DHH55S(W)

High air pressure without foot valve

5"

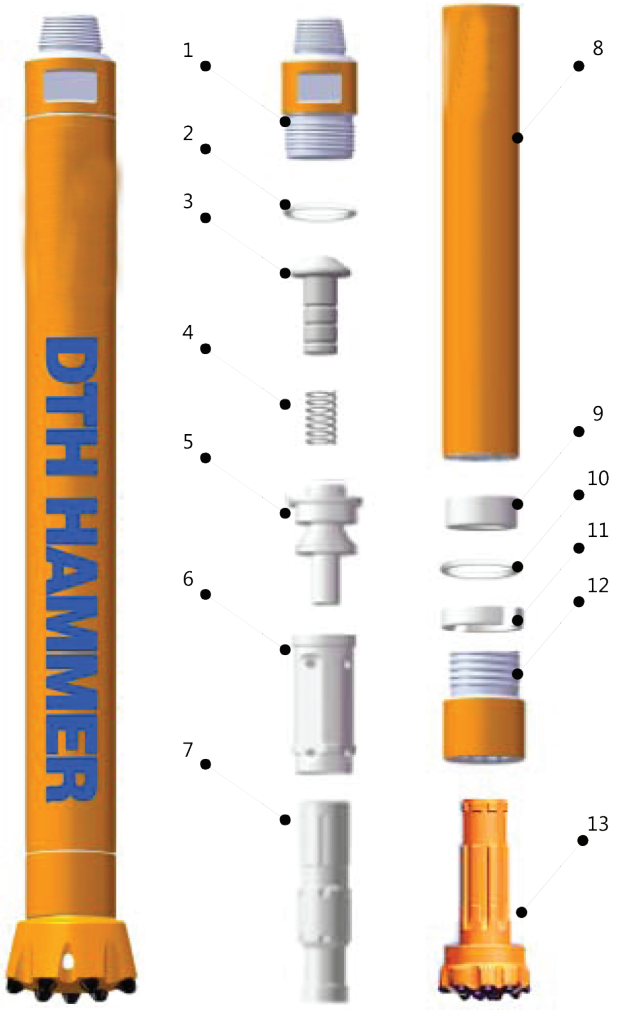

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	10.00	22.05	DHH55SW01
2	O-ring of top sub	0.02	0.03	DHH55SW02
3	Check valve	0.70	1.54	DHH55SW03
4	Spring	0.10	0.22	DHH55SW04
5	Air distributor	2.00	4.41	DHH55SW05
6	Internal cylinder	3.50	7.72	DHH55SW06
7	Piston	11.00	24.25	DHH55SW07
8	External cylinder	21.00	46.30	DHH55SW08
9	Guided sleeve	2.00	4.41	DHH55SW09
10	O-ring of stop ring	0.01	0.02	DHH55SW10
11	Stop ring	0.50	1.10	DHH55SW11
12	Drive sub	5.00	11.02	DHH55SW12
13	Drill bit			DHH55SW13

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
56.00	123.46	116	4.57	1110	43.70	127 - 145	5.00 - 5.71	COP54 DHD350R

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
2 3/8" API reg. 3 1/2" API reg.	1.0 - 2.5	28	20 - 35	600 - 836

DSD5

High air pressure with foot valve

5"

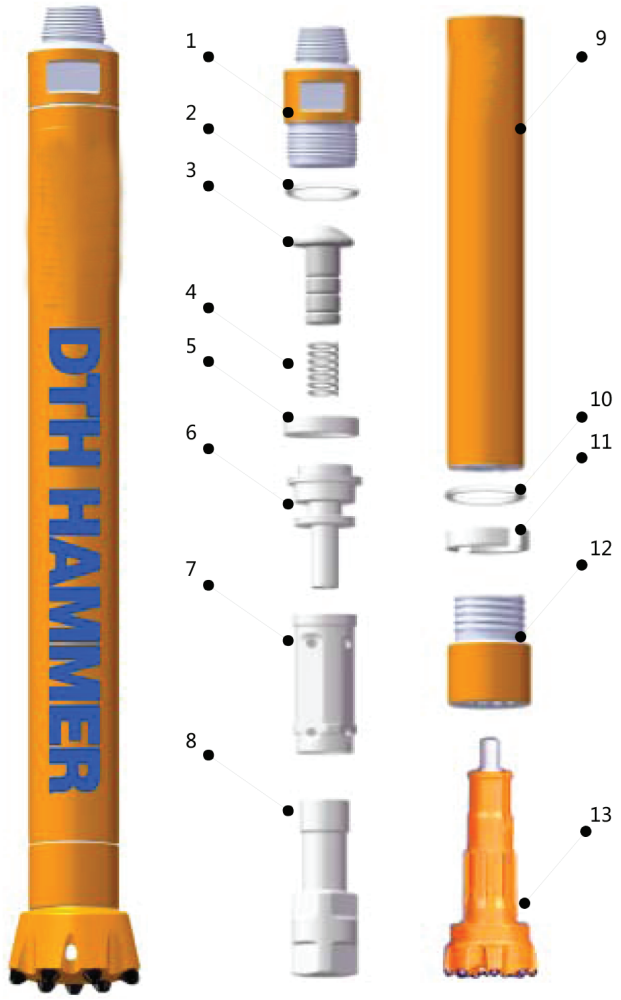

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	15.00	33.07	DSD501
2	O-ring of top sub	0.01	0.02	DSD502
3	Check valve	1.00	2.20	DSD503
4	Spring	0.10	0.22	DSD504
5	Compression buffer	0.05	0.11	DSD505
6	Air distributor	3.50	7.72	DSD506
7	Internal cylinder	4.20	9.26	DSD507
8	Piston	15.50	34.17	DSD508
9	External cylinder	25.00	55.12	DSD509
10	O-ring of stop ring	0.01	0.02	DSD510
11	Stop ring	0.50	1.10	DSD511
12	Driver sub	7.50	16.53	DSD512
13	Drill bit			DSD513

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
72.50	159.84	125	4.92	1175	46.26	135 - 155	5.31 - 6.10	SD5

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
3 1/2" API reg.	1.0 - 2.5	25	20 - 35	600 - 836

DSD5(W)

5"

High air pressure without foot valve

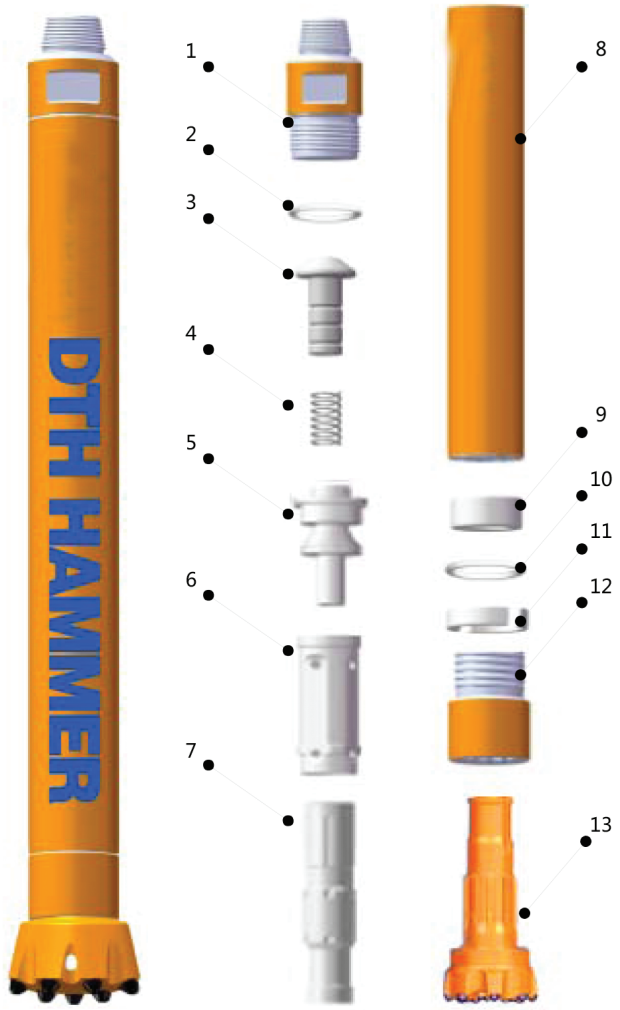

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	15.00	33.07	DSD5W01
2	O-ring of top sub	0.01	0.02	DSD5W02
3	Check valve	0.35	0.77	DSD5W03
4	Spring	0.05	0.11	DSD5W04
5	Air distributor	2.00	4.41	DSD5W05
6	Internal cylinder	2.70	5.95	DSD5W06
7	Piston	15.00	33.07	DSD5W07
8	External cylinder	25.00	55.12	DSD5W08
9	Guided sleeve	1.30	2.87	DSD5W09
10	O-ring of stop ring	0.01	0.01	DSD5W10
11	Stop ring	0.20	0.44	DSD5W11
12	Drive sub	8.00	17.64	DSD5W12
13	Drill bit			DSD5W13

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
70.00	154.32	125	4.92	1090	42.91	135 - 155	5.31 - 6.10	SD5

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
2 3/8" API reg. 3 1/2" API reg.	1.0 - 2.5	28	20 - 35	600 - 836

DHQ50

High air pressure with foot valve

5"

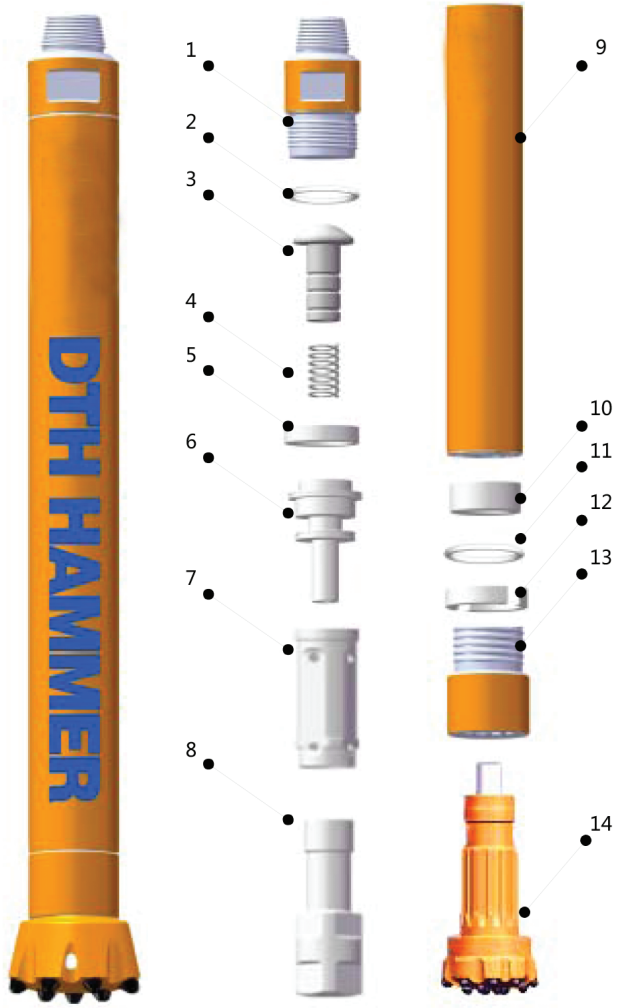

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	15.00	33.07	DHQ5001
2	O-ring of top sub	0.02	0.03	DHQ5002
3	Check valve	1.00	2.20	DHQ5003
4	Spring	0.10	0.22	DHQ5004
5	Compression buffer	0.10	0.22	DHQ5005
6	Air distributor	3.50	7.72	DHQ5006
7	Internal cylinder	4.20	9.26	DHQ5007
8	Piston	19.00	41.89	DHQ5008
9	External cylinder	24.60	54.23	DHQ5009
10	Guided sleeve	0.90	1.98	DHQ5010
11	O-ring of stop ring	0.01	0.02	DHQ5011
12	Stop ring	0.40	0.88	DHQ5012
13	Drive sub	4.60	10.14	DHQ5013
14	Drill bit			DHQ5014

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
73.00	160.94	125	4.92	1156	45.51	135 - 155	5.31 - 6.10	QL50

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
3 1/2" API reg.	1.0 - 2.5	25	20 - 30	600 - 836

DHQ50(W)

5"

High air pressure without foot valve

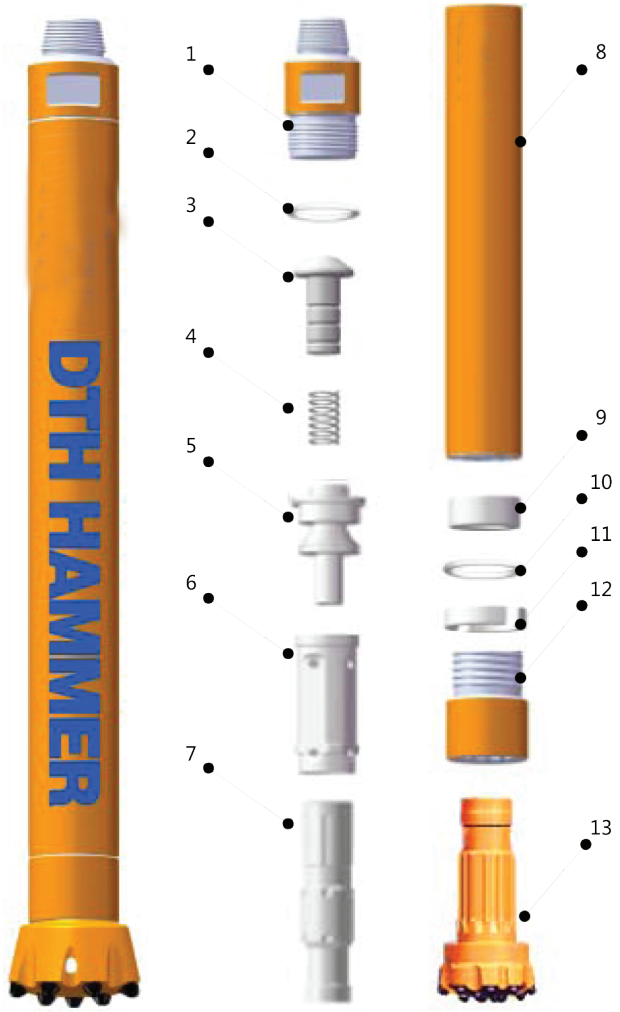

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	15.00	33.07	DHQ50W01
2	O-ring of top sub	0.02	0.03	DHQ50W02
3	Check valve	0.70	1.54	DHQ50W03
4	Spring	0.10	0.22	DHQ50W04
5	Air distributor	2.00	4.41	DHQ50W05
6	Internal cylinder	2.70	5.95	DHQ50W06
7	Piston	15.00	33.07	DHQ50W07
8	External cylinder	24.00	52.91	DHQ50W08
9	Guided sleeve	3.00	6.61	DHQ50W09
10	O-ring of stop ring	0.01	0.02	DHQ50W10
11	Stop ring	0.40	0.88	DHQ50W11
12	Drive sub	5.00	11.02	DHQ50W12
13	Drill bit			DHQ50W13

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
67.00	147.71	125	4.92	1090	42.91	135 - 155	5.31 - 6.10	QL50

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
2 3/8" API reg. 3 1/2" API reg.	1.0 - 2.5	28	20 - 35	600 - 836

DHM5(W)

5"

High air pressure without foot valve

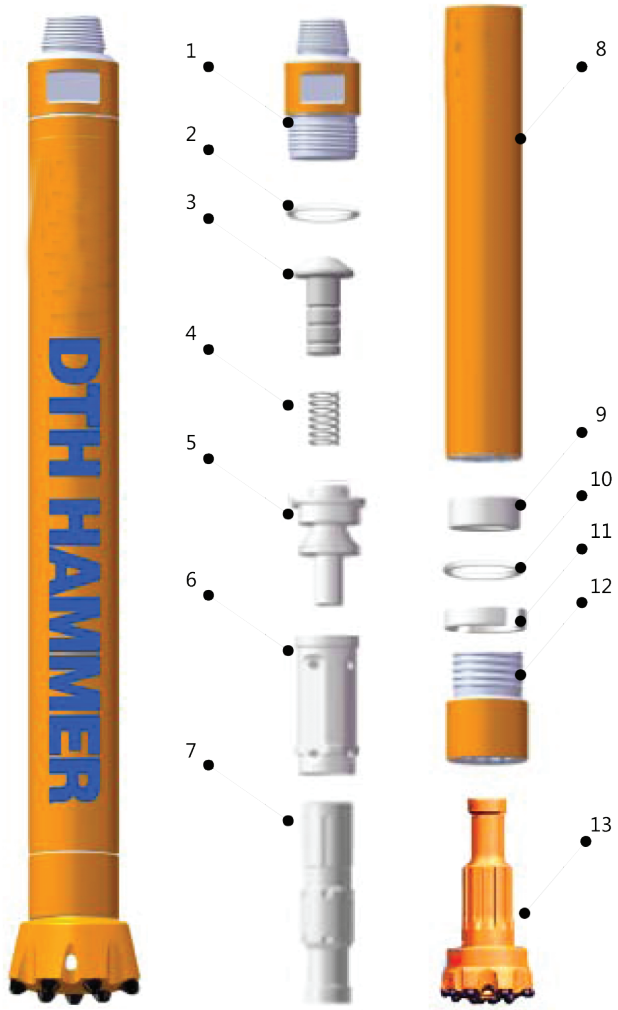

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	15.00	33.07	DHM5W01
2	O-ring of top sub	0.02	0.03	DHM5W02
3	Check valve	0.70	1.54	DHM5W03
4	Spring	0.10	0.22	DHM5W04
5	Air distributor	2.00	4.41	DHM5W05
6	Internal cylinder	3.50	7.72	DHM5W06
7	Piston	15.00	33.07	DHM5W07
8	External cylinder	24.00	52.91	DHM5W08
9	Guided sleeve	3.00	6.61	DHM5W09
10	O-ring of stop ring	0.01	0.02	DHM5W10
11	Stop ring	0.70	1.54	DHM5W11
12	Drive sub	7.00	15.43	DHM5W12
13	Drill bit			DHM5W13

Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
73.00	160.94	125	4.92	1110	43.70	135 - 155	5.31 - 6.10	HM5

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
2 3/8" API reg. 3 1/2" API reg.	1.0 - 2.5	28	20 - 35	600 - 836

DTH drill bits

5"


Button bits	Part No.	D		Buttons				Flushing	Angle	Weight	Available types
		[mm]	[in]	[No.]	[mm]	[No.]	[mm]	[No.]	[°]	[kg]	
	DHB130M50FF	130	5 1/8	8	× 16	8	× 14	2	38	12.0	CC*, CV*
	DHB135M50FF	135	5 1/4	8	× 16	8	× 14	2	38	12.3	CC*, CV*
	DHB138M50FF	138	5 1/2	8	× 16	8	× 14	2	38	13.0	CC*, CV*
	DHB140M50FF	140	5 1/2	8	× 16	10	× 14	2	38	13.5	CC*, CV*
	DHB146M50FF	146	5 3/4	8	× 18	8	× 15	2	38	14.0	CC*, CV*
	DHB150M50FF	150	5 7/8	8	× 18	8	× 15	2	38	14.2	CC*, CV*
	DHB152M50FF	152	6	8	× 18	8	× 15	2	38	14.4	CC*, CV*
M50	DHB156M50FF	156	6 1/8	8	× 18	8	× 16	2	38	14.6	CC*, CV*
	DHB130DHH55FF	130	5 1/8	8	× 16	8	× 14	2	38	15.0	CC*, CV*
	DHB135DHH55FF	135	5 1/4	8	× 16	8	× 14	2	38	15.2	CC*, CV*
	DHB138DHH55FF	138	5 1/2	8	× 16	8	× 14	2	38	15.6	CC*, CV*
	DHB140DHH55FF	140	5 1/2	8	× 16	10	× 14	2	38	15.8	CC*, CV*
	DHB146DHH55FF	146	5 3/4	8	× 18	8	× 15	2	38	16.1	CC*, CV*
	DHB150DHH55FF	150	5 7/8	8	× 18	8	× 15	2	38	16.5	CC*, CV*
	DHB152DHH55FF	152	6	8	× 18	8	× 15	2	38	17.0	CC*, CV*
DHD350R / COP54	DHB156DHH55FF	156	6 1/8	8	× 18	8	× 16	2	38	17.5	CC*, CV*
	DHB130SD5FF	130	5 1/8	8	× 16	8	× 14	2	38	15.2	CC*, CV*
	DHB135SD5FF	135	5 1/4	8	× 16	8	× 14	2	38	15.4	CC*, CV*
	DHB138SD5FF	138	5 1/2	8	× 16	8	× 14	2	38	15.6	CC*, CV*
	DHB140SD5FF	140	5 1/2	8	× 16	10	× 14	2	38	16.0	CC*, CV*
	DHB146SD5FF	146	5 3/4	8	× 18	8	× 15	2	38	16.5	CC*, CV*
	DHB150SD5FF	150	5 7/8	8	× 18	8	× 15	2	38	16.8	CC*, CV*
	DHB152SD5FF	152	6	8	× 18	8	× 15	2	38	17.0	CC*, CV*
SD5	DHB156SD5FF	156	6 1/8	8	× 18	8	× 16	2	38	17.5	CC*, CV*
	DHB130QL50FF	130	5 1/8	8	× 16	8	× 14	2	38	15.2	CC*, CV*
	DHB135QL50FF	135	5 1/4	8	× 16	8	× 14	2	38	15.4	CC*, CV*
	DHB138QL50FF	138	5 1/2	8	× 16	8	× 14	2	38	15.6	CC*, CV*
	DHB140QL50FF	140	5 1/2	8	× 16	10	× 14	2	38	16.0	CC*, CV*
	DHB146QL50FF	146	5 3/4	8	× 18	8	× 15	2	38	16.5	CC*, CV*
	DHB150QL50FF	150	5 7/8	8	× 18	8	× 15	2	38	16.8	CC*, CV*
	DHB152QL50FF	152	6	8	× 18	8	× 15	2	38	17.0	CC*, CV*
QL50	DHB156QL50FF	156	6 1/8	8	× 18	8	× 16	2	38	17.5	CC*, CV*

*CC: Concave; CV: Convex; FF: Flat face.

DHH65

High air pressure with foot valve

6"

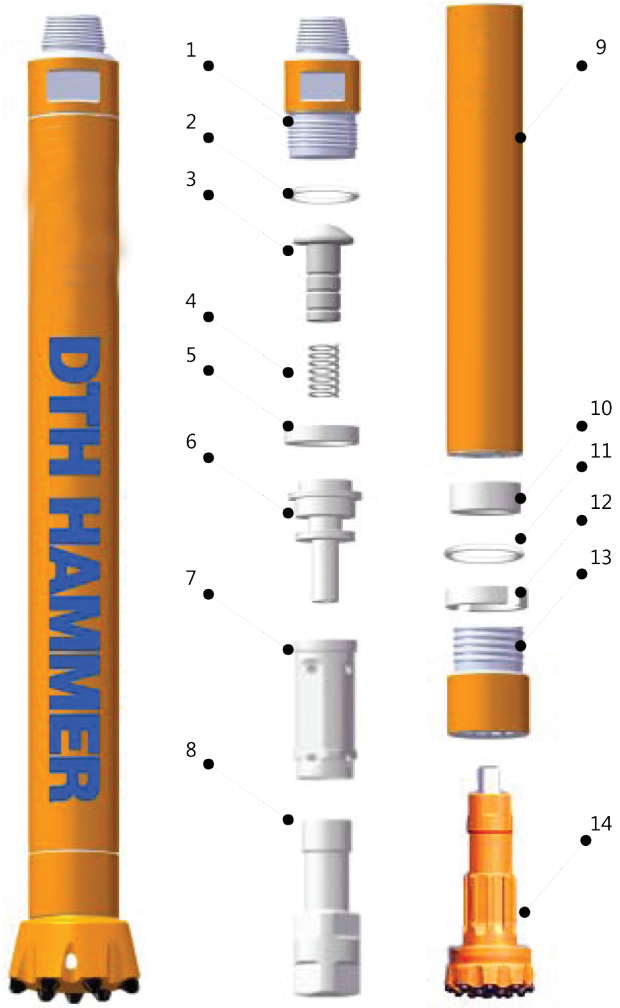

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	20.00	44.09	DHH6501
2	O-ring of top sub	0.02	0.04	DHH6502
3	Check valve	1.00	2.20	DHH6503
4	Spring	0.04	0.09	DHH6504
5	Compression buffer	0.08	0.18	DHH6505
6	Air distributor	5.00	11.02	DHH6506
7	Internal cylinder	5.00	11.02	DHH6507
8	Piston	23.60	52.03	DHH6508
9	External cylinder	36.80	81.13	DHH6509
10	Guided sleeve	2.40	5.29	DHH6510
11	O-ring of stop ring	0.02	0.04	DHH6511
12	Stop ring	0.60	1.32	DHH6512
13	Drive sub	6.00	13.23	DHH6513
14	Drill bit			DHH6514

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
100.00	220.46	142	5.59	1248	49.13	155 - 190	6.10 - 7.48	COP64 DHD360

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
3 1/2" API reg.	1.0 - 2.5	23	20 - 30	600 - 836

DHH65(W)

High air pressure without foot valve

6"

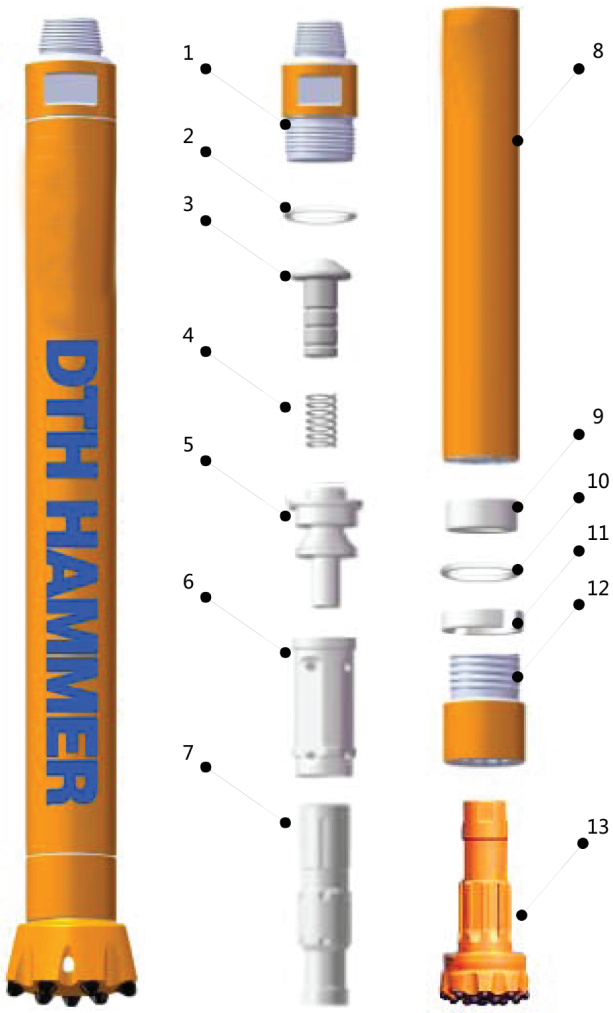

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	21.00	46.30	DHH65W01
2	O-ring of top sub	0.02	0.04	DHH65W02
3	Check valve	0.70	1.54	DHH65W03
4	Spring	0.10	0.22	DHH65W04
5	Air distributor	3.50	7.72	DHH65W05
6	Internal cylinder	4.50	9.92	DHH65W06
7	Piston	24.00	52.91	DHH65W07
8	External cylinder	32.00	70.55	DHH65W08
9	Guided sleeve	7.00	15.43	DHH65W09
10	O-ring of stop ring	0.01	0.02	DHH65W10
11	Stop ring	0.60	1.32	DHH65W11
12	Drive sub	6.50	14.33	DHH65W12
13	Drill bit			DHH65W13

Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
99.00	218.26	148	5.83	1238	48.74	155 - 203	6.10 - 7.99	COP64 DHD360


Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
3 1/2" API reg.	1.0 - 2.5	25	20 - 30	600 - 836

DTH hammer - Valved

DSD6

High air pressure with foot valve

6"

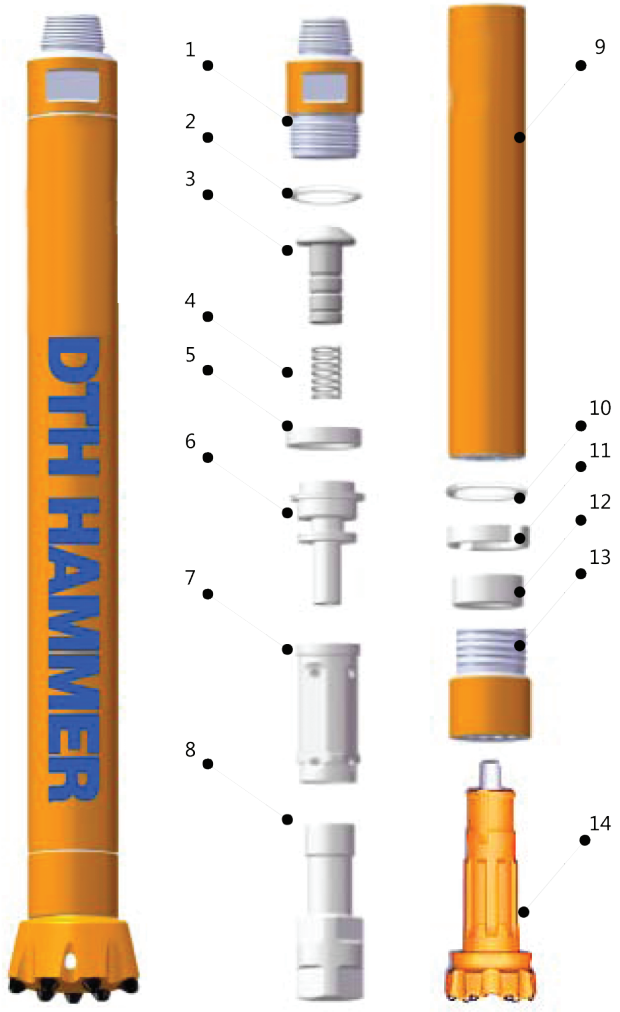

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	20.00	44.09	DSD601
2	O-ring of top sub	0.01	0.02	DSD602
3	Check valve	1.00	2.20	DSD603
4	Spring	0.05	0.11	DSD604
5	Compression buffer	0.10	0.22	DSD605
6	Air distributor	5.00	11.02	DSD606
7	Internal cylinder	5.00	11.02	DSD607
8	Piston	24.00	52.91	DSD608
9	External cylinder	35.00	77.16	DSD609
10	O-ring of stop ring	0.01	0.02	DSD610
11	Stop ring	0.50	1.10	DSD611
12	Guided sleeve	1.50	3.31	DSD612
13	Drive sub	7.50	16.53	DSD613
14	Drill bit			DSD614

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
100.00	220.46	142	5.59	1261	49.65	155 - 190	6.10 - 7.48	SD6

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
3 1/2" API reg.	1.0 - 2.5	23	20 - 30	600 - 836

DSD6(W)

High air pressure without foot valve

6"

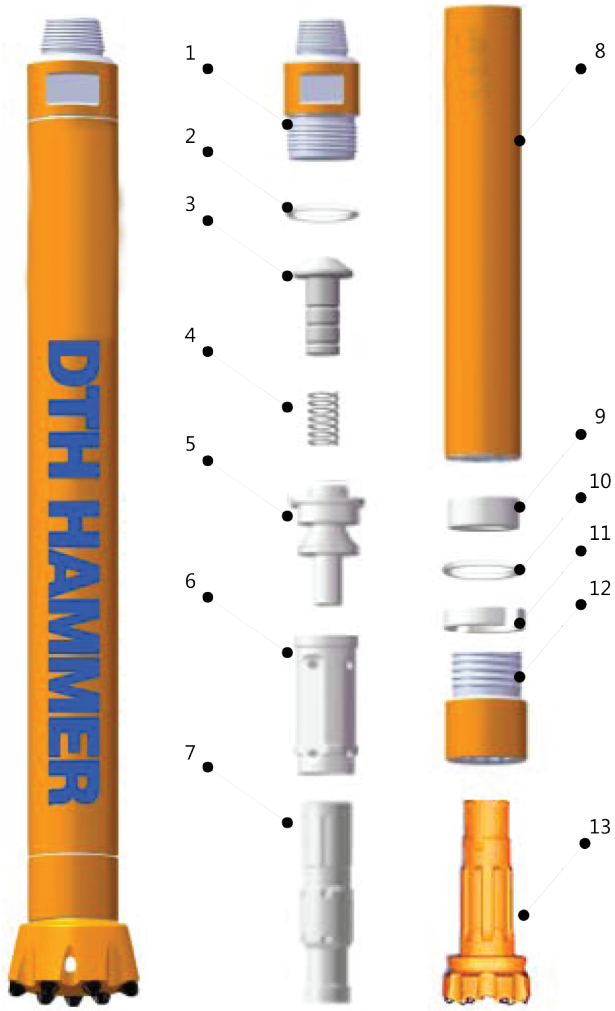

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	21.00	46.30	DSD6W01
2	O-ring of top sub	0.02	0.03	DSD6W02
3	Check valve	0.70	1.54	DSD6W03
4	Spring	0.10	0.22	DSD6W04
5	Air distributor	3.50	7.72	DSD6W05
6	Internal cylinder	4.20	9.26	DSD6W06
7	Piston	24.00	52.91	DSD6W07
8	External cylinder	30.00	66.14	DSD6W08
9	Guided sleeve	2.50	5.51	DSD6W09
10	O-ring of stop ring	0.01	0.02	DSD6W10
11	Stop ring	0.50	1.10	DSD6W11
12	Drive sub	7.50	16.53	DSD6W12
13	Drill bit			DSD6W13

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
94.00	207.23	146	5.75	1182	46.54	155 - 203	6.10 - 7.99	SD6

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
3 1/2" API reg.	1.0 - 2.5	25	20 - 30	600 - 836

DHQ60

High air pressure with foot valve

6"

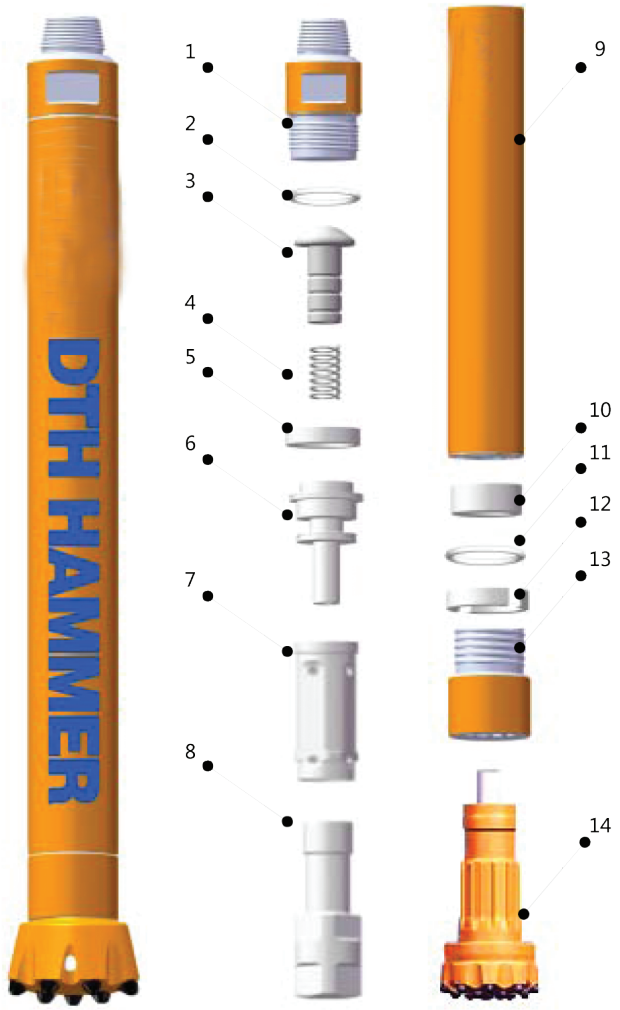

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	20.00	44.09	DHQ6001
2	O-ring of top sub	0.02	0.04	DHQ6002
3	Check valve	1.00	2.20	DHQ6003
4	Spring	0.10	0.22	DHQ6004
5	Compression buffer	0.10	0.22	DHQ6005
6	Air distributor	6.00	13.23	DHQ6006
7	Internal cylinder	5.00	11.02	DHQ6007
8	Piston	23.50	51.81	DHQ6008
9	External cylinder	31.00	68.34	DHQ6009
10	Guided sleeve	1.00	2.20	DHQ6010
11	O-ring of stop ring	0.02	0.04	DHQ6011
12	Stop ring	0.60	1.32	DHQ6012
13	Drive sub	5.40	11.90	DHQ6013
14	Drill bit			DHQ6014

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
95.00	209.44	148	5.83	1212	47.72	155 - 190	6.10 - 7.48	QL60

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
3 1/2" API reg.	1.0 - 2.5	23	20 - 30	600 - 836

DHQ60(W)

High air pressure without foot valve

6"

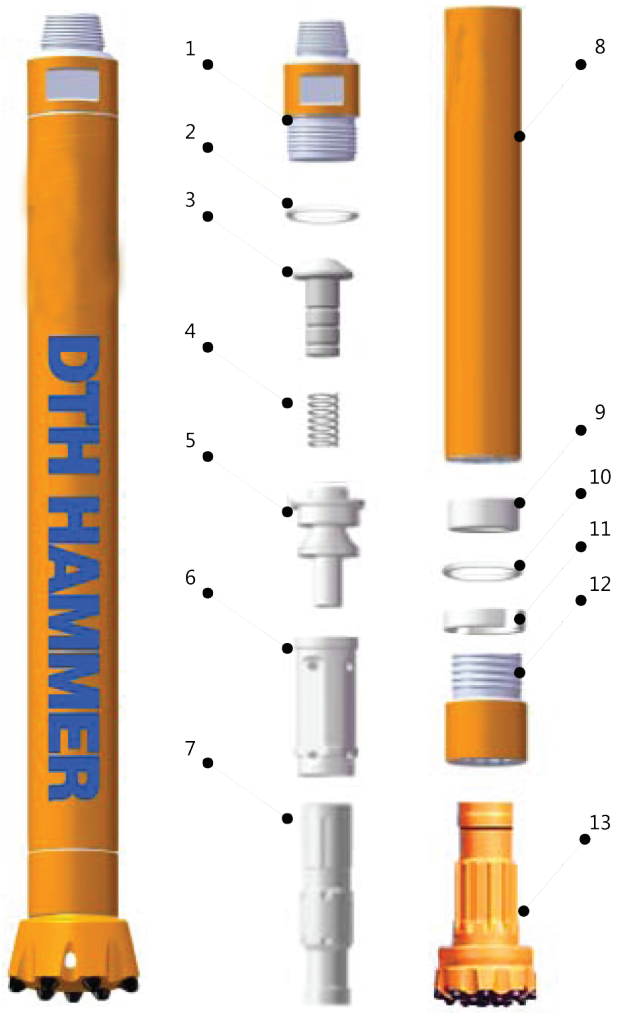

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	21.00	46.30	DHQ60W01
2	O-ring of top sub	0.02	0.03	DHQ60W02
3	Check valve	0.70	1.54	DHQ60W03
4	Spring	0.10	0.22	DHQ60W04
5	Air distributor	4.00	8.82	DHQ60W05
6	Internal cylinder	5.00	11.02	DHQ60W06
7	Piston	24.00	52.91	DHQ60W07
8	External cylinder	30.00	66.14	DHQ60W08
9	Guided sleeve	4.00	8.82	DHQ60W09
10	O-ring of stop ring	0.01	0.02	DHQ60W10
11	Stop ring	0.60	1.32	DHQ60W11
12	Drive sub	7.50	16.53	DHQ60W12
13	Drill bit			DHQ60W13

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
96.50	212.75	148	5.83	1183	46.57	155 - 203	6.10 - 7.99	QL60

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
3 1/2" API reg.	1.0 - 2.5	25	20 - 30	600 - 836

DHM6(W)

High air pressure without foot valve

6"

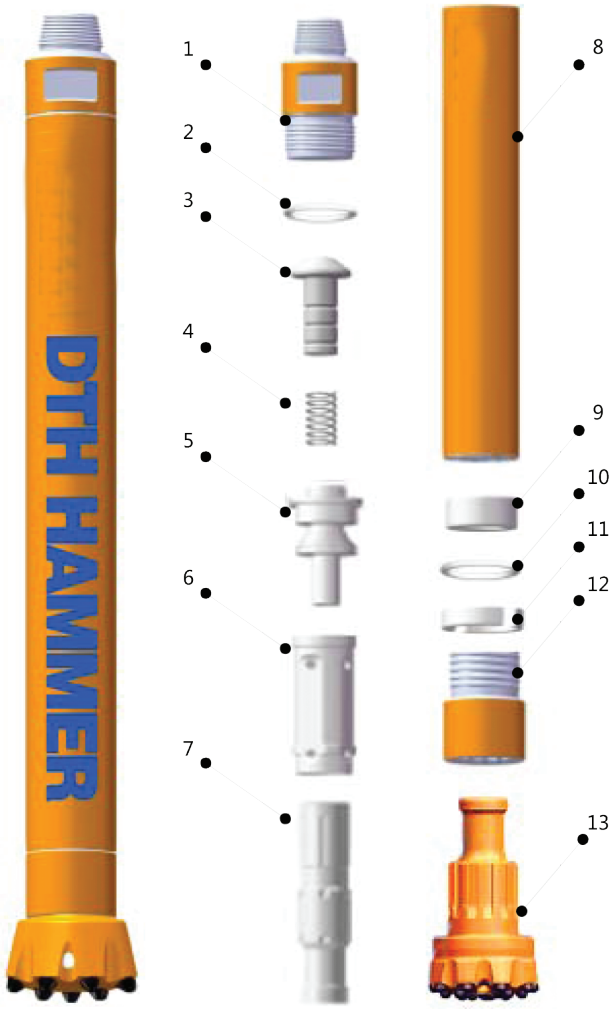

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	21.00	46.30	DHM6W01
2	O-ring of top sub	0.02	0.03	DHM6W02
3	Check valve	0.70	1.54	DHM6W03
4	Spring	0.10	0.22	DHM6W04
5	Air distributor	4.00	8.82	DHM6W05
6	Internal cylinder	4.00	8.82	DHM6W06
7	Piston	24.00	52.91	DHM6W07
8	External cylinder	29.00	63.93	DHM6W08
9	Guided sleeve	5.00	11.02	DHM6W09
10	O-ring of stop ring	0.01	0.02	DHM6W10
11	Stop ring	1.00	2.20	DHM6W11
12	Drive sub	6.00	13.23	DHM6W12
13	Drill bit			DHM6W13

Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
94.00	207.23	146	5.75	1161	45.71	155 - 203	6.10 - 7.99	Mission60A

Connection thread	Working pressure	Impact rate at 2.4 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
3 1/2" API reg.	1.0 - 2.5	25	20 - 30	600 - 836

6"

Button bits	Part No.	D		Buttons				Flushing	Angle	Weight	Available types
		[mm]	[in]	[No.]	[mm]	[No.]	[mm]	[No.]	[°]	[kg]	
	DHB152M60FF	152	6	8	× 18	8	× 16	2	38	22.0	CC*, CV*
	DHB154M60FF	154	6	8	× 18	8	× 16	2	38	22.2	CC*, CV*
	DHB156M60FF	156	6 1/4	8	× 18	8	× 16	2	38	22.5	CC*, CV*
	DHB159M60FF	159	6 1/4	8	× 18	8	× 16	2	38	22.7	CC*, CV*
	DHB165M60FF	165	6 1/2	8	× 18	8	× 16	2	38	23.0	CC*, CV*
	DHB171M60FF	171	6 3/4	8	× 18	8	× 16	2	38	23.5	CC*, CV*
	DHB178M60FF	178	7	8	× 18	10	× 16	2	38	24.0	CC*, CV*
	DHB185M60FF	185	7 1/4	9	× 18	10	× 16	2	38	24.5	CC*, CV*
	DHB190M60FF	190	7 1/2	10	× 18	13	× 16	2	38	25.0	CC*, CV*
M60	DHB203M60FF	203	8	10	× 18	14	× 16	2	38	28.0	CC*, CV*
	DHB152DHH65FF	152	6	8	× 18	8	× 16	2	38	23.0	CC*, CV*
	DHB154DHH65FF	154	6	8	× 18	8	× 16	2	38	23.0	CC*, CV*
	DHB156DHH65FF	156	6 1/4	8	× 18	8	× 16	2	38	23.0	CC*, CV*
	DHB159DHH65FF	159	6 1/4	8	× 18	8	× 16	2	38	23.5	CC*, CV*
	DHB165DHH65FF	165	6 1/2	8	× 18	8	× 16	2	38	24.0	CC*, CV*
	DHB171DHH65FF	171	6 3/4	8	× 18	8	× 16	2	38	25.0	CC*, CV*
	DHB178DHH65FF	178	7	8	× 18	10	× 16	2	38	26.0	CC*, CV*
	DHB185DHH65FF	185	7 1/4	9	× 18	10	× 16	2	38	26.8	CC*, CV*
	DHB190DHH65FF	190	7 1/2	10	× 18	13	× 16	2	38	27.5	CC*, CV*
DHD360R / COP64	DHB203DHH65FF	203	8	10	× 18	14	× 16	2	38	31.0	CC*, CV*
	DHB152SD6FF	152	6	8	× 18	8	× 16	2	38	26.0	CC*, CV*
	DHB154SD6FF	154	6	8	× 18	8	× 16	2	38	26.2	CC*, CV*
	DHB156SD6FF	156	6 1/4	8	× 18	8	× 16	2	38	26.5	CC*, CV*
	DHB159SD6FF	159	6 1/4	8	× 18	8	× 16	2	38	26.7	CC*, CV*
	DHB165SD6FF	165	6 1/2	8	× 18	8	× 16	2	38	27.0	CC*, CV*
	DHB171SD6FF	171	6 3/4	8	× 18	8	× 16	2	38	28.0	CC*, CV*
	DHB178SD6FF	178	7	8	× 18	10	× 16	2	38	29.0	CC*, CV*
	DHB185SD6FF	185	7 1/4	9	× 18	10	× 16	2	38	31.5	CC*, CV*
	DHB190SD6FF	190	7 1/2	10	× 18	13	× 16	2	38	32.0	CC*, CV*
SD6	DHB203SD6FF	203	8	10	× 18	14	× 16	2	38	34.0	CC*, CV*
	DHB152QL60FF	152	6	8	× 18	8	× 16	2	38	24.0	CC*, CV*
	DHB154QL60FF	154	6	8	× 18	8	× 16	2	38	24.2	CC*, CV*
	DHB156QL60FF	156	6 1/4	8	× 18	8	× 16	2	38	24.5	CC*, CV*
	DHB159QL60FF	159	6 1/4	8	× 18	8	× 16	2	38	24.7	CC*, CV*
	DHB165QL60FF	165	6 1/2	8	× 18	8	× 16	2	38	25.0	CC*, CV*
	DHB171QL60FF	171	6 3/4	8	× 18	8	× 16	2	38	26.0	CC*, CV*
	DHB178QL60FF	178	7	8	× 18	10	× 16	2	38	27.0	CC*, CV*
	DHB185QL60FF	185	7 1/4	9	× 18	10	× 16	2	38	28.0	CC*, CV*
	DHB190QL60FF	190	7 1/2	10	× 18	13	× 16	2	38	29.0	CC*, CV*
QL60	DHB203QL60FF	203	8	10	× 18	14	× 16	2	38	33.0	CC*, CV*


*CC: Concave; CV: Convex; FF: Flat face.

DTH hammer - Valveless

DHW7(W)

High air pressure without foot valve

7"

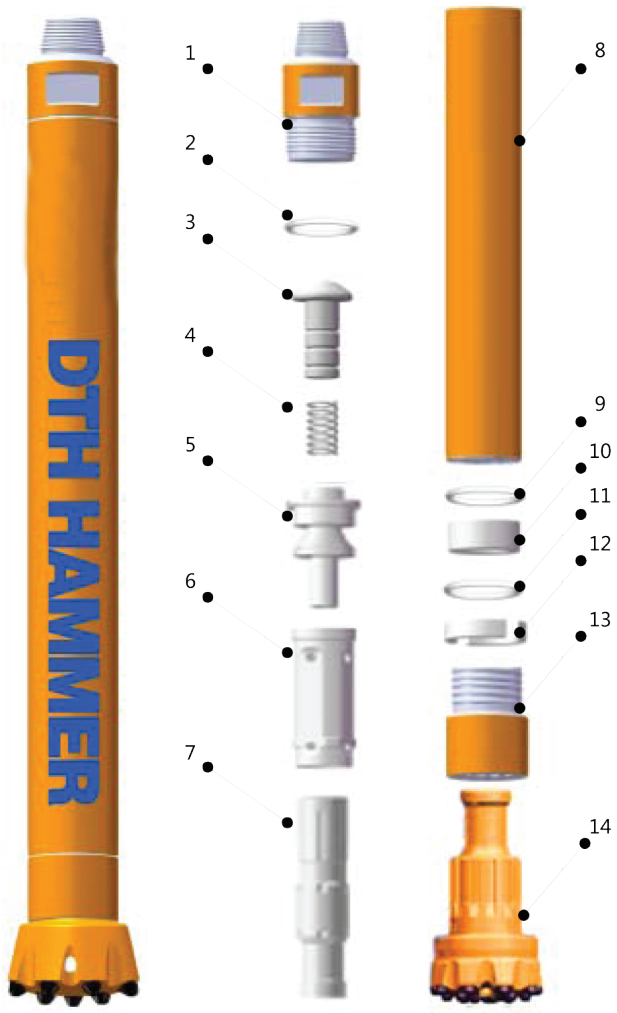

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	25.00	55.12	DHW7W01
2	O-ring of top sub	0.02	0.04	DHW7W02
3	Check valve	0.70	1.54	DHW7W03
4	Spring	0.10	0.22	DHW7W04
5	Air distributor	4.70	10.36	DHW7W05
6	Internal cylinder	5.30	11.68	DHW7W06
7	Piston	33.50	73.85	DHW7W07
8	External cylinder	42.00	92.59	DHW7W08
9	Piston retaining ring	0.30	0.66	DHW7W09
10	Guided sleeve	5.45	12.02	DHW7W10
11	Piston retaining ring	0.10	0.22	DHW7W11
12	Stop ring	1.29	2.84	DHW7W12
13	Drive sub	14.50	31.97	DHW7W13
14	Drill bit			DHW7W14

Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
132.00	291.01	165	6.50	1188	46.77	175 - 216	6.89 - 8.50	HK70A

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
3 1/2" API reg.	1.0 - 2.5	25	20 - 30	836 - 1150

DHH85

8"

High air pressure with foot valve



Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	41.00	90.39	DHH8501
2	O-ring of top sub	0.02	0.04	DHH8502
3	Breakout ring	0.20	0.44	DHH8503
4	Check valve	1.50	3.31	DHH8504
5	Spring	0.50	1.10	DHH8505
6	Compression buffer	0.50	1.10	DHH8506
7	Air distributor	13.00	28.66	DHH8507
8	Internal cylinder	9.00	19.84	DHH8508
9	Piston	42.00	92.59	DHH8509
10	External cylinder	62.00	136.69	DHH8510
11	O-ring of stop ring	0.02	0.04	DHH8511
12	Stop ring	1.20	2.65	DHH8512
13	Drive sub	18.00	39.68	DHH8513
14	Drill bit			DHH8514

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
189.00	416.67	180	7.09	1492	58.74	195 - 254	7.68 - 10.00	COP84 DHD380

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
4 1/2" API reg.	1.0 - 2.5	20	20 - 30	836 - 1150

DHH85(W)

High air pressure without foot valve

8"

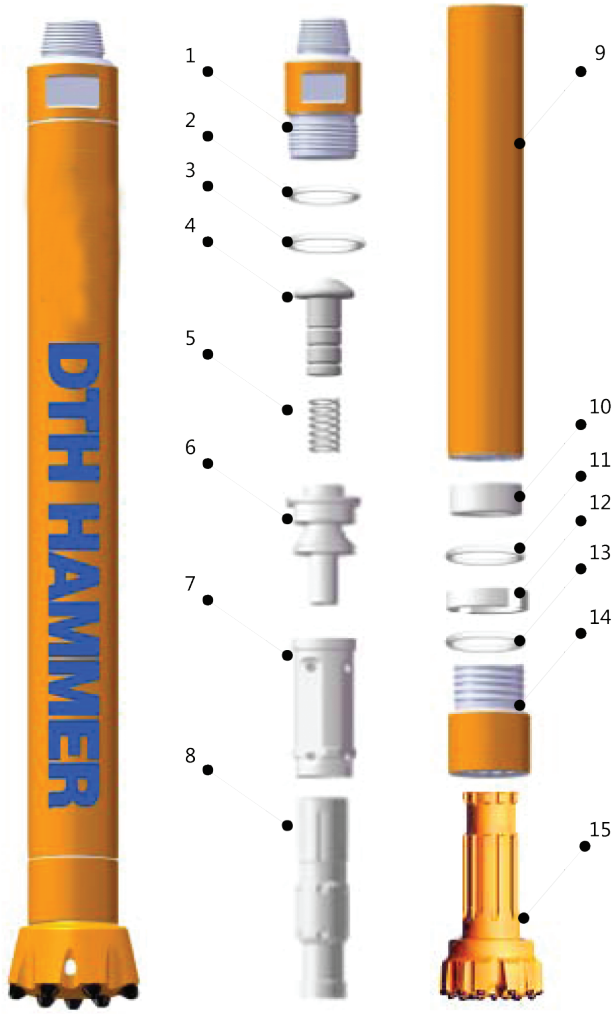

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	36.00	79.37	DHH85W01
2	O-ring of top sub	0.02	0.03	DHH85W02
3	Breakout ring	0.30	0.66	DHH85W03
4	Check valve	2.00	4.41	DHH85W04
5	Spring	0.10	0.22	DHH85W05
6	Air distributor	6.00	13.23	DHH85W06
7	Internal cylinder	6.50	14.33	DHH85W07
8	Piston	42.50	93.70	DHH85W08
9	External cylinder	64.00	141.10	DHH85W09
10	Guided sleeve	6.00	13.23	DHH85W10
11	O-ring of stop ring	0.10	0.22	DHH85W11
12	Stop ring	2.00	4.41	DHH85W12
13	Breakout ring	0.30	0.66	DHH85W13
14	Drive sub	20.00	44.09	DHH85W14
15	Drill bit			DHH85W15

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
185.00	407.86	185	7.28	1359	53.50	195 - 254	7.68 - 10.00	COP84 DHD380

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
4 1/2" API reg.	1.0 - 2.5	22	15 - 25	836 - 1150

DSD8

High air pressure with foot valve

8"

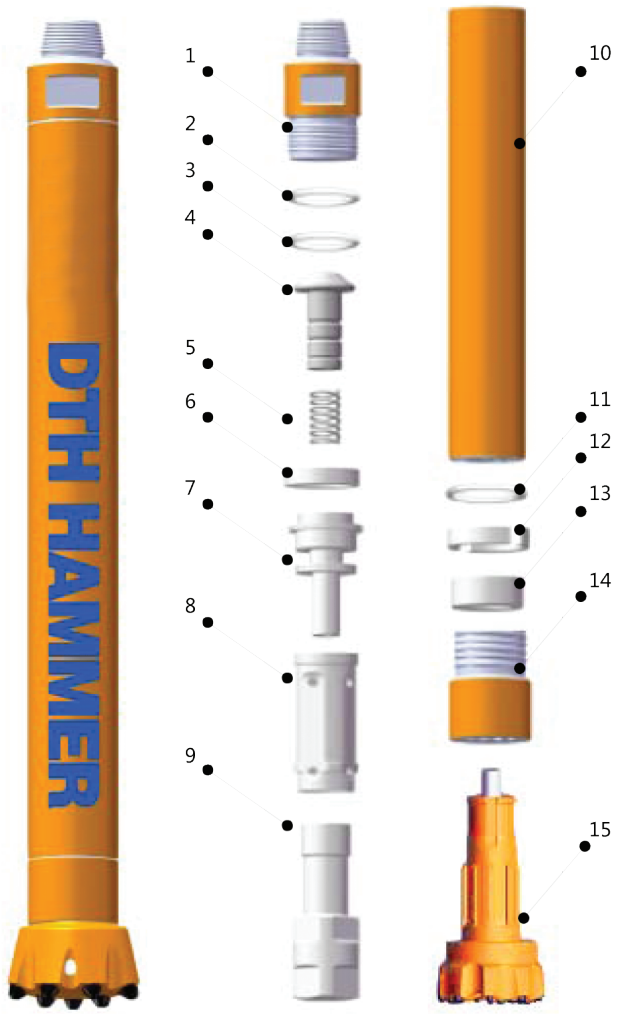

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	41.00	90.39	DSD801
2	O-ring of top sub	0.02	0.04	DSD802
3	Breakout ring	0.20	0.44	DSD803
4	Check valve	1.50	3.31	DSD804
5	Spring	0.10	0.22	DSD805
6	Compression buffer	0.42	0.93	DSD806
7	Air distributor	12.50	27.56	DSD807
8	Internal cylinder	8.60	18.96	DSD808
9	Piston	42.00	92.59	DSD809
10	External cylinder	65.00	143.30	DSD810
11	O-ring of stop ring	0.05	0.11	DSD811
12	Stop ring	1.20	2.65	DSD812
13	Guided sleeve	3.40	7.50	DSD813
14	Drive sub	16.00	35.27	DSD814
15	Drill bit			DSD815

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
192.00	423.29	180	7.09	1463	57.60	195 - 254	7.68 - 10.00	SD8

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
4 1/2" API reg.	1.0 - 2.5	20	15 - 25	836 - 1150

DSD8(W)

High air pressure without foot valve

8"

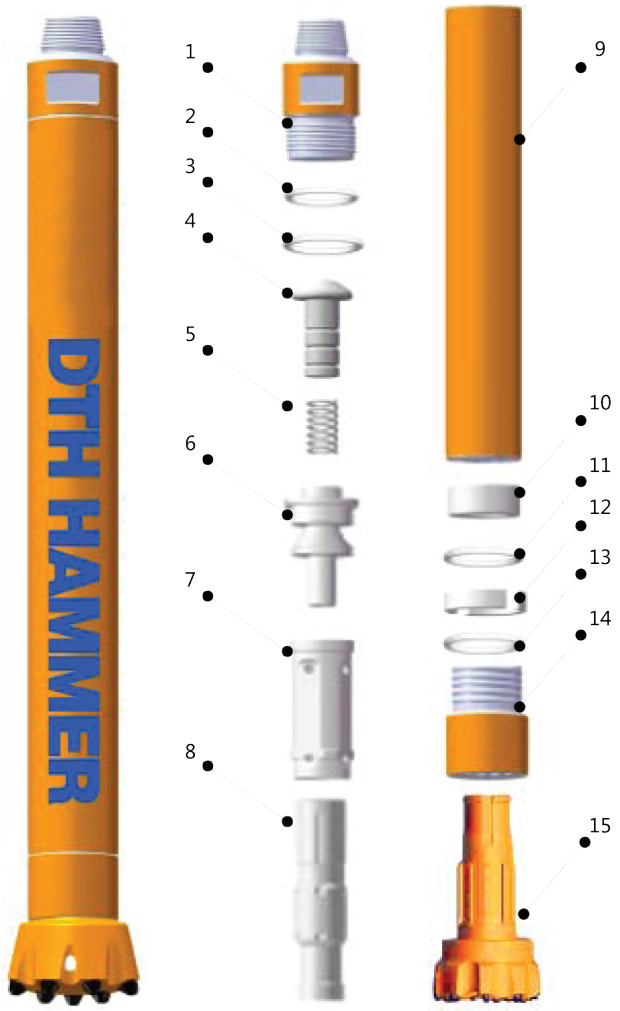

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	34.00	74.96	DSD8W01
2	O-ring of top sub	0.02	0.03	DSD8W02
3	Breakout ring	0.30	0.66	DSD8W03
4	Check valve	1.20	2.65	DSD8W04
5	Spring	0.10	0.22	DSD8W05
6	Air distributor	6.00	13.23	DSD8W06
7	Internal cylinder	6.50	14.33	DSD8W07
8	Piston	42.50	93.70	DSD8W08
9	External cylinder	59.00	130.07	DSD8W09
10	Guided sleeve	6.00	13.23	DSD8W10
11	O-ring of stop ring	0.01	0.02	DSD8W11
12	Stop ring	1.20	2.65	DSD8W12
13	Breakout ring	0.30	0.66	DSD8W13
14	Drive sub	16.00	35.27	DSD8W14
15	Drill bit			DSD8W15

Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
174.00	383.60	180	7.09	1330	52.36	195 - 254	7.68 - 10.00	SD8


Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
4 1/2" API reg.	1.0 - 2.5	22	15 - 25	836 - 1150

DTH hammer - Valved

DHQ80

High air pressure with foot valve

8"

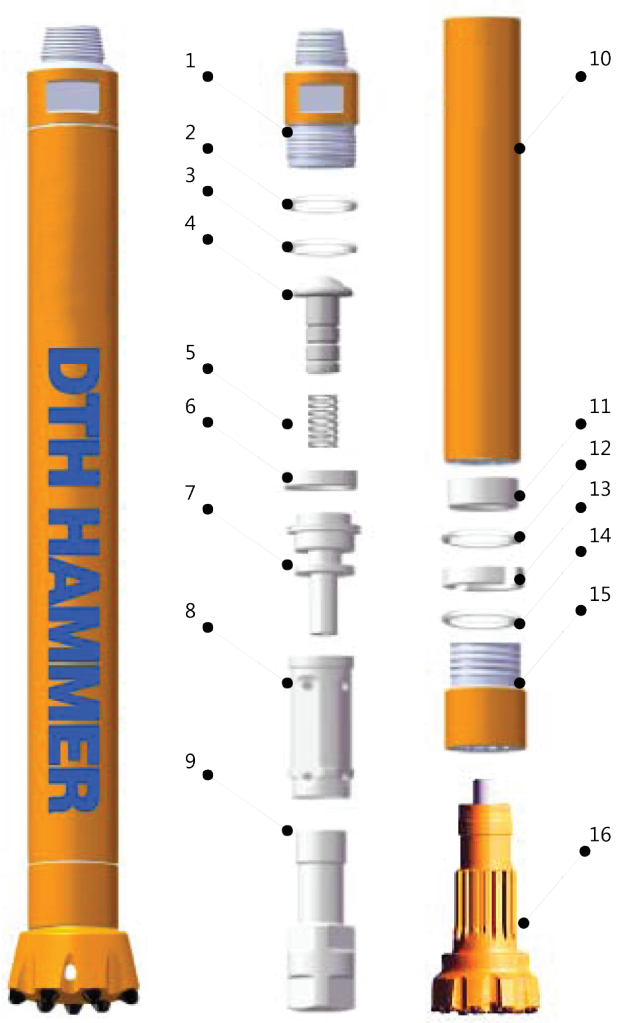

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	41.00	90.39	DHQ8001
2	O-ring of top sub	0.02	0.04	DHQ8002
3	Breakout ring	0.30	0.66	DHQ8003
4	Check valve	1.50	3.31	DHQ8004
5	Spring	0.10	0.22	DHQ8005
6	Compression buffer	0.42	0.93	DHQ8006
7	Air distributor	13.00	28.66	DHQ8007
8	Internal cylinder	8.60	18.96	DHQ8008
9	Piston	41.00	90.39	DHQ8009
10	External cylinder	60.00	132.28	DHQ8010
11	Guided sleeve	2.20	4.85	DHQ8011
12	O-ring of stop ring	0.02	0.04	DHQ8012
13	Stop ring	1.20	2.65	DHQ8013
14	Breakout ring	0.30	0.66	DHQ8014
15	Drive sub	12.00	26.46	DHQ8015
16	Drill bit			DHQ8016

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
182.00	401.24	185	7.28	1465	57.68	195 - 254	7.68 - 10.00	QL80

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
4 1/2" API reg.	1.0 - 2.5	20	15 - 25	836 - 1150

DHQ80(W)

8"

High air pressure without foot valve

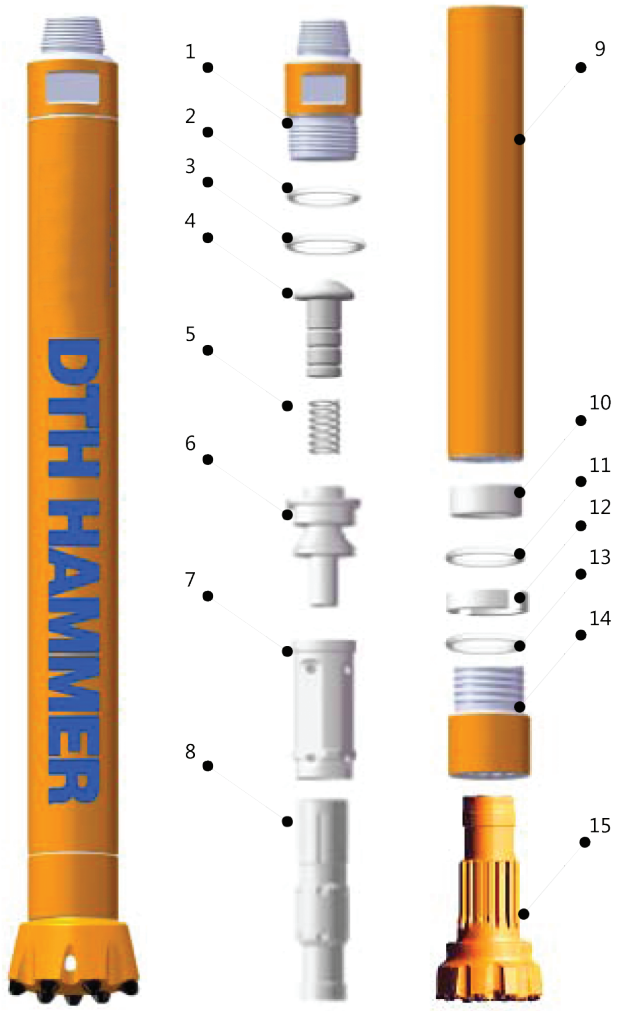

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	34.00	74.96	DHQ80W01
2	O-ring of top sub	0.02	0.03	DHQ80W02
3	Breakout ring	0.30	0.66	DHQ80W03
4	Check valve	1.20	2.65	DHQ80W04
5	Spring	0.10	0.22	DHQ80W05
6	Air distributor	6.00	13.23	DHQ80W06
7	Internal cylinder	6.50	14.33	DHQ80W07
8	Piston	43.00	94.80	DHQ80W08
9	External cylinder	60.00	132.28	DHQ80W09
10	Guided sleeve	7.00	15.43	DHQ80W10
11	O-ring of stop ring	0.01	0.02	DHQ80W11
12	Stop ring	1.40	3.09	DHQ80W12
13	Breakout ring	0.30	0.66	DHQ80W13
14	Drive sub	14.00	30.86	DHQ80W14
15	Drill bit			DHQ80W15

Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
174.00	383.60	185	7.28	1330	52.36	195 - 254	7.68 - 10.00	QL80

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
4 1/2" API reg.	1.0 - 2.5	22	15 - 25	836 - 1150

DTH drill bits

8"


Button bits	Part No.	D		Buttons				Flushing	Angle	Weight	Available types
		[mm]	[in]	[No.]	[mm]	[No.]	[mm]	[No.]	[°]	[kg]	
	DHB200M80FF	200	7 7/8	10	× 18	14	× 18	2	38	45.0	CC*, CV*
	DHB203M80FF	203	8	10	× 18	14	× 18	2	38	46.0	CC*, CV*
	DHB216M80FF	216	8 1/2	10	× 18	14	× 18	2	38	54.0	CC*, CV*
	DHB225M80FF	225	8 7/8	10	× 18	15	× 18	2	38	57.0	CC*, CV*
	DHB229M80FF	229	9	10	× 18	15	× 18	2	38	58.0	CC*, CV*
	DHB235M80FF	235	9 1/4	12	× 18	20	× 16	2	38	58.5	CC*, CV*
	DHB240M80FF	240	9 1/2	12	× 18	20	× 16	2	38	59.0	CC*, CV*
	DHB254M80FF	254	10	12	× 18	26	× 16	2	38	62.0	CC*, CV*
	DHB270M80FF	270	10 5/8	12	× 19	28	× 16	2	38	67.0	CC*, CV*
M80	DHB279M80FF	279	11	12	× 19	28	× 16	2	38	72.0	CC*, CV*
	DHB200DHH85FF	200	7 7/8	10	× 18	14	× 18	2	38	46.0	CC*, CV*
	DHB203DHH85FF	203	8	10	× 18	14	× 18	2	38	47.0	CC*, CV*
	DHB216DHH85FF	216	8 1/2	10	× 18	14	× 18	2	38	53.0	CC*, CV*
	DHB225DHH85FF	225	8 7/8	10	× 18	15	× 18	2	38	56.0	CC*, CV*
	DHB229DHH85FF	229	9	10	× 18	15	× 18	2	38	57.0	CC*, CV*
	DHB235DHH85FF	235	9 1/4	12	× 18	20	× 16	2	38	57.5	CC*, CV*
	DHB240DHH85FF	240	9 1/2	12	× 18	20	× 16	2	38	58.0	CC*, CV*
	DHB254DHH85FF	254	10	12	× 18	26	× 16	2	38	61.0	CC*, CV*
	DHB270DHH85FF	270	10 5/8	12	× 19	28	× 16	2	38	66.0	CC*, CV*
DHD380 / COP84	DHB279DHH85FF	279	11	12	× 19	28	× 16	2	38	71.0	CC*, CV*
	DHB200SD8FF	200	7 7/8	10	× 18	14	× 18	2	38	45.0	CC*, CV*
	DHB203SD8FF	203	8	10	× 18	14	× 18	2	38	45.5	CC*, CV*
	DHB216SD8FF	216	8 1/2	10	× 18	14	× 18	2	38	13.0	CC*, CV*
	DHB225SD8FF	225	8 7/8	10	× 18	15	× 18	2	38	56.0	CC*, CV*
	DHB229SD8FF	229	9	10	× 18	15	× 18	2	38	57.5	CC*, CV*
	DHB235SD8FF	235	9 1/4	12	× 18	20	× 16	2	38	59.0	CC*, CV*
	DHB240SD8FF	240	9 1/2	12	× 18	20	× 16	2	38	60.0	CC*, CV*
	DHB254SD8FF	254	10	12	× 18	26	× 16	2	38	61.0	CC*, CV*
	DHB270SD8FF	270	10 5/8	12	× 19	28	× 16	2	38	68.0	CC*, CV*
SD8	DHB279SD8FF	279	11	12	× 19	28	× 16	2	38	74.0	CC*, CV*
	DHB200QL80FF	200	7 7/8	10	× 18	14	× 18	2	38	45.0	CC*, CV*
	DHB203QL80FF	203	8	10	× 18	14	× 18	2	38	46.0	CC*, CV*
	DHB216QL80FF	216	8 1/2	10	× 18	14	× 18	2	38	54.0	CC*, CV*
	DHB225QL80FF	225	8 7/8	10	× 18	15	× 18	2	38	57.0	CC*, CV*
	DHB229QL80FF	229	9	10	× 18	15	× 18	2	38	58.0	CC*, CV*
	DHB235QL80FF	235	9 1/4	12	× 18	20	× 16	2	38	58.5	CC*, CV*
	DHB240QL80FF	240	9 1/2	12	× 18	20	× 16	2	38	59.0	CC*, CV*
	DHB254QL80FF	254	10	12	× 18	26	× 16	2	38	62.0	CC*, CV*
	DHB270QL80FF	270	10 5/8	12	× 19	28	× 16	2	38	67.0	CC*, CV*
QL80	DHB279QL80FF	279	11	12	× 19	28	× 16	2	38	72.0	CC*, CV*

*CC: Concave; CV: Convex; FF: Flat face.

DHQ95(W)

High air pressure without foot valve

9"

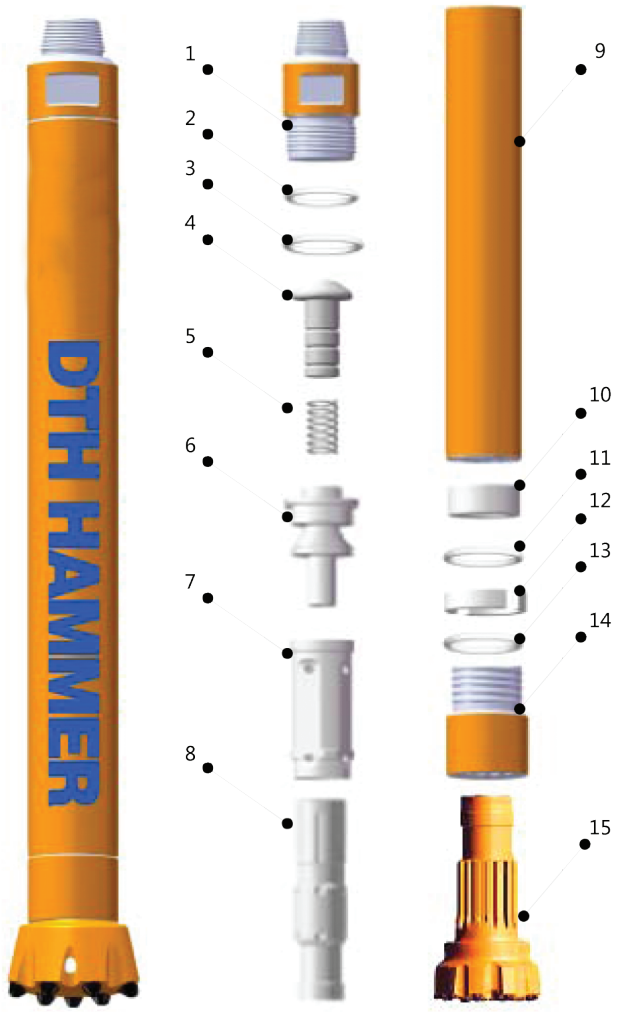

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	38.00	83.78	DHQ95W01
2	O-ring of top sub	0.01	0.02	DHQ95W02
3	Breakout ring	0.40	0.88	DHQ95W03
4	Check valve	1.20	2.65	DHQ95W04
5	Spring	0.10	0.22	DHQ95W05
6	Air distributor	7.00	15.43	DHQ95W06
7	Internal cylinder	7.50	16.53	DHQ95W07
8	Piston	50.00	110.23	DHQ95W08
9	External cylinder	75.00	165.35	DHQ95W09
10	Guided sleeve	12.00	26.46	DHQ95W10
11	O-ring of stop ring	0.01	0.02	DHQ95W11
12	Stop ring	2.50	5.51	DHQ95W12
13	Breakout ring	0.40	0.88	DHQ95W13
14	Drive sub	21.00	46.30	DHQ95W14
15	Drill bit			DHQ95W15

Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
215.00	473.99	203	7.99	1340	52.76	216 -254	8.50 - 10.00	QL80


Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
4 1/2" API reg.	1.0 - 2.5	22	15 - 25	836 - 1150

DTH hammer - Valved

DSD10

High air pressure with foot valve

10"

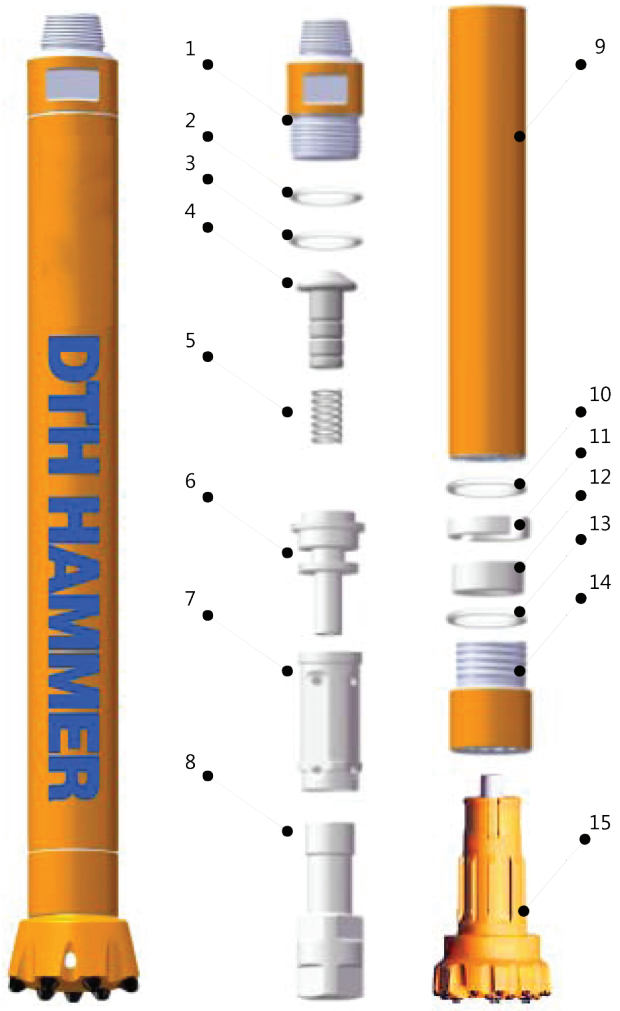

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	59.00	130.07	DSD1001
2	O-ring of top sub	0.03	0.07	DSD1002
3	Breakout ring	0.30	0.66	DSD1003
4	Check valve	1.40	3.09	DSD1004
5	Spring	0.30	0.66	DSD1005
6	Air distributor	11.50	25.35	DSD1006
7	Internal cylinder	11.00	24.25	DSD1007
8	Piston	62.00	136.69	DSD1008
9	External cylinder	110.00	242.51	DSD1009
10	O-ring of stop ring	0.03	0.07	DSD1010
11	Stop ring	1.60	3.53	DSD1011
12	Guided sleeve	4.50	9.92	DSD1012
13	Breakout ring	0.30	0.66	DSD1013
14	Drive sub	24.00	52.91	DSD1014
15	Drill bit			DSD1015

Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
290.00	639.34	225	8.86	1502	59.13	254 - 311	10.00 - 12.24	SD10


Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
4 1/2" API reg. 5 1/2" API reg.	1.0 - 2.5	18	15 - 25	836 - 1150

DTH hammer - Valveless

DSD10(W)

High air pressure without foot valve

10"

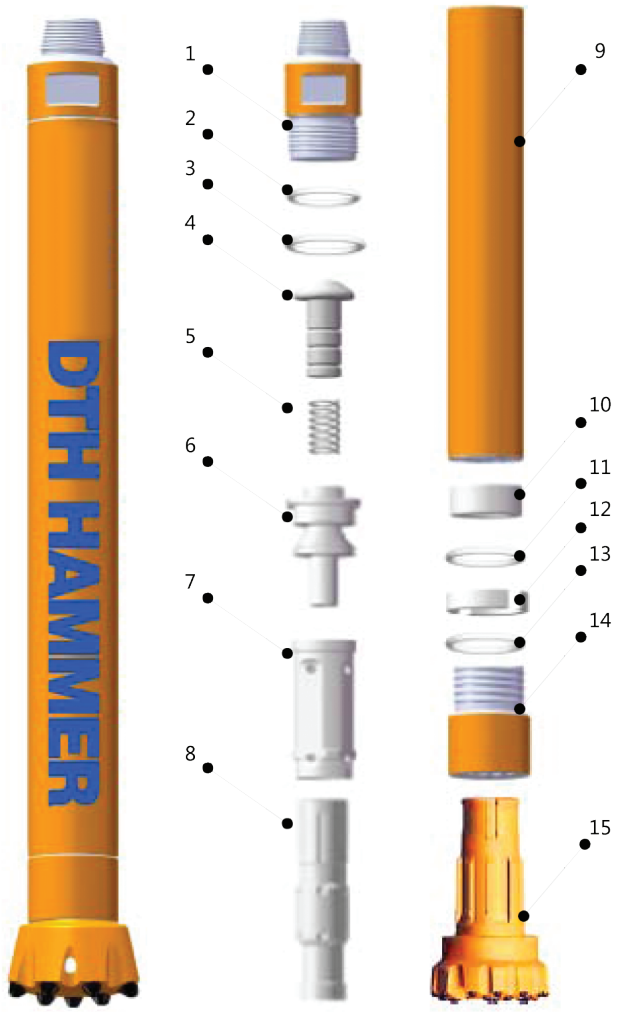

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	59.00	130.07	DSD10W01
2	O-ring of top sub	0.03	0.07	DSD10W02
3	Breakout ring	0.50	1.10	DSD10W03
4	Check valve	1.40	3.09	DSD10W04
5	Spring	0.30	0.66	DSD10W05
6	Air distributor	10.50	23.15	DSD10W06
7	Internal cylinder	12.50	27.56	DSD10W07
8	Piston	77.00	169.76	DSD10W08
9	External cylinder	110.00	242.51	DSD10W09
10	Guided sleeve	11.50	25.35	DSD10W10
11	O-ring of stop ring	0.01	0.02	DSD10W11
12	Stop ring	1.50	3.31	DSD10W12
13	Breakout ring	0.50	1.10	DSD10W13
14	Drive sub	31.50	69.45	DSD10W14
15	Drill bit			DSD10W15

Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
293.00	645.95	226	8.90	1525	60.04	254 - 311	10.00 - 12.24	SD10


Connection thread	Working pressure	Impact rate at 2.4 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
6 5/8" API reg.	1.0 - 2.5	20	15 - 25	836 - 1150

DTH hammer - Valved

DHN100

High air pressure with foot valve

10"

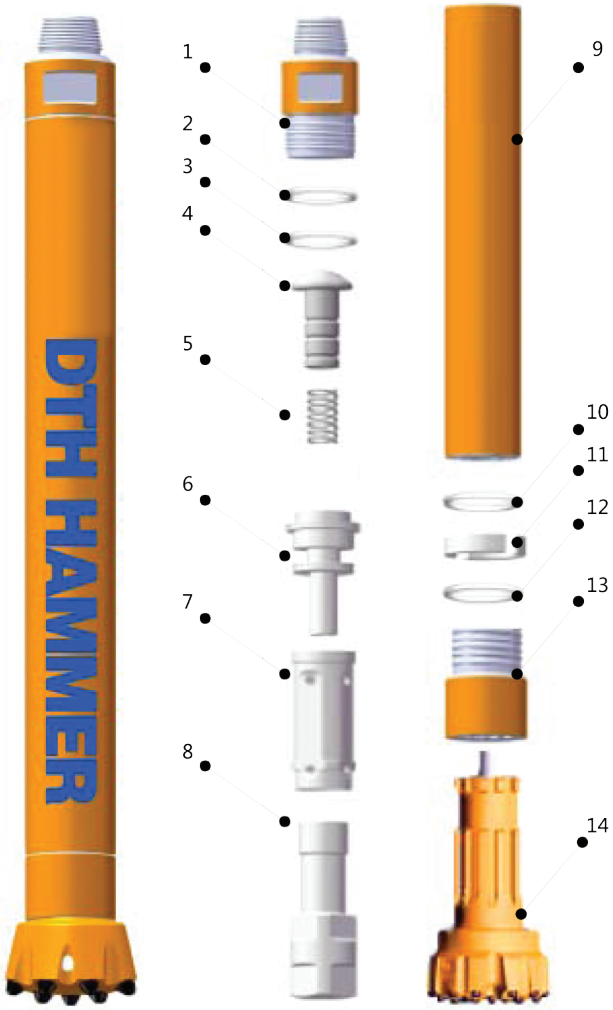

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	59.00	130.07	DHN10001
2	O-ring of top sub	0.03	0.07	DHN10002
3	Breakout ring	0.40	0.88	DHN10003
4	Check valve	1.60	3.53	DHN10004
5	Spring	0.30	0.66	DHN10005
6	Air distributor	11.50	25.35	DHN10006
7	Internal cylinder	11.00	24.25	DHN10007
8	Piston	62.00	136.69	DHN10008
9	External cylinder	112.00	246.92	DHN10009
10	O-ring of stop ring	0.03	0.07	DHN10010
11	Stop ring	1.50	3.31	DHN10011
12	Breakout ring	0.40	0.88	DHN10012
13	Drive sub	26.00	57.32	DHN10013
14	Drill bit			DHN10014

Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
288.00	634.93	226	8.90	1510	59.45	254 - 311	10.00 - 12.24	NUMA100


Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
6 5/8" API reg.	1.0 - 2.5	18	15 - 25	836 - 1150

DTH hammer - Valveless

DHN100(W)

High air pressure without foot valve

10"

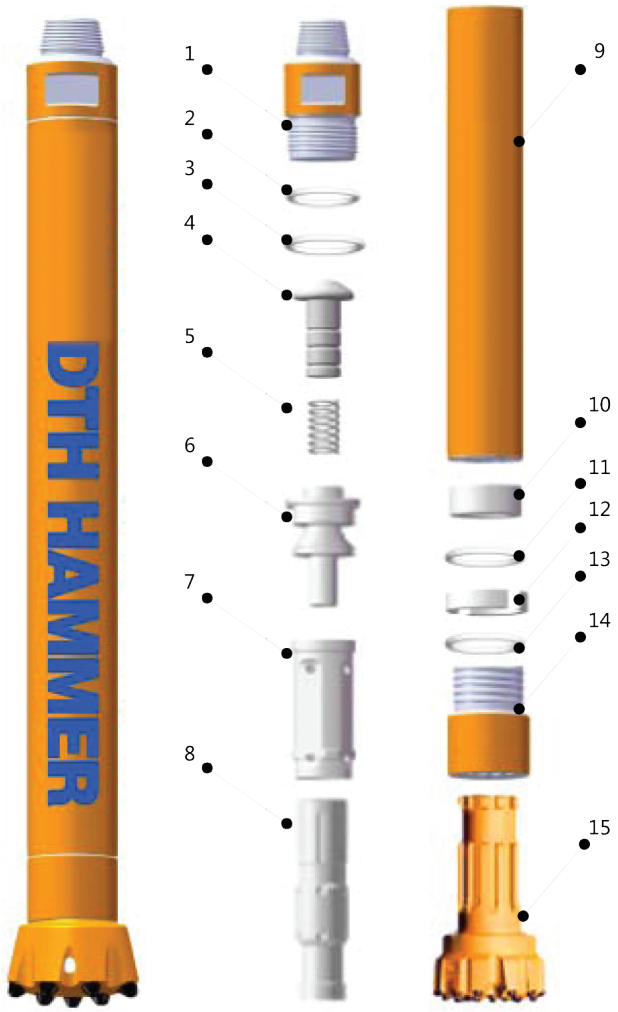

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	59.00	130.07	DHN100W01
2	O-ring of top sub	0.03	0.07	DHN100W02
3	Breakout ring	0.50	1.10	DHN100W03
4	Check valve	1.40	3.09	DHN100W04
5	Spring	0.30	0.66	DHN100W05
6	Air distributor	10.50	23.15	DHN100W06
7	Internal cylinder	12.50	27.56	DHN100W07
8	Piston	77.00	169.76	DHN100W08
9	External cylinder	110.00	242.51	DHN100W09
10	Guided sleeve	4.50	9.92	DHN100W10
11	O-ring of stop ring	0.02	0.04	DHN100W11
12	Stop ring	1.90	4.19	DHN100W12
13	Breakout ring	0.50	1.10	DHN100W13
14	Drive sub	25.50	56.22	DHN100W14
15	Drill bit			DHN100W15

Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
305.00	672.41	226	8.90	1545	60.83	254 - 311	10.00 - 12.24	NUMA100

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
4 1/2" API reg. 5 1/2" API reg.	1.0 - 2.5	20	15 - 25	836 - 1150

DTH drill bits

10"

Button bits	Part No.	D		Buttons				Flushing	Angle	Weight	Available types
		[mm]	[in]	[No.]	[mm]	[No.]	[mm]	[No.]	[°]	[kg]	
	DHB254SD10FF	254	10	12	× 18	20	× 16	2	38	85.0	CC*, CV*
	DHB270SD10FF	270	10 5/8	12	× 19	28	× 18	2	38	88.0	CC*, CV*
	DHB279SD10FF	279	11	12	× 19	28	× 18	2	38	91.0	CC*, CV*
	DHB295SD10FF	295	11 5/8	12	× 19	29	× 18	2	38	95.0	CC*, CV*
	DHB305SD10FF	305	12	15	× 19	36	× 18	2	38	97.0	CC*, CV*
	DHB311SD10FF	311	12 1/4	15	× 19	36	× 18	2	38	99.0	CC*, CV*
	DHB315SD10FF	315	12 3/8	15	× 19	36	× 18	2	38	102.0	CC*, CV*
SD10	DHB330SD10FF	330	13	15	× 19	36	× 18	2	38	114.0	CC*, CV*
	DHB254N100FF	254	10	12	× 18	20	× 16	2	38	86.0	CC*, CV*
	DHB270N100FF	270	10 5/8	12	× 19	28	× 18	2	38	89.0	CC*, CV*
	DHB279N100FF	279	11	12	× 19	28	× 18	2	38	92.0	CC*, CV*
	DHB295N100FF	295	11 5/8	12	× 19	29	× 18	2	38	96.0	CC*, CV*
	DHB305N100FF	305	12	15	× 19	36	× 18	2	38	98.0	CC*, CV*
	DHB311N100FF	311	12 1/4	15	× 19	36	× 18	2	38	100.0	CC*, CV*
	DHB315N100FF	315	12 3/8	15	× 19	36	× 18	2	38	103.0	CC*, CV*
NUMA100	DHB330N100FF	330	13	15	× 19	36	× 18	2	38	115.0	CC*, CV*


*CC: Concave; CV: Convex; FF: Flat face.

DTH hammer - Valved

DSD12

High air pressure with foot valve

12"

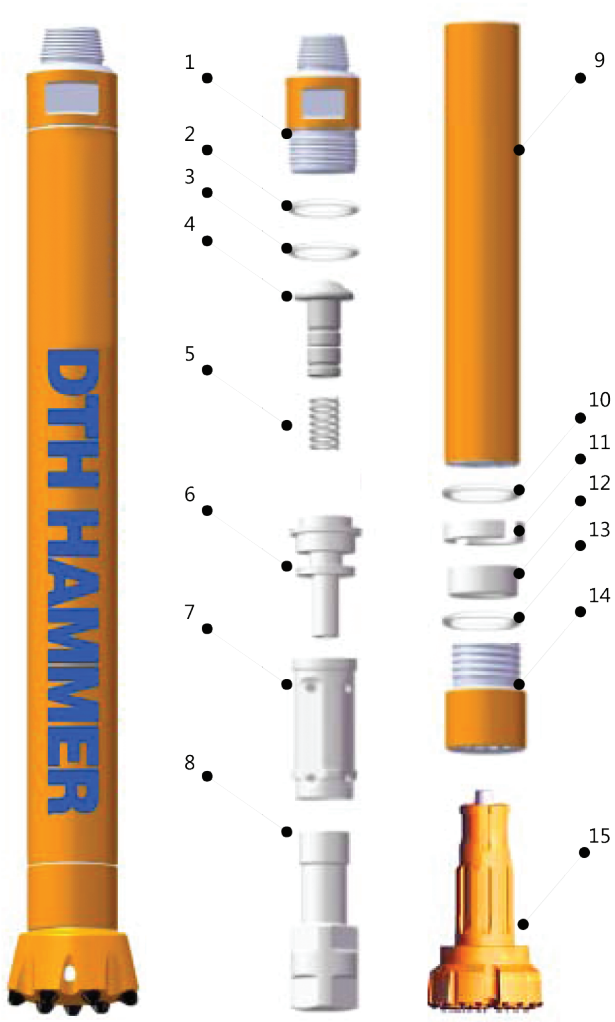

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	70.00	154.32	DSD1201
2	O-ring of top sub	0.04	0.09	DSD1202
3	Breakout ring	0.80	1.76	DSD1203
4	Check valve	3.00	6.61	DSD1204
5	Spring	0.10	0.22	DSD1205
6	Air distributor	20.00	44.09	DSD1206
7	Internal cylinder	23.00	50.71	DSD1207
8	Piston	125.00	275.58	DSD1208
9	External cylinder	170.00	374.79	DSD1209
10	O-ring of stop ring	0.04	0.09	DSD1210
11	Stop ring	4.80	10.58	DSD1211
12	Guided sleeve	18.00	39.68	DSD1212
13	Breakout ring	0.80	1.76	DSD1213
14	Drive sub	51.00	112.44	DSD1214
15	Drill bit			DSD1215

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
530.00	1168.45	275	10.83	1880	74.02	305 - 445	12.01 - 17.52	SD12

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
6 5/8" API reg.	1.0 - 2.5	16	15 - 25	836 - 1150

DSD12(W)

High air pressure without foot valve

12"

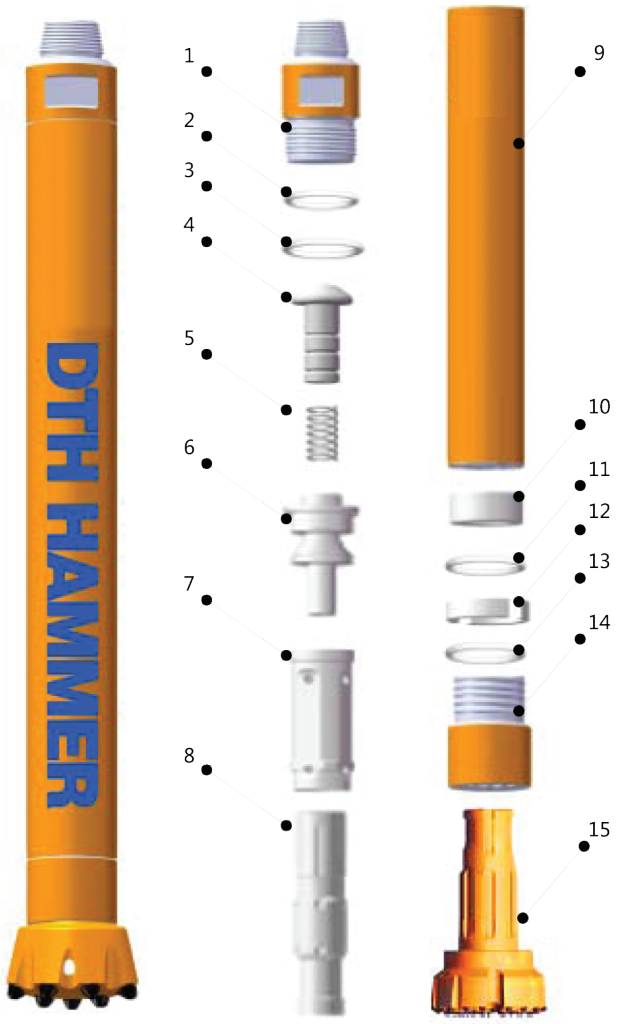

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	110.00	242.51	DSD12W01
2	O-ring of top sub	0.05	0.11	DSD12W02
3	Breakout ring	1.00	2.20	DSD12W03
4	Check valve	2.00	4.41	DSD12W04
5	Spring	0.10	0.22	DSD12W05
6	Air distributor	20.00	44.09	DSD12W06
7	Internal cylinder	25.00	55.12	DSD12W07
8	Piston	115.00	253.53	DSD12W08
9	External cylinder	175.00	385.81	DSD12W09
10	Guided sleeve	25.00	55.12	DSD12W10
11	O-ring of stop ring	0.01	0.02	DSD12W11
12	Stop ring	6.00	13.23	DSD12W12
13	Breakout ring	1.00	2.20	DSD12W13
14	Drive sub	50.00	110.23	DSD12W14
15	Drill bit			DSD12W15

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
530.00	1168.45	275	10.83	1860	73.23	305 - 445	12.01 - 17.52	SD12

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
6 5/8" API reg.	1.0 - 2.5	20	15 - 25	836 - 1150

DHH120(W)

High air pressure without foot valve

12"

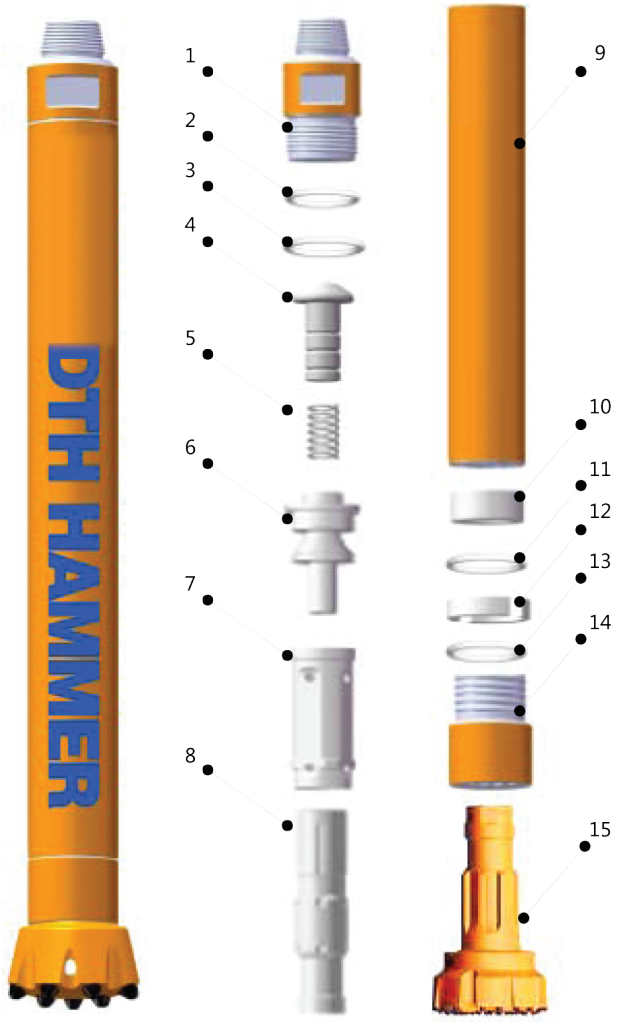

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	70.00	154.32	DHH120W01
2	O-ring of top sub	0.04	0.09	DHH120W02
3	Breakout ring	0.80	1.76	DHH120W03
4	Check valve	2.00	4.41	DHH120W04
5	Spring	0.10	0.22	DHH120W05
6	Air distributor	16.00	35.27	DHH120W06
7	Internal cylinder	25.00	55.12	DHH120W07
8	Piston	113.00	249.12	DHH120W08
9	External cylinder	173.00	381.40	DHH120W09
10	Guided sleeve	24.00	52.91	DHH120W10
11	O-ring of stop ring	0.01	0.02	DHH120W11
12	Stop ring	4.00	8.82	DHH120W12
13	Breakout ring	0.80	1.76	DHH120W13
14	Drive sub	46.00	101.41	DHH120W14
15	Drill bit			DHH120W15

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
474.00	1044.99	275	10.83	1880	74.02	305 - 445	12.01 - 17.52	DHD1120

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
6 5/8" API reg.	1.0 - 2.5	20	15 - 25	836 - 1150

DHN125(W)

High air pressure without foot valve

12"

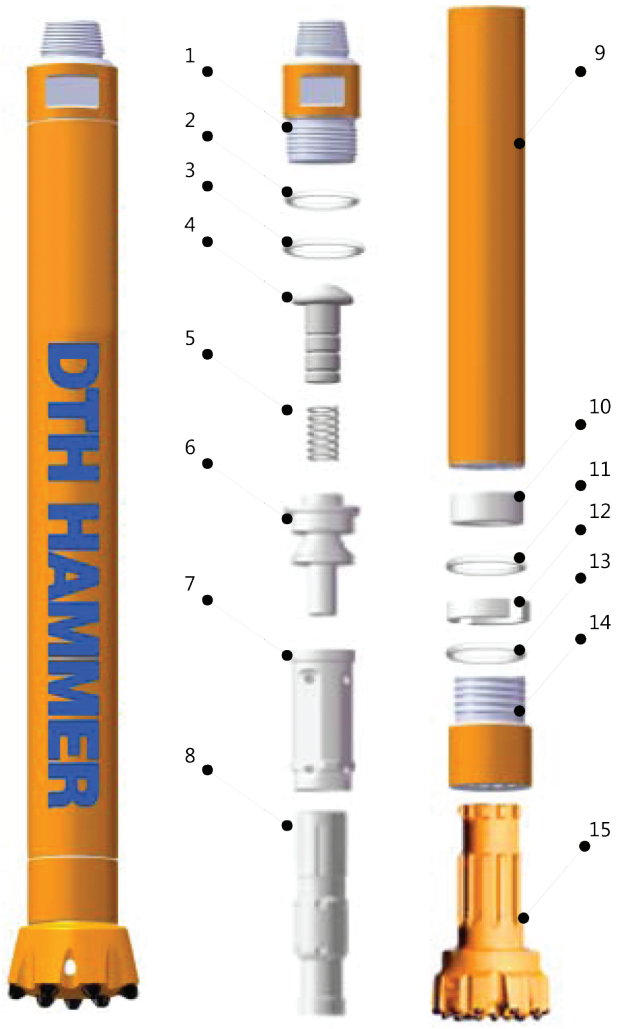

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	110.00	242.51	DHN125W01
2	O-ring of top sub	0.04	0.09	DHN125W02
3	Breakout ring	1.00	2.20	DHN125W03
4	Check valve	2.00	4.41	DHN125W04
5	Spring	0.10	0.22	DHN125W05
6	Air distributor	16.00	35.27	DHN125W06
7	Internal cylinder	25.00	55.12	DHN125W07
8	Piston	115.00	253.53	DHN125W08
9	External cylinder	175.00	385.81	DHN125W09
10	Guided sleeve	23.00	50.71	DHN125W10
11	O-ring of stop ring	0.01	0.02	DHN125W11
12	Stop ring	5.00	11.02	DHN125W12
13	Breakout ring	1.00	2.20	DHN125W13
14	Drive sub	45.00	99.21	DHN125W14
15	Drill bit			DHN125W15

Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
518.00	1141.99	275	10.83	1880	74.02	305 - 445	12.01 - 17.52	NUMA125

Connection thread	Working pressure	Impact rate at 1.7 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
6 5/8" API reg.	1.0 - 2.5	20	15 - 25	836 - 1150

DTH drill bits

12"

Button bits	Part No.	D		Buttons				Flushing	Angle	Weight	Available types
		[mm]	[in]	[No.]	[mm]	[No.]	[mm]	[No.]	[°]	[kg]	
	DHB305DHH120FF	305	12	15	× 19	36	× 18	3	38	128.0	CC*, CV*
	DHB311DHH120FF	311	12 1/4	15	× 19	36	× 18	3	38	130.0	CC*, CV*
	DHB315DHH120FF	315	12 3/8	15	× 19	42	× 18	3	38	134.0	CC*, CV*
	DHB330DHH120FF	330	13	15	× 19	42	× 18	3	38	138.0	CC*, CV*
	DHB343DHH120FF	343	13 1/2	15	× 19	42	× 18	3	38	143.0	CC*, CV*
	DHB350DHH120FF	350	13 3/4	15	× 19	44	× 18	3	38	146.0	CC*, CV*
	DHB356DHH120FF	356	14	15	× 19	44	× 18	3	38	148.0	CC*, CV*
	DHB368DHH120FF	368	14 1/2	15	× 19	40	× 19	3	38	154.0	CC*, CV*
	DHB375DHH120FF	375	14 3/4	15	× 19	40	× 19	3	38	158.0	CC*, CV*
DHD1120	DHB381DHH120FF	381	15	15	× 19	40	× 19	3	38	163.0	CC*, CV*
	DHB305SD12FF	305	12	15	× 19	36	× 18	3	38	130.0	CC*, CV*
	DHB311SD12FF	311	12 1/4	15	× 19	36	× 18	3	38	132.0	CC*, CV*
	DHB315SD12FF	315	12 3/8	15	× 19	42	× 18	3	38	136.0	CC*, CV*
	DHB330SD12FF	330	13	15	× 19	42	× 18	3	38	140.0	CC*, CV*
	DHB343SD12FF	343	13 1/2	15	× 19	42	× 18	3	38	145.0	CC*, CV*
	DHB350SD12FF	350	13 3/4	15	× 19	44	× 18	3	38	148.0	CC*, CV*
	DHB356SD12FF	356	14	15	× 19	44	× 18	3	38	150.0	CC*, CV*
	DHB368SD12FF	368	14 1/2	15	× 19	40	× 19	3	38	156.0	CC*, CV*
	DHB375SD12FF	375	14 3/4	15	× 19	40	× 19	3	38	160.0	CC*, CV*
SD12	DHB381SD12FF	381	15	15	× 19	40	× 19	3	38	164.0	CC*, CV*
	DHB305N120FF	305	12	15	× 19	36	× 18	3	38	132.0	CC*, CV*
	DHB311N120FF	311	12 1/4	15	× 19	36	× 18	3	38	134.0	CC*, CV*
	DHB315N120FF	315	12 3/8	15	× 19	42	× 18	3	38	138.0	CC*, CV*
	DHB330N120FF	330	13	15	× 19	42	× 18	3	38	142.0	CC*, CV*
	DHB343N120FF	343	13 1/2	15	× 19	42	× 18	3	38	146.0	CC*, CV*
	DHB350N120FF	350	13 3/4	15	× 19	44	× 18	3	38	150.0	CC*, CV*
	DHB356N120FF	356	14	15	× 19	44	× 18	3	38	152.0	CC*, CV*
	DHB368N120FF	368	14 1/2	15	× 19	40	× 19	3	38	160.0	CC*, CV*
	DHB375N120FF	375	14 3/4	15	× 19	40	× 19	3	38	162.0	CC*, CV*
NUMA120	DHB381N120FF	381	15	15	× 19	40	× 19	3	38	170.0	CC*, CV*
	DHB305N125FF	305	12	15	× 19	36	× 18	3	38	132.0	CC*, CV*
	DHB311N125FF	311	12 1/4	15	× 19	36	× 18	3	38	134.0	CC*, CV*
	DHB315N125FF	315	12 3/8	15	× 19	42	× 18	3	38	138.0	CC*, CV*
	DHB330N125FF	330	13	15	× 19	42	× 18	3	38	142.0	CC*, CV*
	DHB343N125FF	343	13 1/2	15	× 19	42	× 18	3	38	146.0	CC*, CV*
	DHB350N125FF	350	13 3/4	15	× 19	44	× 18	3	38	150.0	CC*, CV*
	DHB356N125FF	356	14	15	× 19	44	× 18	3	38	152.0	CC*, CV*
	DHB368N125FF	368	14 1/2	15	× 19	40	× 19	3	38	160.0	CC*, CV*
	DHB375N125FF	375	14 3/4	15	× 19	40	× 19	3	38	162.0	CC*, CV*
NUMA125	DHB381N125FF	381	15	15	× 19	40	× 19	3	38	170.0	CC*, CV*

*CC: Concave; CV: Convex; FF: Flat face.

DTH drill bits

15", 20", 24"

15"

Button bits	Part No.	D		Buttons				Flushing	Angle	Weight	Available types
		[mm]	[in]	[No.]	[mm]	[No.]	[mm]	[No.]	[°]	[kg]	
	DHB381DHH150FF	381	15	15	× 19	40	× 19	3	38	237.0	CC*, CV*
	DHB391DHH150FF	391	15 3/8	15	× 19	40	× 19	3	38	244.0	CC*, CV*
	DHB413DHH150FF	413	16 1/4	15	× 19	44	× 19	3	38	232.0	CC*, CV*
	DHB435DHH150FF	435	17 1/8	18	× 19	44	× 19	3	38	282.0	CC*, CV*
	DHB438DHH150FF	438	17 1/4	18	× 19	44	× 19	3	38	282.0	CC*, CV*
	DHB445DHH150FF	445	17 1/2	18	× 19	44	× 19	3	38	282.0	CC*, CV*
	DHB451DHH150FF	451	17 3/4	18	× 19	44	× 19	3	35	289.0	CC*, CV*
	DHB457DHH150FF	457	18	18	× 25	47	× 19	3	35	295.0	CC*, CV*
	DHB464DHH150FF	464	18 1/4	18	× 25	47	× 19	3	35	299.0	CC*, CV*
	DHB483DHH150FF	483	19	20	× 25	57	× 19	3	35	330.0	CC*, CV*
HD330	DHB508DHH150FF	508	20	20	25	61	19	3	35	342.0	CC*, CV*

20"

Button bits	Part No.	D		Buttons				Flushing	Angle	Weight	Available types
		[mm]	[in]	[No.]	[mm]	[No.]	[mm]	[No.]	[°]	[kg]	
	DHB483DHH200FF	483	19	20	× 25	57	× 19	3	35	330.0	CC*, CV*
	DHB508DHH200FF	508	20	20	× 25	61	× 19	3	35	342.0	CC*, CV*
	DHB560DHH200FF	560	22	16	× 25	50	× 25	4	35	523.0	CC*, CV*
	DHB578DHH200FF	578	22 3/4	16	× 25	50	× 25	4	35	505.0	CC*, CV*
	DHB610DHH200FF	610	24	16	× 25	59	× 25	4	35	545.0	CC*, CV*
HD450	DHB660DHH200FF	660	26	24	× 25	69	× 25	6	35	610.0	CC*, CV*

25"

Button bits	Part No.	D		Buttons				Flushing	Angle	Weight	Available types
		[mm]	[in]	[No.]	[mm]	[No.]	[mm]	[No.]	[°]	[kg]	
	DHB610DHH250FF	610	24	16	× 25	59	× 25	4	35	545.0	CC*, CV*
	DHB660DHH250FF	660	26	24	× 25	69	× 25	6	35	608.0	CC*, CV*
	DHB724DHH250FF	724	28 1/2	24	× 25	69	× 25	6	35	990.0	CC*, CV*
	DHB737DHH250FF	737	29	24	× 25	69	× 25	6	35	980.0	CC*, CV*
	DHB762DHH250FF	762	30	24	× 25	73	× 25	6	35	1020.0	CC*, CV*
	DHB864DHH250FF	864	34	24	× 25	96	× 25	6	35	1200.0	CC*, CV*
HD525	DHB914DHH250FF	914	36	24	× 25	108	× 25	6	35	1280.0	CC*, CV*

*CC: Concave; CV: Convex; FF: Flat face.

PIC8 ROCK TOOLS

RC hammers and drill bits



RC HAMMER OVERVIEW

HRC series reverse circulation DTH Hammer is the latest developed product. It is mainly used for in-pit grade control and normal exploration drilling.

SELECTING THE RIGHT HAMMER

→ Based on previous experience of ordinary hammers, the RC Hammer, with its features of reverse circulation, optimizes the internal structure and energy transfer, thus ensuring the series of hammers drilling with fast, smooth and continuous sampling.

→ The internal structure is very simple with long life and easy maintenance of the hammer.

→ The collection tube adopts an integrative design and can be replaced without treatment, it has good abrasive resistance.

→ Equipped with bits designed with patent, the hammer can drill holes of different sizes, ensuring that the sample is not contaminated.

→ In difficult conditions such as loose soil, hard rock and that with lots of water, sampling can be done well.

Explanation of code

Example: JRC5P40

J-PIC8 Rock Tools

RC - Reverse Circulation DTH hammer


5 - 5″ DTH hammer

P40 - P40 bit shank

RC hammer

JRC3E531

3"

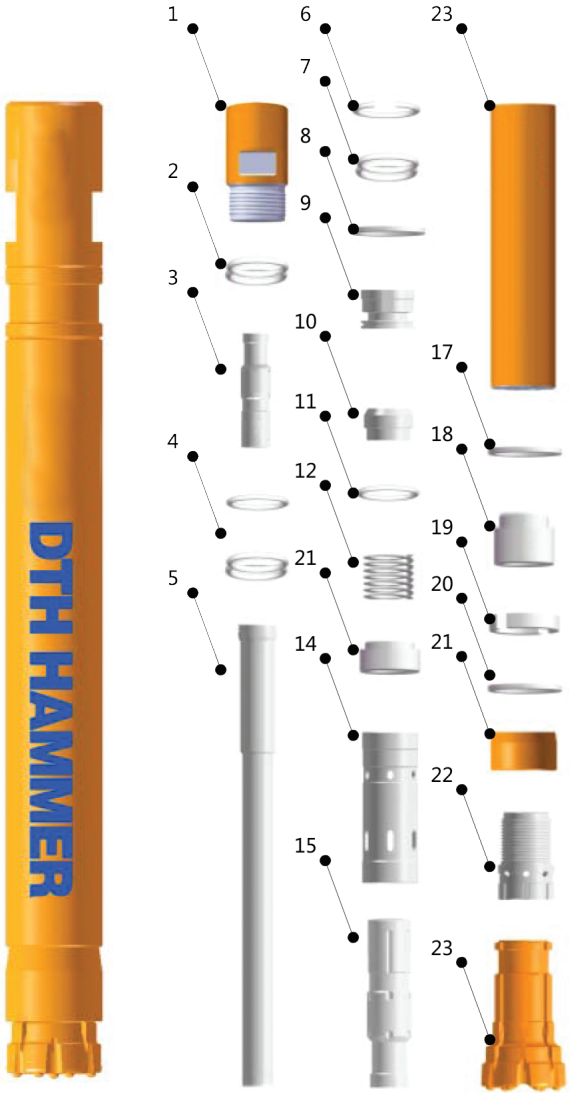

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	3.76	8.29	JRC3E53101
2	O-ring	0.01	0.02	JRC3E53102
3	Adapter screen	1.85	4.08	JRC3E53103
4	O-ring	0.01	0.02	JRC3E53104
5	Sample tube	1.97	4.34	JRC3E53105
6	Circlip	0.04	0.09	JRC3E53106
7	O-ring	0.01	0.02	JRC3E53107
8	O-ring	0.01	0.02	JRC3E53108
9	Air distributor	0.37	0.82	JRC3E53109
10	Check valve	0.08	0.18	JRC3E53110
11	O-ring	0.01	0.02	JRC3E53111
12	Spring	0.10	0.22	JRC3E53112
13	Mount sample tube	0.49	1.08	JRC3E53113
14	Internal cylinder	3.40	7.50	JRC3E53114
15	Piston	4.69	10.34	JRC3E53115
16	External cylinder	9.20	20.28	JRC3E53116
17	Seal cover	0.02	0.04	JRC3E53117
18	Bush drive sub	1.03	2.27	JRC3E53118
19	Bit retainer ring	0.08	0.18	JRC3E53119
20	O-ring	0.01	0.02	JRC3E53120
21	Shroud	0.45	0.99	JRC3E53121
22	Drive sub	1.60	3.53	JRC3E53122
23	Drill bit	4.20	9.26	JRC3E53123

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
29.00	63.93	81	3.19	1069	42.09	84 - 100	3.31 - 3.94	RE531

Connection thread	Working pressure	Impact rate at 2.4 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
3" Remet	1.0 - 3.0	30	25 - 40	200 - 600

RC hammer

JRC4E004

4"

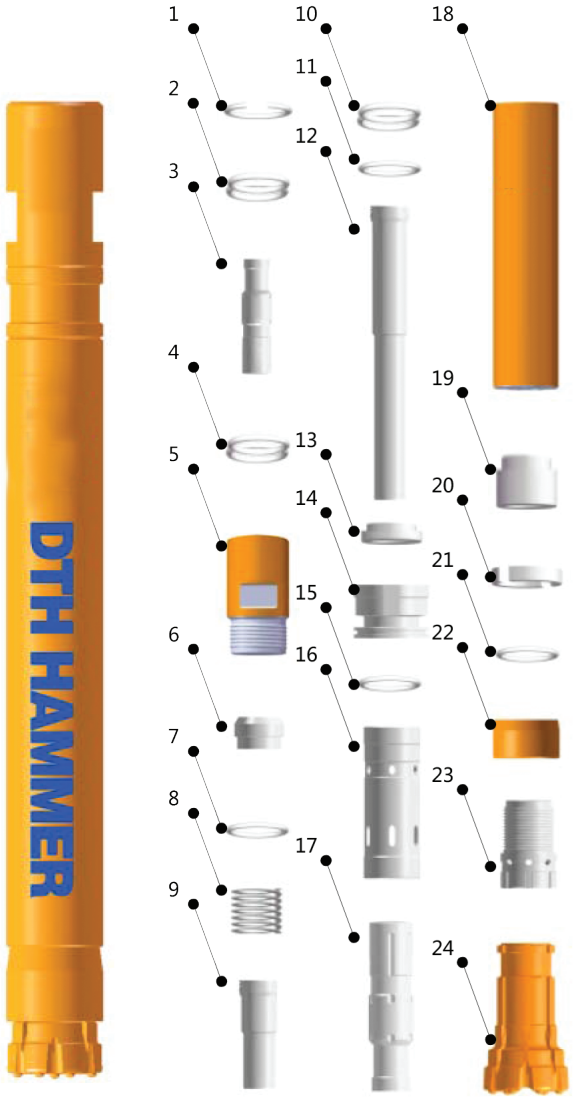

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Circlip	0.02	0.04	JRC4E00401
2	O-ring	0.02	0.04	JRC4E00402
3	Adapter screen	1.06	2.34	JRC4E00403
4	O-ring	0.02	0.04	JRC4E00404
5	Top sub	7.79	17.17	JRC4E00405
6	Check valve	0.51	1.12	JRC4E00406
7	Y-ring	0.02	0.04	JRC4E00407
8	Spring	0.06	0.13	JRC4E00408
9	Sample tube upper	0.74	1.63	JRC4E00409
10	O-ring	0.02	0.04	JRC4E00410
11	O-ring	0.02	0.04	JRC4E00411
12	Sample tube lower	2.38	5.25	JRC4E00412
13	Spring washers	0.17	0.37	JRC4E00413
14	Air distributor	1.75	3.86	JRC4E00414
15	O-ring	0.02	0.04	JRC4E00415
16	Piston	2.45	5.40	JRC4E00416
17	Internal cylinder	10.45	23.04	JRC4E00417
18	External cylinder	17.95	39.57	JRC4E00418
19	Bush drive sub	1.77	3.90	JRC4E00419
20	Bit retainer ring	0.29	0.64	JRC4E00420
21	O-ring	0.02	0.04	JRC4E00421
22	Shroud	1.05	2.31	JRC4E00422
23	Drive sub	3.13	6.90	JRC4E00423
24	Drill bit	11.70	25.79	JRC4E00424

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
52.00	114.64	107	4.21	1252	49.29	111 - 127	4.37 - 5.00	RE004

Connection thread	Working pressure	Impact rate at 2.4 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
3.5" - 4" Remet 4" Metzke	1.0 - 3.0	30	25 - 40	200 - 600

RC hammer

JRC45E542

4.5"

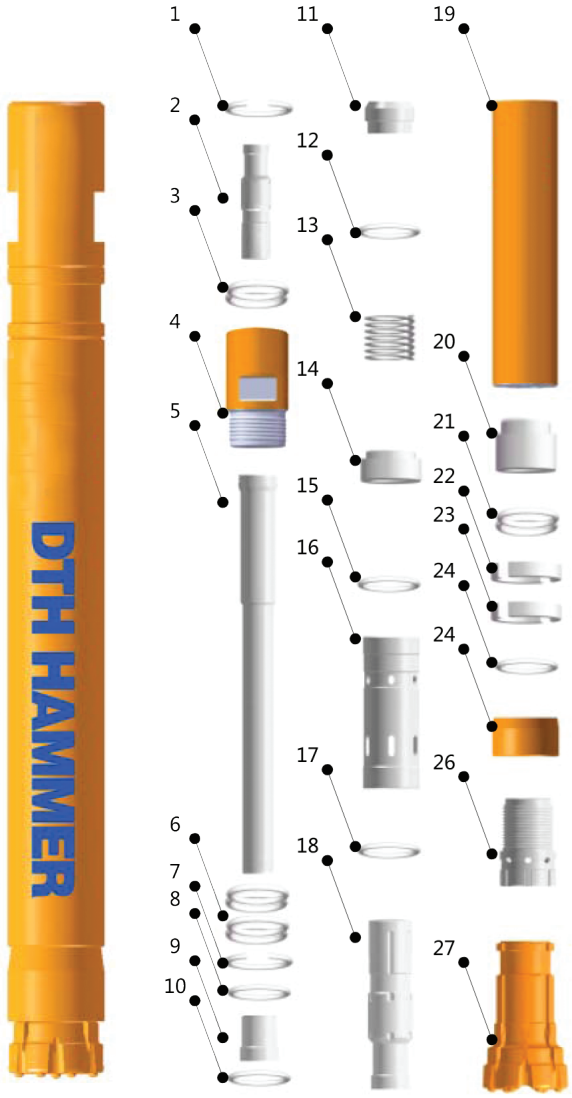

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Circlip	0.04	0.09	JRC45E54201
2	Adapter screen	2.55	5.62	JRC45E54202
3	O-ring	0.02	0.04	JRC45E54203
4	Top sub	8.52	18.78	JRC45E54204
5	Sample tube	3.50	7.72	JRC45E54205
6	O-ring	0.02	0.04	JRC45E54206
7	Circlip	0.04	0.09	JRC45E54207
8	Air screen	0.02	0.04	JRC45E54208
9	Distributor nozzle	0.56	1.23	JRC45E54209
10	O-ring	0.02	0.04	JRC45E54210
11	Check valve	0.50	1.10	JRC45E54211
12	Y-ring	0.02	0.04	JRC45E54212
13	Spring	0.08	0.18	JRC45E54213
14	Mount sample tube	0.86	1.90	JRC45E54214
15	O-ring	0.02	0.04	JRC45E54215
16	Internal cylinder	7.26	16.01	JRC45E54216
17	O-ring	0.02	0.04	JRC45E54217
18	Piston	11.64	25.66	JRC45E54218
19	External cylinder	19.17	42.26	JRC45E54219
20	Bush drive sub	2.35	5.18	JRC45E54220
21	O-ring	0.02	0.04	JRC45E54221
22	Piston retainer ring	0.05	0.11	JRC45E54222
23	Bit retainer ring	0.26	0.57	JRC45E54223
24	O-ring	0.02	0.04	JRC45E54224
25	Shroud	2.21	4.87	JRC45E54225
26	Drive sub	2.94	6.48	JRC45E54226
27	Drill bit	10.96	24.16	JRC45E54227

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
51.00	112.44	109.5	4.31	1191	46.89	113 - 130	4.45 - 5.12	RE542

Connection thread	Working pressure	Impact rate at 2.4 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
3.5" - 4" Remet 4" Metzke	1.5 - 3.5	35	25 - 40	600 - 836

RC hammer

JRC45E543

4.5"

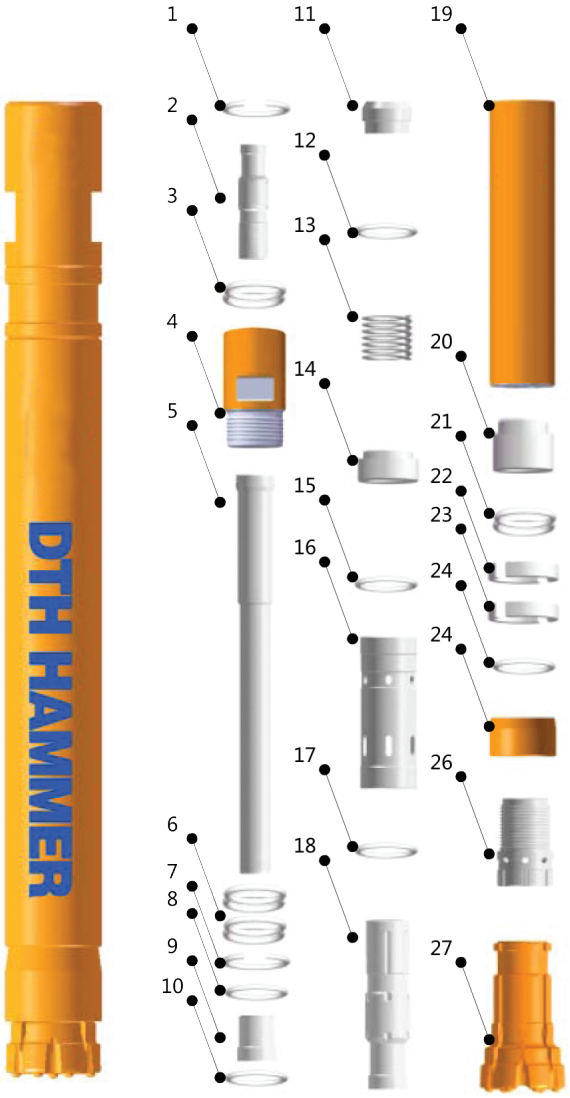

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Circlip	0.04	0.09	JRC45E54301
2	Adapter screen	2.55	5.62	JRC45E54302
3	O-ring	0.02	0.04	JRC45E54303
4	Top sub	8.52	18.78	JRC45E54304
5	Sample tube	3.50	7.72	JRC45E54305
6	O-ring	0.02	0.04	JRC45E54306
7	Circlip	0.04	0.09	JRC45E54307
8	Air screen	0.02	0.04	JRC45E54308
9	Distributor nozzle	0.56	1.23	JRC45E54309
10	O-ring	0.02	0.04	JRC45E54310
11	Check valve	0.50	1.10	JRC45E54311
12	Y-ring	0.02	0.04	JRC45E54312
13	Spring	0.08	0.18	JRC45E54313
14	Mount sample tube	0.86	1.90	JRC45E54314
15	O-ring	0.02	0.04	JRC45E54315
16	Internal cylinder	7.26	16.01	JRC45E54316
17	O-ring	0.02	0.04	JRC45E54317
18	Piston	11.64	25.66	JRC45E54318
19	External cylinder	19.17	42.26	JRC45E54319
20	Bush drive sub	2.35	5.18	JRC45E54320
21	O-ring	0.02	0.04	JRC45E54321
22	Piston retainer ring	0.05	0.11	JRC45E54322
23	Bit retainer ring	0.26	0.57	JRC45E54323
24	O-ring	0.02	0.04	JRC45E54324
25	Shroud	2.21	4.87	JRC45E54325
26	Drive sub	2.94	6.48	JRC45E54326
27	Drill bit	10.96	24.16	JRC45E54327

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
62.00	136.69	116	4.57	1191	46.89	120 - 135	4.72 - 5.31	RE543

Connection thread	Working pressure	Impact rate at 2.4 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
3.5" - 4" Remet 4" Metzke	1.5 - 3.5	35	25 - 40	600 - 836

RC hammer

JRC5E545

5"

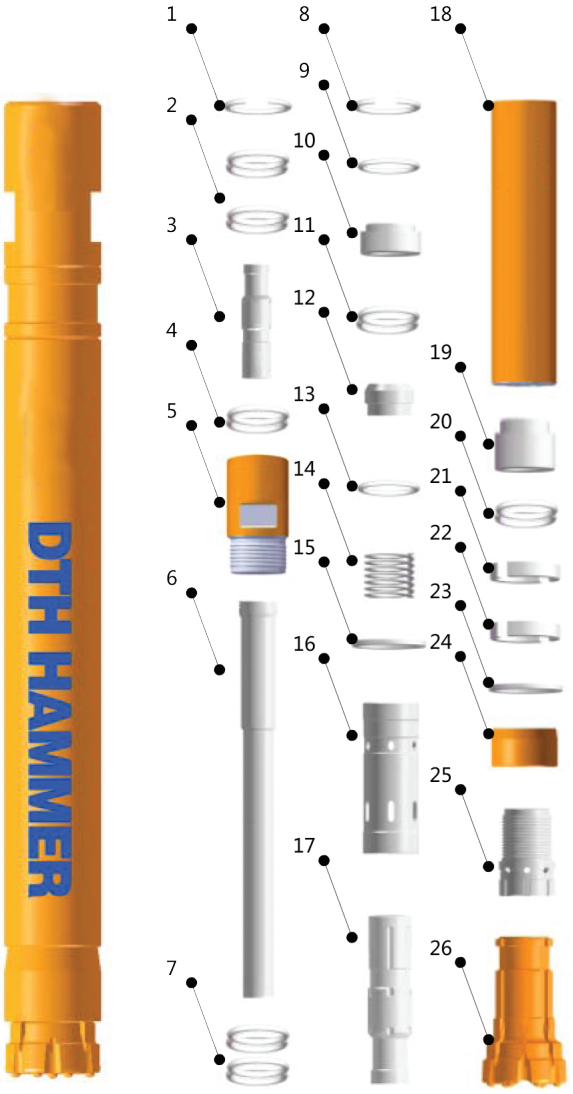

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Circlip	0.04	0.09	JRC5E54501
2	O-ring	0.02	0.04	JRC5E54502
3	Adapter screen	2.95	6.50	JRC5E54503
4	O-ring	0.02	0.04	JRC5E54504
5	Top sub	6.98	15.39	JRC5E54505
6	Sample tube	4.61	10.16	JRC5E54506
7	O-ring	0.02	0.04	JRC5E54507
8	Circlip	0.04	0.09	JRC5E54508
9	Air screen	0.02	0.04	JRC5E54509
10	Distributor nozzle	0.48	1.06	JRC5E54510
11	O-ring	0.02	0.04	JRC5E54511
12	Check valve	0.53	1.17	JRC5E54512
13	Y-ring	0.02	0.04	JRC5E54513
14	Spring	0.12	0.26	JRC5E54514
15	O-ring	0.02	0.04	JRC5E54515
16	Internal cylinder	10.20	22.49	JRC5E54516
17	Piston	15.10	33.29	JRC5E54517
18	External cylinder	17.20	37.92	JRC5E54518
19	Bush drive sub	2.95	6.50	JRC5E54519
20	O-ring	0.02	0.04	JRC5E54520
21	Piston retainer ring	0.04	0.09	JRC5E54521
22	Bit retainer ring	0.23	0.51	JRC5E54522
23	O-ring	0.02	0.04	JRC5E54523
24	Shroud	1.60	3.53	JRC5E54524
25	Drive sub	3.41	7.52	JRC5E54525
26	Drill bit	12.60	27.78	JRC5E54526

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
65.00	143.30	117.5	4.63	1261	49.65	122 - 135	4.80 - 5.31	RE545

Connection thread	Working pressure	Impact rate at 2.4 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
4" - 4.5" Remet 4" - 4.5" Metzke	1.5 - 3.5	35	25 - 40	600 - 836

RC hammer

JRC5P40

5"

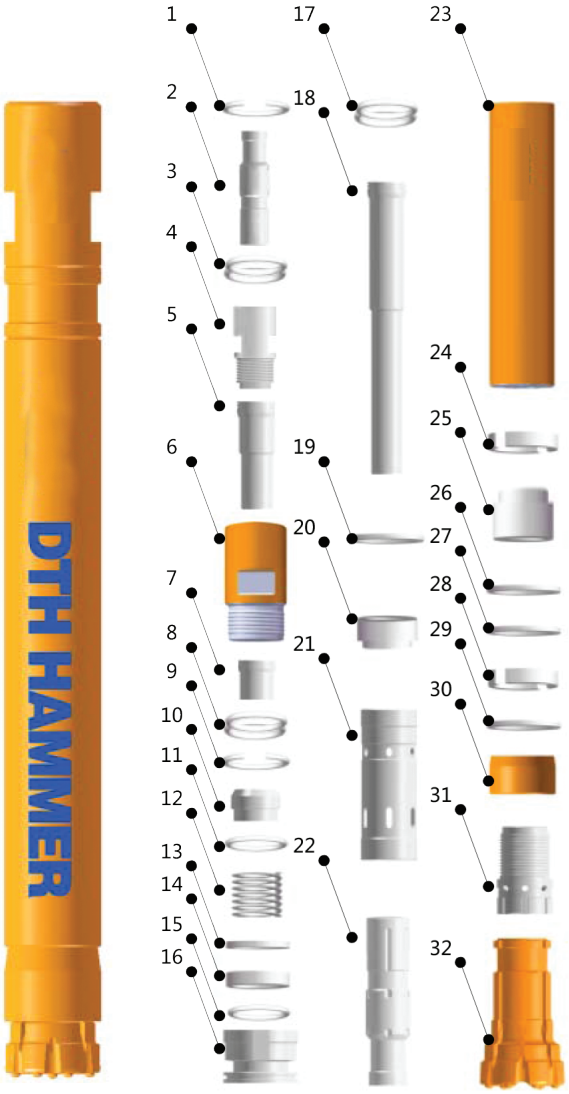

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Circlip	0.04	0.09	JRC5P4001
2	Adapter screen	1.51	3.33	JRC5P4002
3	O-ring	0.02	0.04	JRC5P4003
4	Top sub	5.96	13.14	JRC5P4004
5	Sample tube upper	1.33	2.93	JRC5P4005
6	Top sub	9.81	21.63	JRC5P4006
7	Air screen bottom load	0.27	0.60	JRC5P4007
8	O-ring	0.02	0.04	JRC5P4008
9	Circlip	0.03	0.07	JRC5P4009
10	Check valve	0.63	1.39	JRC5P4010
11	Y-ring	0.02	0.04	JRC5P4011
12	Spring	0.12	0.26	JRC5P4012
13	Make up ring steel	0.09	0.20	JRC5P4013
14	Viton make up ring	0.06	0.13	JRC5P4014
15	O-ring	0.02	0.04	JRC5P4015
16	Air distributor	1.34	2.95	JRC5P4016
17	O-ring	0.02	0.04	JRC5P4017
18	Sample tube lower	4.32	9.52	JRC5P4018
19	O-ring	0.02	0.04	JRC5P4019
20	Mount sample tube	0.97	2.14	JRC5P4020
21	Internal cylinder	7.69	16.95	JRC5P4021
22	Piston	13.63	30.05	JRC5P4022
23	External cylinder	24.14	53.22	JRC5P4023
24	Piston retainer ring	0.15	0.33	JRC5P4024
25	Bush drive sub	1.96	4.32	JRC5P4025
26	O-ring	0.02	0.04	JRC5P4026
27	O-ring	0.02	0.04	JRC5P4027
28	Bit retainer ring	0.31	0.68	JRC5P4028
29	O-ring	0.02	0.04	JRC5P4029
30	Shroud	2.20	4.85	JRC5P4030
31	Drive sub	3.67	8.09	JRC5P4031
32	Drill bit	15.09	33.27	JRC5P4032

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
80.50	177.47	120.5	4.74	1362	53.62	124 - 142	4.88 - 5.59	PR40

Connection thread	Working pressure	Impact rate at 2.4 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
3.5" - 4.5" Remet 3.5" - 4.5" Metzke	1.5 - 3.5	35	25 - 40	600 - 836

RC hammer

JRC55P52

5.5"

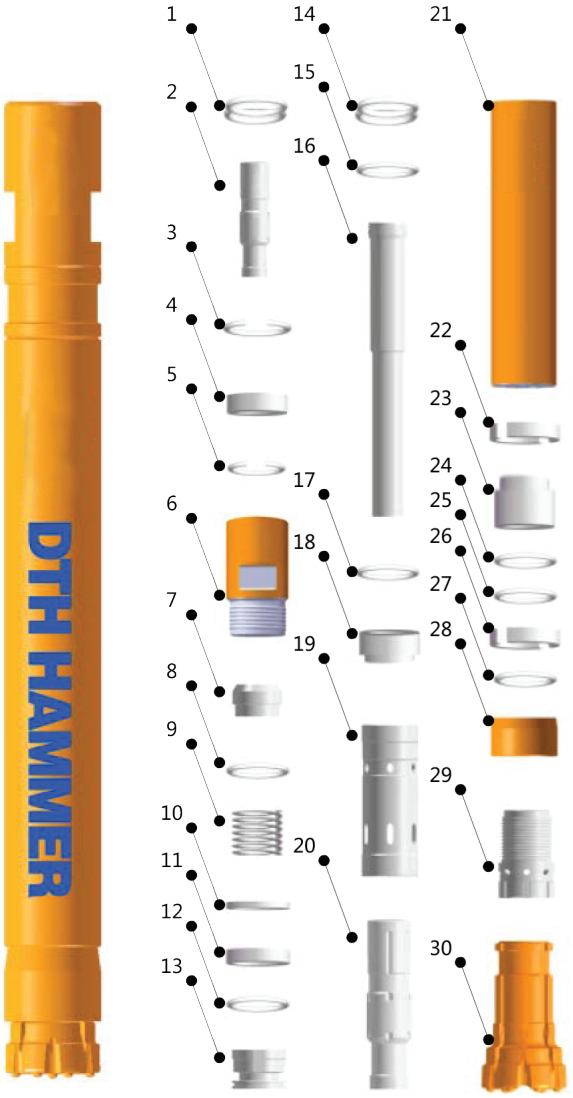

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	O-ring	0.02	0.04	JRC55P5201
2	Adapter screen	2.19	4.83	JRC55P5202
3	Circlip	0.04	0.09	JRC55P5203
4	Adapter top load	0.42	0.93	JRC55P5204
5	Circlip	0.03	0.07	JRC55P5205
6	Top sub	8.92	19.67	JRC55P5206
7	Check valve	0.63	1.39	JRC55P5207
8	Y-ring	0.03	0.07	JRC55P5208
9	Spring	0.12	0.26	JRC55P5209
10	Make up ring steel	0.10	0.22	JRC55P5210
11	Viton make up ring	0.05	0.11	JRC55P5211
12	O-ring	0.02	0.04	JRC55P5212
13	Air distributor	1.31	2.89	JRC55P5213
14	O-ring	0.02	0.04	JRC55P5214
15	O-ring	0.02	0.04	JRC55P5215
16	Sample tube	4.52	9.96	JRC55P5216
17	O-ring	0.02	0.04	JRC55P5217
18	Mount sample tube	0.80	1.76	JRC55P5218
19	Internal cylinder	7.39	16.29	JRC55P5219
20	Piston	14.63	32.25	JRC55P5220
21	External cylinder	18.86	41.58	JRC55P5221
22	Piston retainer ring	0.13	0.29	JRC55P5222
23	Bush drive sub	1.89	4.17	JRC55P5223
24	O-ring	0.02	0.04	JRC55P5224
25	O-ring	0.02	0.04	JRC55P5225
26	Bit retainer ring	0.31	0.68	JRC55P5226
27	O-ring	0.02	0.04	JRC55P5227
28	Shroud	1.86	4.10	JRC55P5228
29	Drive sub	4.17	9.19	JRC55P5229
30	Drill bit	11.01	24.27	JRC55P5230

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
68.50	151.02	121	4.76	1227	48.31	126 - 142	4.96 - 5.59	PR52

Connection thread	Working pressure	Impact rate at 2.4 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
4" - 4.5" Remet 4" - 4.5" Metzke	1.5 - 3.5	35	25 - 40	600 - 836

RC hammer

JRC55E547

5.5"

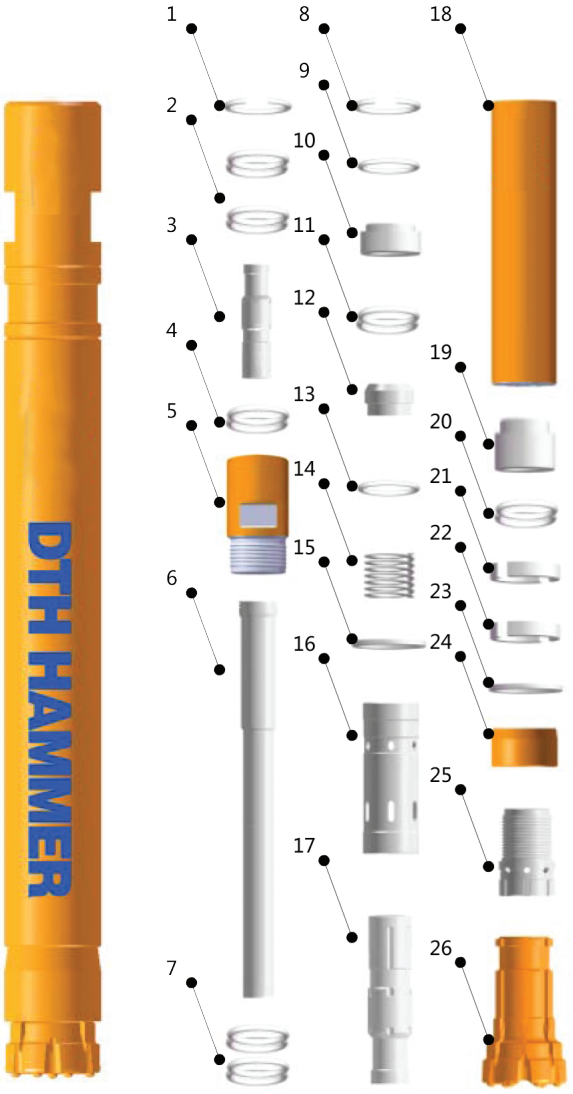

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Circlip	0.04	0.09	JRC55E54701
2	O-ring	0.02	0.04	JRC55E54702
3	Adapter screen	2.95	6.50	JRC55E54703
4	O-ring	0.02	0.04	JRC55E54704
5	Top sub	7.38	16.27	JRC55E54705
6	Sample tube	4.61	10.16	JRC55E54706
7	O-ring	0.02	0.04	JRC55E54707
8	Circlip	0.04	0.09	JRC55E54708
9	Air screen	0.02	0.04	JRC55E54709
10	Distributor nozzle	0.48	1.06	JRC55E54710
11	O-ring	0.02	0.04	JRC55E54711
12	Check valve	0.53	1.17	JRC55E54712
13	Y-ring	0.02	0.04	JRC55E54713
14	Spring	0.12	0.26	JRC55E54714
15	O-ring	0.02	0.04	JRC55E54715
16	Internal cylinder	10.97	24.18	JRC55E54716
17	Piston	17.08	37.65	JRC55E54717
18	External cylinder	18.55	40.90	JRC55E54718
19	Bush drive sub	3.04	6.70	JRC55E54719
20	O-ring	0.02	0.04	JRC55E54720
21	Piston retainer ring	0.04	0.09	JRC55E54721
22	Bit retainer ring	0.23	0.51	JRC55E54722
23	O-ring	0.02	0.04	JRC55E54723
24	Shroud	1.70	3.75	JRC55E54724
25	Drive sub	3.61	7.96	JRC55E54725
26	Drill bit	14.30	31.53	JRC55E54726


Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
71.00	156.53	124.5	4.90	1270	50.00	130 - 146	5.12 - 5.75	RE547

Connection thread	Working pressure	Impact rate at 2.4 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
4.5" Remet 4.5" Metzke	1.5 - 3.5	35	25 - 40	600 - 836

JRC55P54

5.5"

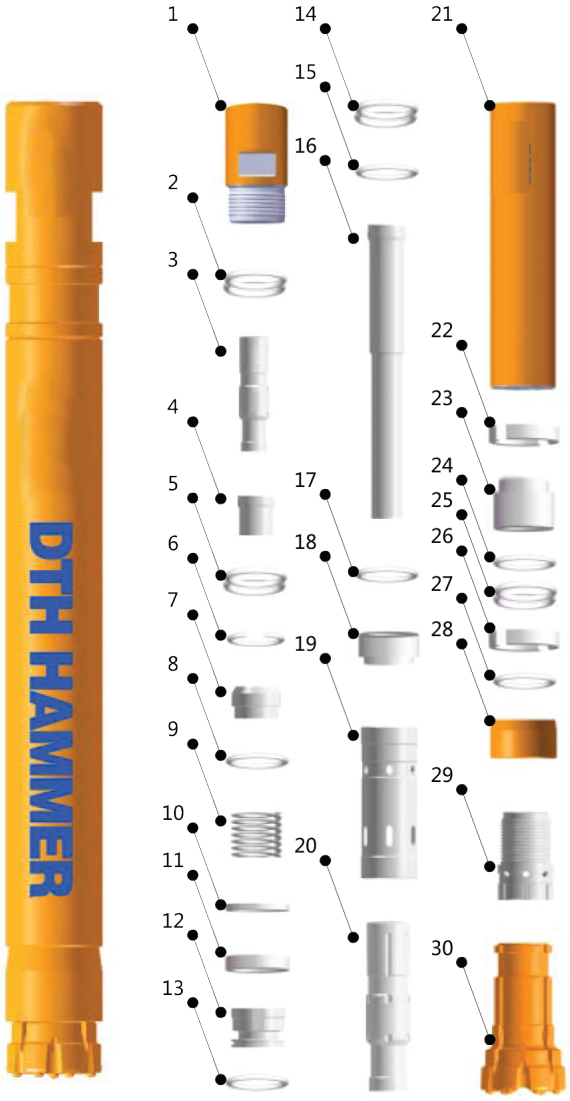

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	Top sub	11.61	25.60	JRC55P5401
2	O-ring	0.02	0.04	JRC55P5402
3	Adapter screen	2.35	5.18	JRC55P5403
4	Air screen	0.37	0.82	JRC55P5404
5	O-ring	0.02	0.04	JRC55P5405
6	Circlip	0.04	0.09	JRC55P5406
7	Check valve	0.58	1.28	JRC55P5407
8	Y-ring	0.02	0.04	JRC55P5408
9	Spring	0.12	0.26	JRC55P5409
10	Make up ring steel	0.14	0.31	JRC55P5410
11	Viton make up ring	0.06	0.13	JRC55P5411
12	Air distributor	1.54	3.40	JRC55P5412
13	O-ring	0.02	0.04	JRC55P5413
14	O-ring	0.02	0.04	JRC55P5414
15	O-ring	0.02	0.04	JRC55P5415
16	Sample tube	6.47	14.26	JRC55P5416
17	O-ring	0.02	0.04	JRC55P5417
18	Mount sample tube	1.02	2.25	JRC55P5418
19	Internal cylinder	8.54	18.83	JRC55P5419
20	Piston	17.20	37.92	JRC55P5420
21	External cylinder	23.44	51.68	JRC55P5421
22	Piston retainer ring	0.20	0.44	JRC55P5422
23	Bush drive sub	2.53	5.58	JRC55P5423
24	O-ring	0.02	0.04	JRC55P5424
25	O-ring	0.02	0.04	JRC55P5425
26	Bit retainer ring	0.43	0.95	JRC55P5426
27	O-ring	0.02	0.04	JRC55P5427
28	Shroud	2.35	5.18	JRC55P5428
29	Drive sub	4.90	10.80	JRC55P5429
30	Drill bit	18.33	40.41	JRC55P5430

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
84.50	186.29	130	5.12	1294	50.94	135 - 150	5.31 - 5.91	PR54

Connection thread	Working pressure	Impact rate at 2.4 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
4.5" Remet 4.5" Metzke	1.5 - 3.5	35	25 - 40	600 - 836

RC hammer

JRC6A

6"

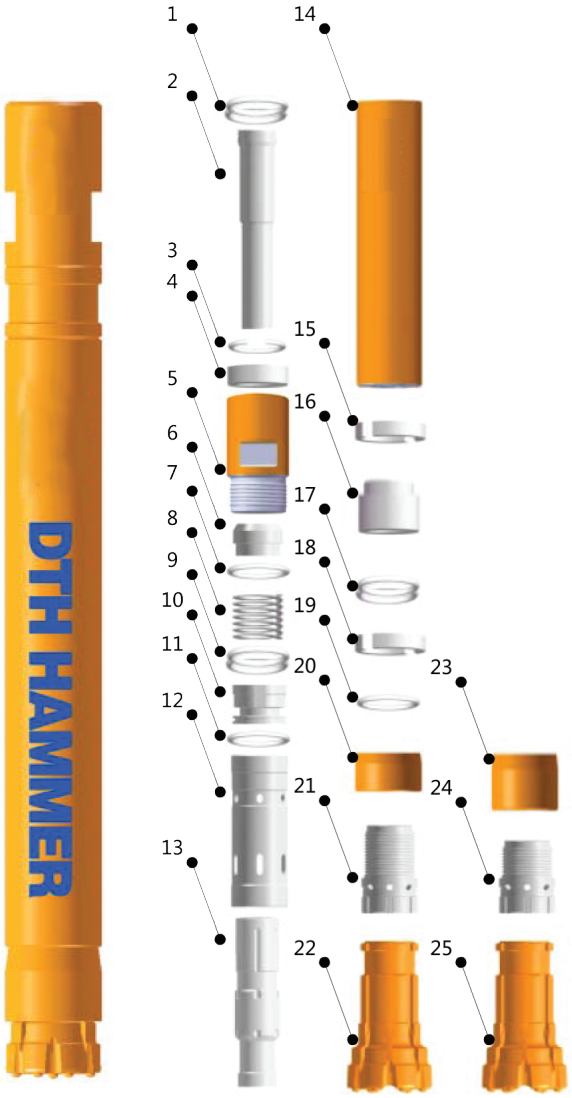

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	O-ring	0.03	0.07	JRC6A01
2	Sample tube	12.50	27.56	JRC6A02
3	Circlip	0.04	0.09	JRC6A03
4	Air screen top load	0.65	1.43	JRC6A04
5	Top sub	20.50	45.19	JRC6A05
6	Check valve	1.20	2.65	JRC6A06
7	Y-ring	0.03	0.07	JRC6A07
8	Spring	0.15	0.33	JRC6A08
9	O-ring	0.03	0.07	JRC6A09
10	Air distributor	2.65	5.84	JRC6A10
11	O-ring	0.03	0.07	JRC6A11
12	Internal cylinder	8.34	18.39	JRC6A12
13	Piston	24.15	53.24	JRC6A13
14	External cylinder	36.80	81.13	JRC6A14
15	Piston retainer ring	0.21	0.46	JRC6A15
16	Bush drive sub	3.50	7.72	JRC6A16
17	O-ring	0.03	0.07	JRC6A17
18	Bit retainer ring	0.58	1.28	JRC6A18
19	O-ring	0.03	0.07	JRC6A19
20	Shroud	3.46	7.63	JRC6A20
21	Drive sub	7.95	17.53	JRC6A21
22	Drill bit	20.60	45.42	JRC6A22
23	Anti-drop cover	5.20	11.46	JRC6A23
24	Anti-drop drive sub	7.40	16.31	JRC6A24
25	Anti-drop drill bit	23.20	51.15	JRC6A25

Hammer specification


Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
110.00	242.51	146	5.75	1320	51.97	152 - 190	5.98 - 7.48	RC6A / RC6AR

Connection thread	Working pressure	Impact rate at 2.4 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
Upon the thread of drill tube	1.5 - 3.5	28	25 - 40	600 - 836

RC hammer

JRC8A

8"

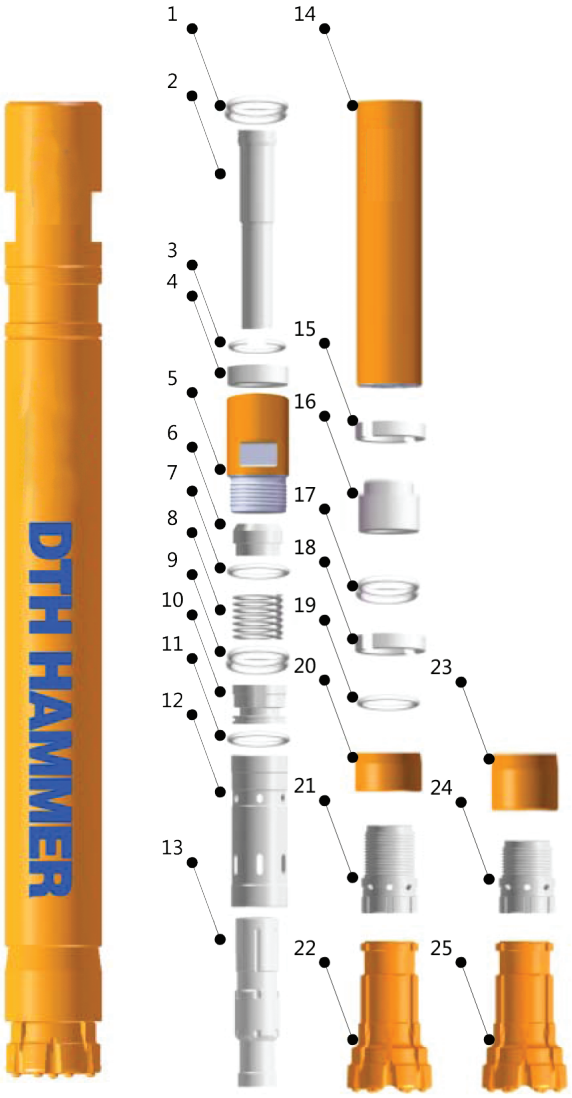

Component parts

Ref	Description	Weight, kg	Weight, lb	Part No.
1	O-ring	0.04	0.09	JRC8A01
2	Sample tube	20.50	45.19	JRC8A02
3	Circlip	0.08	0.18	JRC8A03
4	Air screen top load	1.15	2.54	JRC8A04
5	Top sub	32.00	70.55	JRC8A05
6	Check valve	2.25	4.96	JRC8A06
7	Y-ring	0.04	0.09	JRC8A07
8	Spring	0.25	0.55	JRC8A08
9	O-ring	0.04	0.09	JRC8A09
10	Air distributor	4.25	9.37	JRC8A10
11	O-ring	0.04	0.09	JRC8A11
12	Internal cylinder	16.15	35.60	JRC8A12
13	Piston	38.50	84.88	JRC8A13
14	External cylinder	61.30	135.14	JRC8A14
15	Piston retainer ring	0.45	0.99	JRC8A15
16	Bush drive sub	6.95	15.32	JRC8A16
17	O-ring	0.04	0.09	JRC8A17
18	Bit retainer ring	1.20	2.65	JRC8A18
19	O-ring	0.04	0.09	JRC8A19
20	Shroud	6.95	15.32	JRC8A20
21	Drive sub	15.40	33.95	JRC8A21
22	Drill bit	38.60	85.10	JRC8A22
23	Anti-drop cover	9.53	21.01	JRC8A23
24	Anti-drop drive sub	15.20	33.51	JRC8A24
25	Anti-drop drill bit	42.80	94.36	JRC8A25


Hammer specification

Weight (less bit)		Outside Dia.		Length (less bit)		Hole range		Bit shank
kg	lb	mm	in	mm	in	mm	in	
185.00	407.86	180	7.09	1395	54.92	190 - 250	7.48 - 9.84	RC8A / RC8AR

Connection thread	Working pressure	Impact rate at 2.4 Mpa	Recommended rotation speed	Air consumption, CFM
	Mpa	Hz	r/mins	145PSI - 350PSI
Upon the thread of drill tube	1.5 - 3.5	24	25 - 40	836 - 1150


PIC8 ROCK TOOLS

Overburden drilling systems

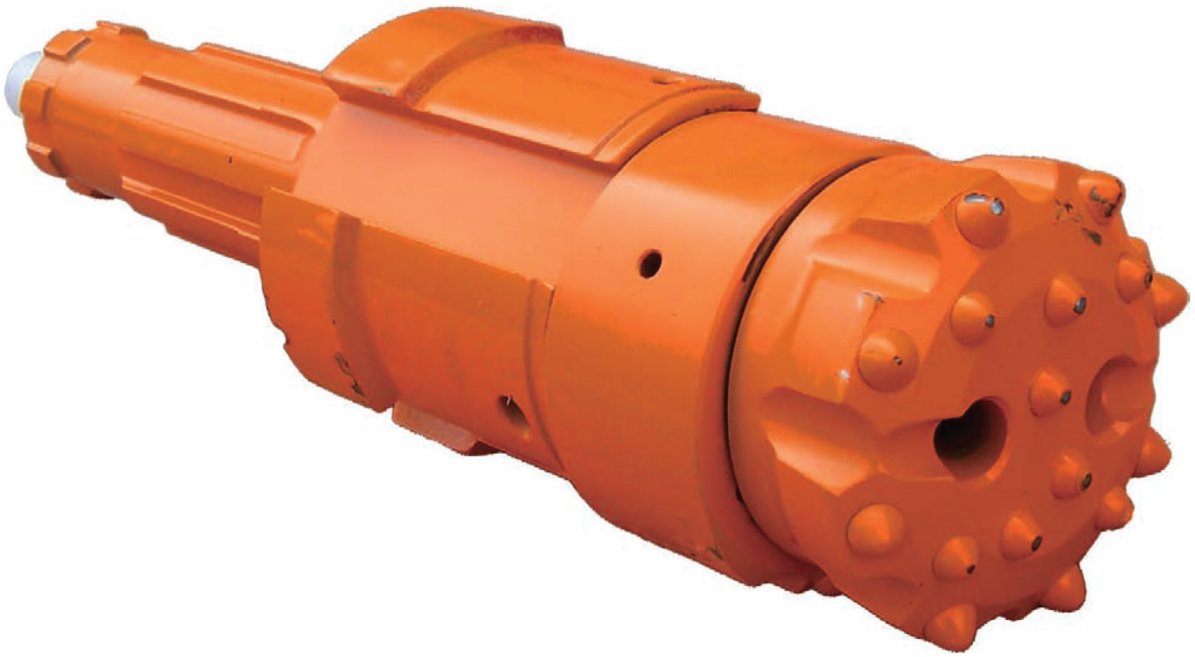


Overburden drilling system


OD90

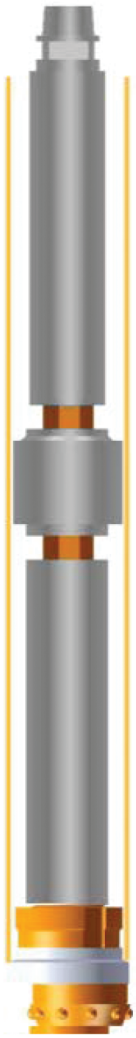

Component parts


Ref	Item	Description
1	Casing tube	Maximum O.D: 115mm Minimum O.D: 105mm
2	Drill pipe	Connection thread: API 2 3/8” O.D: 76mm Wrench flat: 65mm
3	Guide sleeve	Effective length: 225mm
4	DTH Hammer	HD35, COP34, SD3, IR3.5 MISSION30, QL30
5	Casing shoe	L3=80mm, L4=55mm D3=101.7mm, D4=93mm
6	Guide device	L1=38mm, L2=138mm D1=92mm, D2=100mm
7	Reamer	D5=91mm, L5=70mm Reamer has 4×12 buttons
8	Pilot bit	D6=90mm, L6=59mm Gauge button: 8×ϕ12 Face button: 5×ϕ10

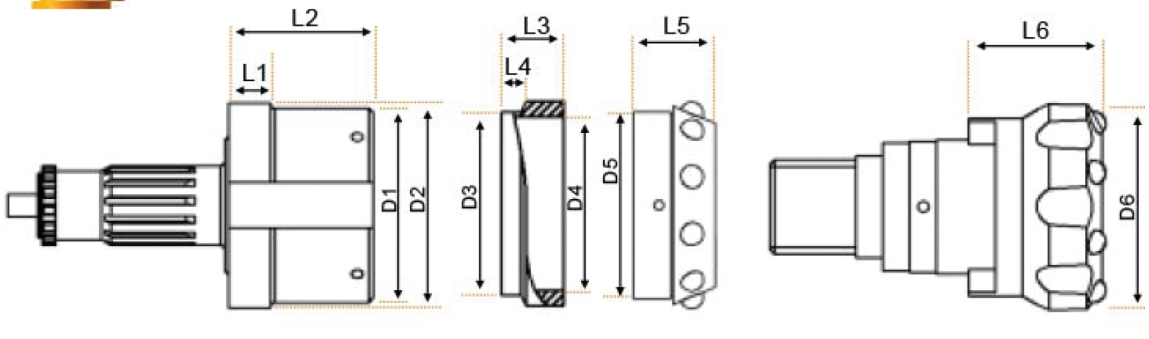

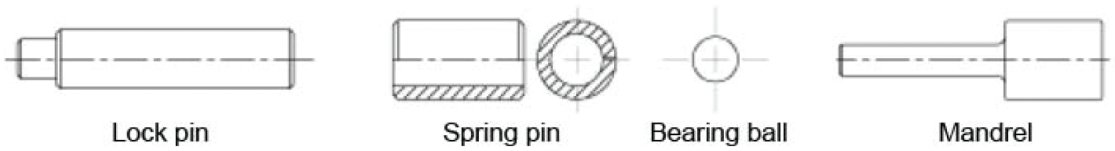


Overburden drilling system


OD115



Component parts


Ref	Item	Description
1	Casing tube	Maximum O.D: 142mm Minimum O.D: 128mm
2	Drill pipe	Connection thread: API 2 3/8″ O.D: 76mm Wrench flat: 65mm
3	Guide sleeve	Effective length: 225mm
4	DTH Hammer	HD45, COP44, SD4, DHD340A MISSION30, QL30
5	Casing shoe	L3=76mm, L4=50mm D3=127mm, D4=116mm
6	Guide device	L1=48mm, L2=136mm D1=115mm, D2=126mm
7	Reamer	D5=114mm, L5=89mm Reamer Diameter: 152mm Reamer has 5×14 buttons
8	Pilot bit	D6=114mm, L6=89mm Gauge button: 8×ϕ14 Face button: 6×ϕ12

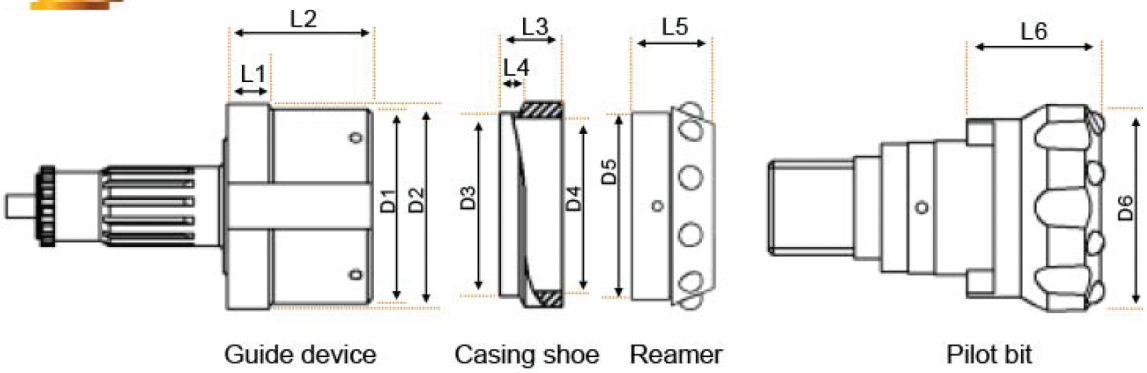

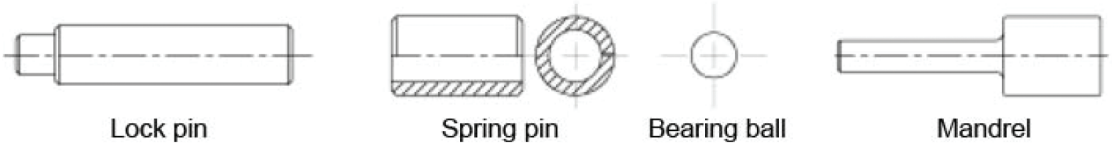


Overburden drilling system


OD140



Component parts


Ref	Item	Description
1	Casing tube	Maximum O.D: 171mm Minimum O.D: 155.6mm
2	Drill pipe	Connection thread: API 2 3/8″ O.D: 89mm Wrench flat: 65mm
3	Guide sleeve	Effective length: 225mm
4	DTH Hammer	HD55, COP54, SD4, SD5 DHD350R, MISSION50, QL50
5	Casing shoe	L3=90mm, L4=63mm D3=155.3mm, D4=141mm
6	Guide device	L1=48mm, L2=136mm D1=115mm, D2=126mm
7	Reamer	D5=138mm, L5=70mm Reamer Diameter: 185mm Reamer has 7×14 buttons
8	Pilot bit	D6=138mm, L6=66mm Gauge button: 8×ϕ16 Face button: 8×ϕ14

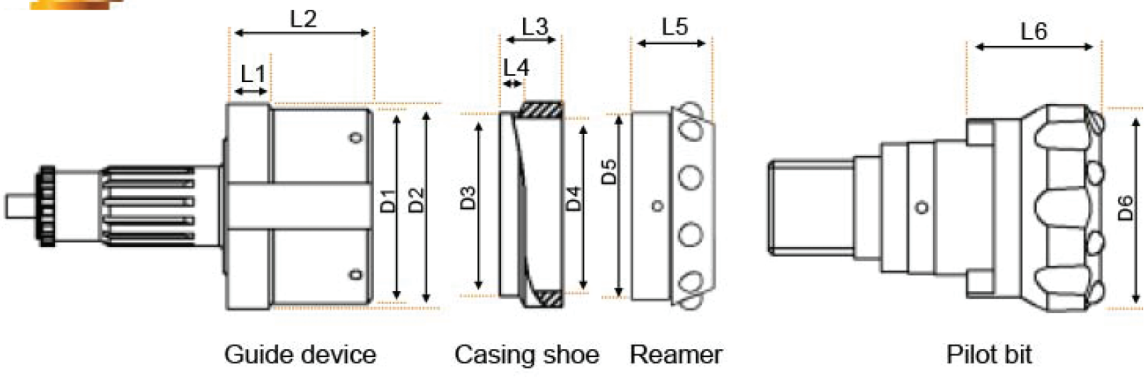

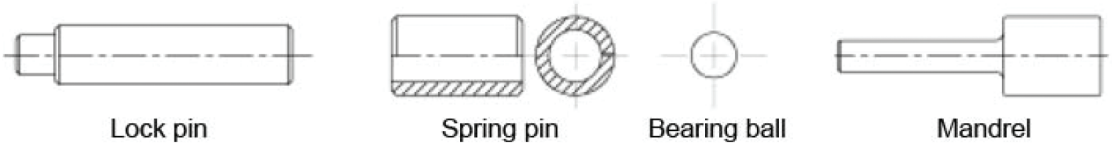


Overburden drilling system


OD165



Component parts


Ref	Item	Description
1	Casing tube	Maximum O.D: 195mm Minimum O.D: 182.6mm
2	Drill pipe	Connection thread: API 3 1/2″ O.D: 114mm Wrench flat: 95mm
3	Guide sleeve	Effective length: 225mm
4	DTH Hammer	HD65, COP64, SD6 DHD360, MISSION60, QL60
5	Casing shoe	L3=95mm, L4=65mm D3=180mm, D4=168mm
6	Guide device	L1=61.5mm, L2=181.5mm D1=166mm, D2=179.6mm
7	Reamer	D5=165mm, L5=80mm Reamer Diameter: 211mm Reamer has 7×14 buttons
8	Pilot bit	D6=138mm, L6=66mm Gauge button: 8×ϕ16 Face button: 8×ϕ16

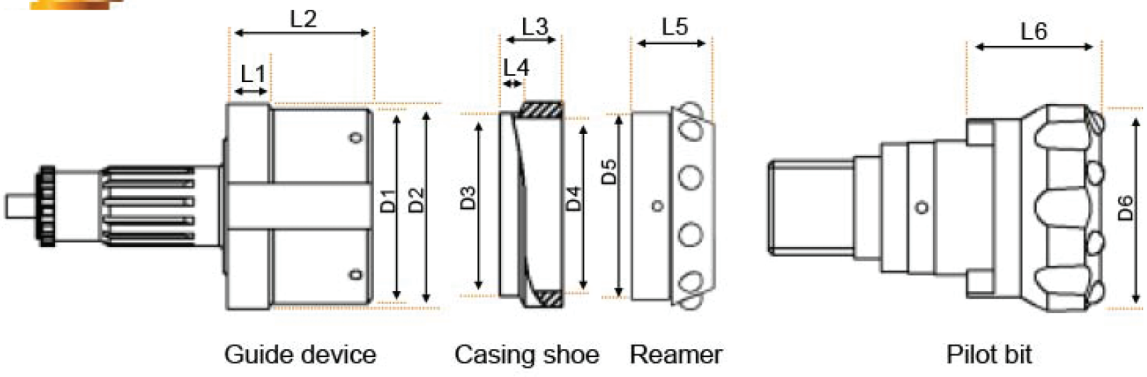

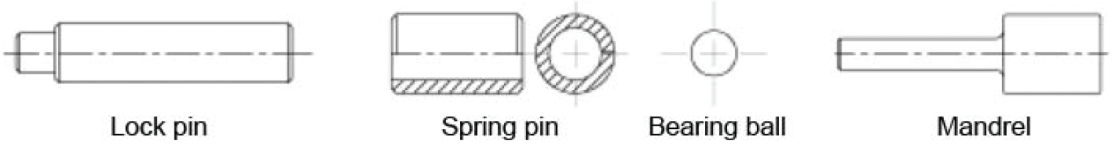


Overburden drilling system


OD190



Component parts


Ref	Item	Description
1	Casing tube	Maximum O.D: 222mm Minimum O.D: 205mm
2	Drill pipe	Connection thread: API 3 1/2″ O.D: 114mm Wrench flat: 95mm
3	Guide sleeve	Effective length: 250mm
4	DTH Hammer	HD65, COP64, SD6 DHD360, MISSION60, QL60
5	Casing shoe	L3=110mm, L4=72mm D3=204.7mm, D4=193mm
6	Guide device	L1=62.8mm, L2=185mm D1=191mm, D2=203mm
7	Reamer	D5=190mm, L5=90mm Reamer Diameter: 237mm Reamer has 7×16 buttons
8	Pilot bit	D6=138mm, L6=66mm Gauge button: 9×ϕ18 Face button: 9×ϕ16

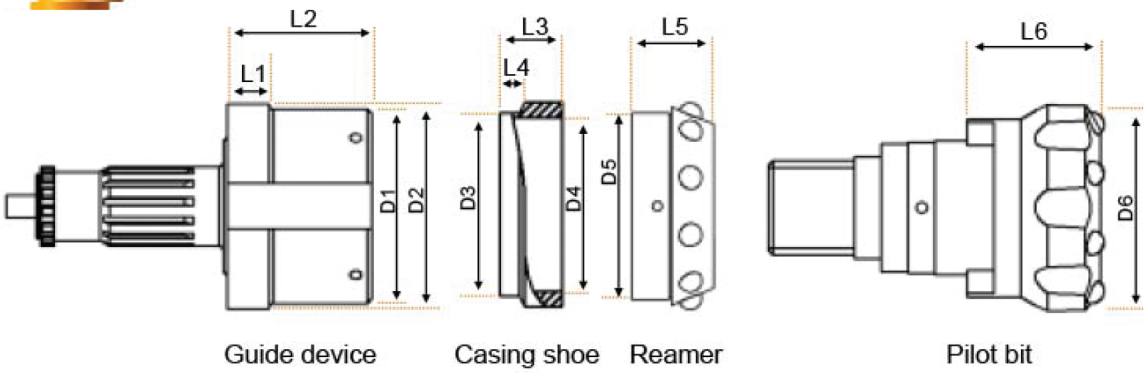

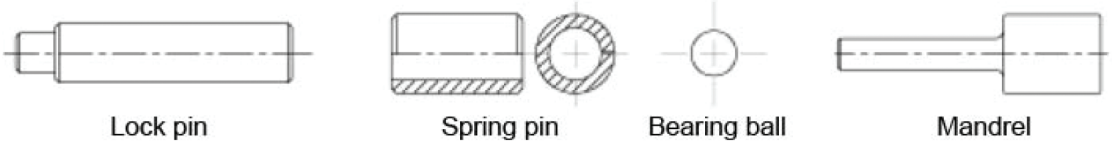


Overburden drilling system


OD240

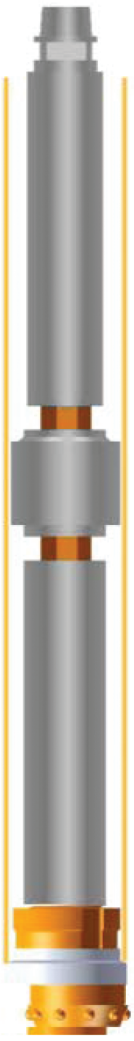


Component parts

Ref	Item	Description
1	Casing tube	Maximum O.D: 273mm Minimum O.D: 260.4mm
2	Drill pipe	Connection thread: API 3 1/2" O.D: 114mm Wrench flat: 95mm
3	Guide sleeve	Effective length: 317mm
4	DTH Hammer	HD85, COP84, SD8 DHD380, MISSION80, QL80
5	Casing shoe	L3=111mm, L4=75mm D3=208.3mm, D4=242mm
6	Guide device	L1=70mm, L2=190mm D1=240mm, D2=257mm
7	Reamer	D5=240mm, L5=100mm Reamer Diameter: 308mm Reamer has 16×16 buttons
8	Pilot bit	D6=240mm, L6=89.4mm Gauge button: 12×ϕ18 Face button: 32×ϕ16

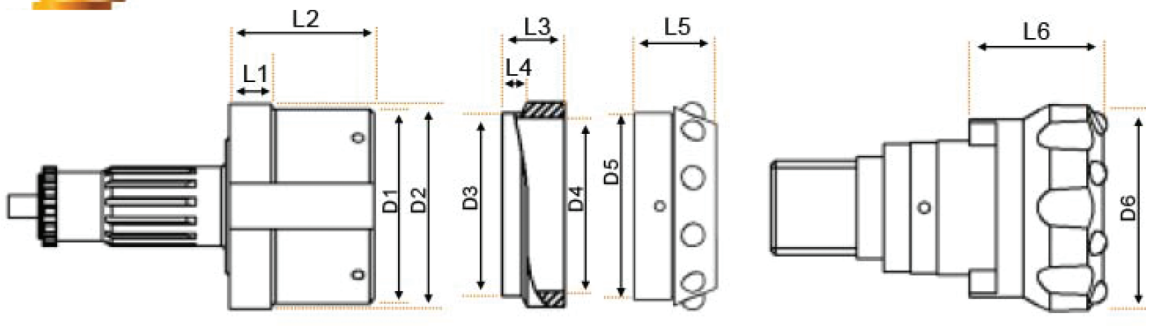

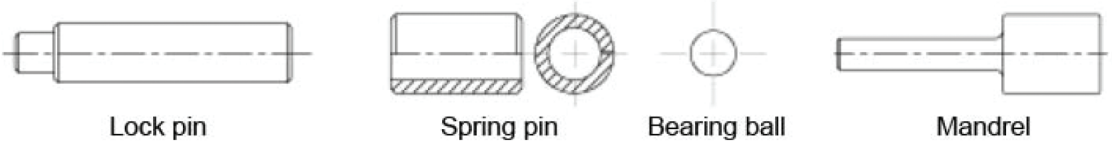

Symmetrix concentric drilling system

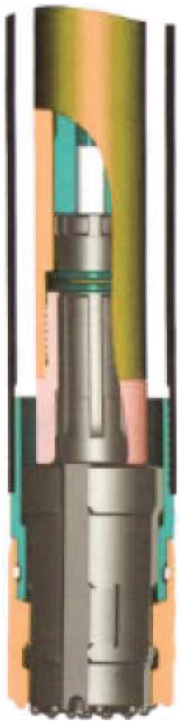

Product type	Case OD	Casing wall max	Ring bit ID	Ring bit OD	Pilot bit OD	Hammer
JSOD114	114.3	6/10	91/78	128/124	100/92.5	DHH35
JSOD127	126.7	7	99	140	110.00	DHH35
JSOD140	139.7	7/10	116/94	154/150	124/117.5	DHH45, DHQ40
JSOD168	168.3	8/12.7	142/121	182/178	150/140	DHH55, DHQ50
JSOD178	178.3	10	145	195	156	DHH55, DHQ50
JSOD194	193.7	6/12.7	167/148	212/203	180/167	DHH65, DHQ60
JSOD219	219.1	7/12.7	186/167	234	203/191	DHH65, DHQ60
JSOD273	273.0	8/12.7	232/219	292	255/246	DHH85, DHQ80
JSOD325	323.9	8/12.7	281/270	342/342	306/297	DHH85, DSD8
JSOD406	406.4	12.7	328	419	374.00	DSD10, DHN125
JSOD508	508.0	15	412	526	470.00	DHH475, DSD15
JSOD609	609.6	15	513	637	570.00	DHH525, DSD18



Ping bit Casing Retainer ring Casing Pilot bit

PIC8 ROCK TOOLS

Drill pipes



Drill pipes

Traditioanl rig application: Various rig applicatic

Diameter		Thread	Wall thickness		Length		Wrench flats			Weight		Part No.
inch	mm	Pin/Box	inch	mm	feet	m	inch	mm	flat location	lbs	kg	
2 3/8	60	RD 50-6	1/6	4.0	9.8	3.00	2 1/6	55	Both ends	51	23	DP70RD50-30
3	76	RD 50-6	1/6	4.0	4.9	1.50	2 5/9	65	Both ends	35	16	DP76RD50-15
3	76	RD 50-6	1/6	4.0	6.6	2.00	2 5/9	65	Both ends	42	19	DP76RD50-20
3	76	RD 50-6	1/6	4.0	9.8	3.00	2 5/9	65	Both ends	57	26	DP76RD50-30
3	76	RD 50-6	1/6	4.0	3.3	1.00	2 5/9	65	Both ends	24	11	DP76API238-10
3	76	2 3/8 API REG	1/6	4.0	4.9	1.50	2 5/9	65	Both ends	33	15	DP76API238-15
3	76	2 3/8 API REG	1/6	4.0	6.6	2.00	2 5/9	65	Both ends	40	18	DP76API238-20
3	76	2 3/8 API REG	1/6	4.0	9.8	3.00	2 5/9	65	Both ends	55	25	DP76API238-30
3	76	2 3/8 API REG	1/4	6.3	3.3	1.00	2 5/9	65	Both ends	31	14	DP76API238-10
3	76	2 3/8 API REG	1/4	6.3	4.9	1.50	2 5/9	65	Both ends	44	20	DP76API238-15
3	76	2 3/8 API REG	1/4	6.3	6.6	2.00	2 5/9	65	Both ends	55	25	DP76API238-20
3	76	2 3/8 API REG	1/4	6.3	9.8	3.00	2 5/9	65	Both ends	79	36	DP76API238-30
3 1/2	89	2 3/8 API REG	1/6	4.0	3.3	1.00	2 5/9	65	Both ends	31	14	DP89API238-10
3 1/2	89	2 3/8 API REG	1/6	4.0	4.9	1.50	2 5/9	65	Both ends	40	18	DP89API238-15
3 1/2	89	2 3/8 API REG	1/6	4.0	6.6	2.00	2 5/9	65	Both ends	51	23	DP89API238-20
3 1/2	89	2 3/8 API REG	1/6	4.0	9.8	3.00	2 5/9	65	Both ends	68	31	DP89API238-30
3 1/2	89	2 3/8 API REG	1/4	6.3	3.3	1.00	2 5/9	65	Both ends	37	17	DP89API238-10
3 1/2	89	2 3/8 API REG	1/4	6.3	4.9	1.50	2 5/9	65	Both ends	53	24	DP89API238-15
3 1/2	89	2 3/8 API REG	1/4	6.3	6.6	2.00	2 5/9	65	Both ends	66	30	DP89API238-20
3 1/2	89	2 3/8 API REG	1/4	6.3	9.8	3.00	2 5/9	65	Both ends	95	43	DP89API238-30
3 1/2	89	2 7/8 API REG	1/4	6.3	9.8	3.00	2 5/9	65	Both ends	95	43	DP89API278-30
4	102	2 7/8 API REG	1/4	6.3	9.8	3.00	3	75	Both ends	115	52	DP102API278-30
4 1/2	114	3 1/2 API REG	1/6	4.0	9.8	3.00	3 3/4	95	Both ends	101	46	DP114API312-30
4 1/2	114	3 1/2 API REG	1/4	6.3	3.3	1.00	3 3/4	95	Both ends	59	27	DP114API312-10
4 1/2	114	3 1/2 API REG	1/4	6.3	4.9	1.50	3 3/4	95	Both ends	77	35	DP114API312-15
4 1/2	114	3 1/2 API REG	1/4	6.3	6.6	2.00	3 3/4	95	Both ends	97	44	DP114API312-20
4 1/2	114	3 1/2 API REG	1/4	6.3	9.8	3.00	3 3/4	95	Both ends	132	60	DP114API312-30B
4 1/2	114	3 1/2 API REG	1/4	6.3	14.8	4.50	3 3/4	95	Both ends	189	86	DP114API312-45
4 1/2	114	3 1/2 API REG	1/4	6.3	19.7	6.00	3 3/4	95	Both ends	244	111	DP114API312-60
4 1/2	114	3 1/2 API REG	1/3	8.8	3.3	1.00	3 3/4	95	Both ends	65	29	DP114API312-10H
4 1/2	114	3 1/2 API REG	1/3	8.8	6.6	2.00	3 3/4	95	Both ends	119	54	DP114API312-20H
4 1/2	114	3 1/2 API REG	1/3	8.8	9.8	3.00	3 3/4	95	Both ends	170	77	DP114API312-30H
4 1/2	114	3 1/2 API REG	1/3	8.8	19.7	6.00	3 3/4	95	Both ends	295	134	DP114API312-60H
3 1/2	89	2 3/8 IF	1/4	6.3	6.6	2.00	2 5/9	65	Both ends	68	31	DP89IF238-20
3 1/2	89	2 3/8 IF	1/6	4.0	9.8	3.00	2 5/9	65	Both ends	68	31	DP89IF238-30
4 1/2	114	2 7/8 IF	1/4	6.3	19.7	6.00	3 3/4	95	Both ends	247	112	DP114IF278-60

Traditioanl rig application: PV-271 / PV-351

Diameter		Thread	Component	Wall thickness		Length		Wrench flats			Hex		Weight		Part No.
inch	mm	Pin/Box		inch	mm	feet	m	inch	mm	flat location	inch	mm	lbs	kg	
4.50	114	3 1/2 API REG	PIPE	0.337	9	25.00	7.62	3.50	89	Pin only	4.00	102	411.9	187	DP114API312-76
4.50	114	3 1/2 API REG	STARTER PIPE	0.625	16	21.60	6.55	3.50	89	Both ends	No	No	596.9	271	DP114API312-65
5.50	140	4 FH	PIPE	0.415	11	25.00	7.62	4.50	114	Both ends	5.00	127	733.5	333	DP140FH4-76
7.62	194	4 1/2 BECO	PIPE	0.500	13	20.00	6.10	6.00	152	Both ends	6.50	165	922.9	419	DP194BEC412-61
7.62	194	4 1/2 BECO	PIPE	0.500	13	30.00	9.14	6.00	152	Both ends	6.50	165	1297.4	588	DP194BEC412-91
7.62	194	4 1/2 BECO	PIPE	0.500	13	25.00	7.62	6.00	152	Both ends	6.50	165	1110.1	504	DP194BEC412-76
7.62	194	5 1/4 BECO	PIPE	0.750	19	8.00	2.44	6.75	171	Both ends	No	No	625.6	284	DP194BEC514-24
7.62	194	5 1/4 BECO	STARTER PIPE	0.750	19	25.00	7.62	6.75	171	Both ends	No	No	1524.2	691	DP194BEC514-76
7.62	194	5 1/4 BECO	PIPE	2.000	51	35.00	10.67	6.62	168	Both ends	No	No	3830.4	1737	DP194BEC514-106
8.62	219	6 BECO	PIPE	2.000	51	35.00	10.67	7.75	197	Both ends	No	No	4995.6	2266	DP219BEC6-106
10.75	273	8 BECO	PIPE	1.000	25	35.00	10.67	9.25	235	Both ends	No	No	4511.0	2046	DP273BEC8-106
12.75	324	8 BECO	PIPE	1.000	25	35.00	10.67	10.50	267	Both ends	No	No	5026.4	2280	DP324BEC8-106
13.38	340	10 BECO	PIPE	1.000	25	35.00	10.67	11.38	289	Both ends	No	No	5264.3	2388	DP340BEC10-106

Drill pipes

Traditioanl rig application: ECM695/760/780

Diameter		Thread	Component	Wall thickness		Length		Wrench flats			Hex		Weight		Part No.
inch	mm	Pin/Box		inch	mm	feet	m	inch	mm	flat location	inch	mm	lbs	kg	
3.00	76	2 Z	PIPE	0.250	6	13.00	4.00	2.25	57	Both ends	No	No	104	47	DP76Z2-40
3.00	76	2 Z	PIPE	0.500	13	13.00	4.00	2.74	70	Both ends	No	No	176	80	DP76Z2-40H
3.00	76	2 Z	STARTER PIPE	0.250	6	8.80	2.60	2.25	57	Both ends	No	No	73	33	DP76Z2-26
3.00	76	2 Z	STARTER PIPE	0.500	13	8.0	2.44	2.25	57	Both ends	No	No	132	60	DP76Z2-24
3.00	76	2 3/8 API Box	STARTER PIPE	0.500	13	8.0	2.44	2.25	57	Both ends	No	No	132	60	DP76API238-24B
3.00	76	2 3/8 API	PIPE	0.254	6	10.0	3.05	2.25	57	Both ends	No	No	79	36	DP76API238-30
3.50	89	2 1/2 Z	PIPE	0.254	6	13.0	4.00	2.74	70	Both ends	No	No	126	57	DP89Z212-40
3.50	89	2 1/2 Z	STARTER PIPE	0.368	9	8.9	2.70	1.75	44	Pin only	No	No	106	48	DP89Z212-27
3.50	89	2 3/8 API Box	STARTER PIPE	0.368	9	9.0	2.74	2.74	70	Both ends	No	No	110	50	DP89API238-28
3.50	89	2 1/2 Z	STARTER PIPE	0.368	9	9.0	2.74	2.74	70	Both ends	No	No	110	50	DP89Z212-28
4.00	102	3 1/2 API Box	PIPE	0.250	6	13.0	4.00	3.00	76	Both ends	No	No	148	67	DP102API312-40
4.00	102	2 1/2 Z	PIPE	0.250	6	13.0	4.00	3.00	76	Both ends	No	No	148	67	DP102Z212-40
4.00	102	2 1/2 Z	STARTER PIPE	0.250	6	8.0	2.44	3.00	76	Both ends	No	No	95	43	DP102Z212-24
4.00	102	2 1/2 Z	PIPE	0.500	13	13.0	4.00	3.00	76	Both ends	No	No	249	113	DP102Z212-40H
4.00	102	3 1/2 API Box	STARTER PIPE	0.500	13	9.0	2.74	3.00	76	Both ends	No	No	88	40	DP102API312-28
4.00	102	2 1/2 Z	STARTER PIPE	0.500	13	9.0	2.74	3.00	76	Both ends	No	No	88	40	DP102Z212-28
5.00	127	3 1/2 API REG	STARTER PIPE	0.750	19	26.6	8.10	3.50	89	Both ends	No	No	980	445	DP127API312-81
5.00	127	3 1/2 API REG	STARTER PIPE	0.375	10	21.6	6.55	3.50	89	Both ends	No	No	485	220	DP127API312-65
5.00	127	3 1/2 API REG	STARTER PIPE	0.750	19	29.6	8.99	3.50	89	Both ends	No	No	1086	493	DP127API312-89
5.00	127	3 1/2 API REG	STARTER PIPE	0.750	19	31.6	9.60	3.50	89	Both ends	No	No	1159	526	DP127API312-96
5.00	127	3 1/2 BECO	PIPE	0.750	19	30.0	9.14	3.50	89	Pin only	4.62	117	1097	498	DP127BEC312-91H
5.00	127	3 1/2 BECO	PIPE	0.500	13	30.0	9.14	3.50	89	Pin only	4.62	117	773	351	DP127BEC312-91
5.00	127	3 1/2 BECO	PIPE	0.500	13	35.0	10.67	3.50	89	Pin only	4.62	117	892	405	DP127BEC312-106
5.00	127	3 1/2 BECO	PIPE	0.500	13	25.0	7.62	3.50	89	Pin only	4.62	117	654	297	DP127BEC312-76
5.00	127	3 1/2 BECO	STARTER PIPE	0.500	13	26.6	8.10	3.50	89	Pin only	No	No	573	260	DP127BEC312-81
5.00	127	3 1/2 BECO	STARTER PIPE	0.500	13	21.6	6.55	3.50	89	Pin only	No	No	551	250	DP127BEC312-65
5.50	140	3 1/2 BECO	PIPE	0.415	11	25.0	7.62	4.50	114	Both ends	5.00	127	733	332	DP140BEC312-76
5.50	140	3 1/2 BECO	PIPE	0.415	11	30.0	9.14	4.50	114	Both ends	5.00	127	866	393	DP140BEC312-91
5.50	140	3 1/2 BECO	PIPE	0.750	19	30.0	9.14	4.50	114	Both ends	5.00	127	1240	562	DP140BEC312-91H
5.50	140	3 1/2 BECO	PIPE	0.750	19	25.0	7.62	4.50	114	Both ends	5.00	127	1044	474	DP140BEC312-76
5.50	140	3 1/2 BECO	PIPE	0.750	19	35.0	10.67	4.50	114	Both ends	5.00	127	1434	650	DP140BEC312-106
5.50	140	3 1/2 BECO	STARTER PIPE	0.415	11	25.8	7.82	4.50	114	Both ends	No	No	685	311	DP140BEC312-78
5.50	140	3 1/2 BECO	STARTER PIPE	0.415	11	20.8	6.30	4.50	114	Both ends	No	No	621	282	DP140BEC312-63
6.25	159	4 BECO	PIPE	0.500	13	25.0	7.62	4.50	114	Both ends	5.00	127	868	394	DP159BEC4-76
6.25	159	4 BECO	PIPE	0.500	13	30.0	9.14	4.50	114	Both ends	5.00	127	1013	459	DP159BEC4-91
6.25	159	4 BECO	PIPE	0.750	19	30.0	9.14	4.50	114	Both ends	5.00	127	1447	656	DP159BEC4-91H
6.25	159	4 BECO	PIPE	0.500	13	35.0	10.67	4.50	114	Both ends	5.00	127	993	450	DP159BEC4-106
6.25	159	4 BECO	PIPE	0.750	19	35.0	10.67	4.50	114	Both ends	5.00	127	1678	761	DP159BEC4-106H
6.25	159	4 BECO	STARTER PIPE	0.500	13	25.8	7.82	4.50	114	Both ends	No	No	899	408	DP159BEC4-78
6.25	159	4 BECO	STARTER PIPE	0.500	13	20.8	6.30	4.50	114	Both ends	No	No	747	339	DP159BEC4-63
7.00	178	4 1/2 BECO	PIPE	0.750	19	25.0	7.62	5.00	127	Pin only	6.00	152	1410	640	DP178BEC412-76
7.00	178	4 1/2 BECO	PIPE	0.750	19	30.0	9.14	5.00	127	Pin only	6.00	152	1672	758	DP178BEC412-91H
7.00	178	4 1/2 BECO	PIPE	0.750	19	35.0	10.67	5.00	127	Pin only	6.00	152	1945	882	DP178BEC412-106
7.00	178	4 1/2 BECO	PIPE	0.500	13	30.0	9.14	5.00	127	Pin only	6.00	152	1174	533	DP178BEC412-91
7.00	178	4 1/2 BECO	PIPE	0.500	13	25.0	7.62	5.00	127	Both ends	6.00	152	1042	473	DP178BEC412-76
7.00	178	4 1/2 BECO	PIPE	0.500	13	30.0	9.14	5.00	127	Both ends	6.00	152	1200	544	DP178BEC412-91B
7.00	178	4 1/2 BECO	PIPE	0.500	13	35.0	10.67	5.00	127	Both ends	6.00	152	1372	622	DP178BEC412-106
7.00	178	4 1/2 BECO	PIPE	0.750	19	30.0	9.14	6.00	152	Both ends	6.50	165	1703	772	DP178BEC412-91H
7.00	178	4 1/2 BECO	PIPE	1.000	25	25.0	7.62	6.00	152	Both ends	6.50	165	1443	655	DP178BEC412-76H
7.00	178	4 1/2 BECO	STARTER PIPE	0.500	13	25.7	7.82	5.00	127	Pin end	No	No	1205	547	DP178BEC412-78
7.62	194	5 1/4 BECO	PIPE	0.750	19	25.0	7.62	6.00	152	Both ends	6.50	165	1571	713	DP194BEC514-76
7.62	194	5 1/4 BECO	PIPE	0.875	22	25.0	7.62	5.00	127	Pin only	6.50	165	1709	775	DP194BEC514-76H
7.62	194	5 1/4 BECO	PIPE	0.750	19	30.0	9.14	6.00	152	Both ends	6.50	165	1857	842	DP194BEC514-91
7.62	194	5 1/4 BECO	PIPE	0.750	19	30.0	9.14	6.75	171	Both ends	No	No	1877	851	DP194BEC514-91B
7.62	194	5 1/4 BECO	PIPE	1.000	25	30.0	9.14	6.00	152	Both ends	6.50	165	2220	1007	DP194BEC514-91H

Drill pipes

Traditioanl rig application: T2, T3, TH60/75E/100A


Diameter		Thread Pin/Box	Component	Wall thickness		Length		Wrench flats			Hex		Weight		Part No.
inch	mm			inch	mm	feet	m	inch	mm	flat location	inch	mm	lbs	kg	
3.50	89	2 3/8 IF	PIPE	0.368	9	20.00	6.10	2.75	70	Box only	No	No	229	104	DP89IF238-61
4.50	114	2 3/8 IF	PIPE	0.337	9	20.00	6.10	3.50	89	Box only	No	No	344	156	DP114IF278-61
4.50	114	3 1/2 API REG	PIPE	0.337	9	20.00	6.10	3.50	89	Box only	No	No	344	156	DP114API312-61

Traditioanl rig application: DM30/45/50/L, T4W, T4BH, RD20

Diameter		Thread Pin/Box	Component	Wall thickness		Length		Wrench flats			Hex		Weight		Part No.
inch	mm			inch	mm	feet	m	inch	mm	flat location	inch	mm	lbs	kg	
3.50	89	2 3/8 API REG	PIPE	0.500	13	30.00	9.14	3.50	89	Both ends	No	No	491	223	DP89API238-91
3.50	89	2 3/8 API REG	PIPE	0.337	9	25.00	7.62	2.50	64	Both ends	No	No	315	143	DP89API238-76
3.50	89	2 3/8 API REG	STARTER PIPE	0.750	19	21.00	6.40	2.50	64	Both ends	No	No	485	220	DP89API238-64
3.50	89	2 3/8 API REG	STARTER PIPE	0.500	13	26.60	8.10	3.50	89	Both ends	No	No	441	200	DP89API238-81
4.00	102	2 7/8 API REG	PIPE	0.337	9	30.00	9.14	3.50	89	Pin only	3.50	89	489	222	DP102API278-91
4.00	102	2 7/8 API REG	PIPE	0.750	19	30.00	9.14	3.50	89	Pin only	3.50	89	751	341	DP102API278-91H
4.00	102	2 7/8 API REG	PIPE	0.337	9	25.00	7.62	3.50	89	Pin only	3.50	89	421	191	DP102API278-76
4.00	102	2 7/8 API REG	PIPE	0.337	9	25.00	7.62	3.00	76	Both ends	No	No	410	186	DP102API278-76B
4.00	102	2 7/8 API REG	PIPE	0.337	9	25.00	7.62	3.50	89	Both ends	No	No	410	186	DP102API278-76C
4.00	102	2 7/8 API REG	STARTER PIPE	0.750	19	26.60	8.10	3.50	89	Pin only	No	No	520	236	DP102API278-81
4.00	102	2 7/8 API REG	STARTER PIPE	0.337	9	21.00	6.40	3.00	76	Both ends	No	No	313	142	DP102API278-64
4.00	102	2 7/8 API REG	STARTER PIPE	0.337	9	21.00	6.40	3.50	89	Both ends	No	No	313	142	DP102API278-64B
4.00	102	2 7/8 API REG	STARTER PIPE	0.750	19	21.00	6.40	3.50	89	Both ends	No	No	388	176	DP102API278-64H
4.50	114	2 7/8 IF	PIPE	0.337	9	25.00	7.62	3.50	89	Pin only	4.00	102	411	186	DP114IF278-76
4.50	114	2 7/8 IF	STARTER PIPE	0.625	16	21.00	6.40	3.50	89	Both ends	No	No	584	265	DP114IF278-64
4.50	114	2 7/8 IF	PIPE	0.337	9	30.00	9.14	3.50	89	Pin only	4.00	102	489	222	DP114IF278-91
4.50	114	2 7/8 IF	PIPE	0.337	9	20.00	6.10	3.50	89	Box only	No	No	344	156	DP114IF278-61
4.50	114	3 1/2 API REG	PIPE	0.625	16	25.00	7.62	3.50	89	Pin only	4.00	102	833	378	DP114API312-76
4.50	114	3 1/2 API REG	PIPE	0.337	9	30.00	9.14	3.50	89	Pin only	4.00	102	489	222	DP114API312-91
4.50	114	3 1/2 API REG	PIPE	0.750	19	30.00	9.14	3.50	89	Pin only	4.00	102	989	449	DP114API312-91H
4.50	114	3 1/2 API REG	PIPE	0.500	13	30.00	9.14	3.50	89	Pin only	4.00	102	667	303	DP114API312-91B
4.50	114	3 1/2 API REG	PIPE	0.430	11	35.00	10.67	3.50	89	Pin only	4.00	102	760	345	DP114API312-106
4.50	114	3 1/2 API REG	STARTER PIPE	0.750	19	26.60	8.10	3.50	89	Pin only	No	No	855	388	DP114API312-81
4.50	114	3 1/2 IF	PIPE	0.337	9	20.00	6.10	3.50	89	Box only	No	No	344	156	DP114IF312-61
5.00	127	3 1/2 API REG	PIPE	0.375	10	25.00	7.62	3.50	89	Pin only	4.00	102	562	255	DP127API312-76
5.00	127	3 1/2 API REG	PIPE	0.500	13	25.00	7.62	3.50	89	Pin only	4.00	102	630	286	DP127API312-76B
5.00	127	3 1/2 API REG	PIPE	0.750	19	25.00	7.62	3.50	89	Pin only	4.00	102	907	411	DP127API312-76H
5.00	127	3 1/2 API REG	PIPE	0.500	13	30.00	9.14	3.50	89	Pin only	4.00	102	756	343	DP127API312-91B
5.00	127	3 1/2 API REG	PIPE	0.337	9	30.00	9.14	3.50	89	Pin only	4.00	102	837	380	DP127API312-91
5.00	127	3 1/2 API REG	PIPE	0.750	19	30.00	9.14	3.50	89	Pin only	4.00	102	1081	490	DP127API312-91H
5.00	127	3 1/2 API REG	PIPE	0.500	13	35.00	10.67	3.50	89	Pin only	4.00	102	874	396	DP127API312-106
5.00	127	3 1/2 API REG	PIPE	0.750	19	35.00	10.67	3.50	89	Pin only	4.00	102	1264	573	DP127API312-106H

Box to Pin

Female to Male



Diameter		Length		Configuratioin		Flats		Weight		Part No.
inch	mm	inch	mm	Box	Pin	inch	mm	lbs	kg	
3.00	76	11.81	300	2 3/8 API REG	2 Z	2.62	67	15	7	BP76API238/Z2
3.50	89	5.72	145	2 3/8 API REG	RD 50-6	2.56	65	9	4	BP76API238/RD50
3.00	76	5.50	140	2 3/8 API REG	2 3/8 API REG	2.56	65	9	4	BP76API238/API238
3.50	89	14.00	356	2 3/8 API REG	3 1/2 IF	2.50	64	46	21	BP89API238/IF312
3.50	89	5.50	140	2 3/8 API REG	2 3/8 API REG	2.56	65	13	6	BP89API238/API238
3.75	95	5.13	130	2 3/8 API REG	2 7/8 API REG	2.56	65	18	8	BP95API238/API278
4.00	102	5.50	140	2 3/8 API REG	2 7/8 API REG	3.00	76	18	8	BP102API238/API278
4.00	102	5.13	130	2 3/8 API REG	2 3/8 API REG	3.00	76	17	8	BP102API238/API238
4.50	114	4.72	120	2 3/8 API REG	3 1/2 API REG	3.75	95	19	9	BP115API238/API312
3.50	89	6.00	152	2 7/8 API REG	2 3/8 API REG	2.56	65	14	6	BP90API278/API238
4.00	102	9.00	229	2 7/8 API REG	2 7/8 API REG	3.50	89	24	11	BP102API278/API278
4.00	102	14.00	356	2 7/8 API REG	3 1/2 IF	3.00	76	55	25	BP102API278/IF312
5.75	146	19.00	483	2 7/8 API REG	4 IF	3.50	89	73	33	BP146API278/IF4
6.00	152	19.00	483	2 7/8 API REG	4 IF	3.50	89	123	56	BP152API278/IF4
5.00	127	19.00	483	2 7/8 IF	4 FH	3.50	89	79	36	BP127IF278/FH4
5.50	140	9.50	241	2 7/8 IF	4 FH	3.50	89	53	24	BP140IF278/FH4
4.00	102	13.38	340	3 1/2 API REG	2 1/2 Z	3.00	76	24	11	BP102API312/Z212
4.00	102	12.00	305	3 1/2 API REG	2 7/8 API REG	3.00	76	32	15	BP102API312/API278
4.50	114	8.62	219	3 1/2 API REG	2 3/8 API REG	3.75	95	28	13	BP114API312/API238
4.50	114	6.29	160	3 1/2 API REG	2 7/8 API REG	3.75	95	16	7	BP114API312/API278
4.50	114	6.29	160	3 1/2 API REG	2 7/8 IF	3.75	95	18	8	BP114API312/IF278
4.50	114	6.29	160	3 1/2 API REG	3 1/2 API REG	3.75	95	18	8	BP114API312/API312
5.00	127	9.00	229	3 1/2 API REG	3 1/2 API REG	3.50	89	44	20	BP127API312/API312
5.00	127	9.00	229	3 1/2 API REG	3 1/2 BECO	3.50	89	44	20	BP127API312/BECI312
5.00	127	19.00	483	3 1/2 API REG	4 FH	3.50	89	57	26	BP127API312/FH4
5.50	140	32.00	813	3 1/2 API REG	3 1/2 BECO	4.50	114	189	86	BP140API312/BEC312
5.75	146	5.16	131	3 1/2 API REG	4 1/2 API REG	4.71	120	36	16	BP146API312/API412
6.00	152	19.00	483	3 1/2 API REG	4 IF	3.50	89	112	51	BP152API312/IF4
5.50	140	19.00	483	3 1/2 BECO	4 FH	4.50	114	73	33	BP140BEC312/FH4
6.00	152	19.00	483	3 1/2 BECO	4 IF	3.50	89	108	49	BP152BEC312/IF4
6.00	152	19.00	483	4 BECO	4 IF	4.50	114	121	55	BP152BEC4/IF4
5.50	140	24.00	610	4 FH	2 7/8 IF	3.50	89	81	37	BP140FH4/IF278
4.50	114	24.00	610	4 1/2 API REG	3 1/2 API REG	3.50	89	79	36	BP114API412/API312
5.50	140	9.00	229	4 1/2 API REG	3 1/2 API REG	4.50	114	46	21	BP140API412/API312
5.50	140	36.00	914	4 1/2 API REG	3 1/2 BECO	4.50	114	216	98	BP140API412/BEC312
5.75	146	9.25	235	4 1/2 API REG	3 1/2 API REG	3.75	95	42	19	BP146API412/API312
6.25	159	32.00	813	4 1/2 API REG	4 BECO	4.50	114	247	112	BP159API412/BEC4
7.00	178	25.00	635	4 1/2 API REG	4 1/2 BECO	4.50	114	238	108	BP178API412/BEC412
7.62	194	15.00	381	4 1/2 API REG	5 1/4 BECO	6.75	171	172	78	BP194API412/BEC514
7.62	194	15.00	381	5 1/2 API REG	4 1/2 BECO	6.75	171	165	75	BP194API512/BEC412
7.62	194	15.00	381	5 1/2 API REG	5 1/4 BECO	6.75	171	163	74	BP194API512/BEC514
8.62	219	25.00	635	5 1/2 API REG	6 BECO	7.75	197	366	166	BP219API512/BEC6
7.62	194	19.00	483	5 1/4 BECO	6 5/8 API REG	6.75	171	211	96	BP194BEC514/API658
7.00	178	15.00	381	6 5/8 API REG	4 1/2 BECO	5.75	146	128	58	BP178API658/BEC412
7.62	194	27.00	686	6 5/8 API REG	5 1/4 BECO	6.75	171	284	129	BPI94API658/BEC514
8.62	219	15.00	381	6 5/8 API REG	6 BECO	7.75	197	205	93	BP219API658/BEC6
9.25	235	47.50	1207	6 5/8 API REG	6 BECO	7.75	197	802	364	BP235API658/BEC6
10.75	273	15.00	381	6 5/8 API REG	8 BECO	9.25	235	374	170	BP273API658/BEC8
8.88	226	24.00	610	7 5/8 API REG	6 5/8 API REG	4.50	114	293	133	BP226API758/API658
					For Roc tubes (no flats)					
3.00	76	12.00	305	2 3/8 API REG	2 3/8 API REG	n/a	n/a	20	9	BP77API238/API238
3.50	89	12.00	305	2 3/8 API REG	2 3/8 API REG	n/a	n/a	29	13	BP90API238/API238
4.00	102	12.00	305	2 7/8 API REG	2 3/8 API REG	n/a	n/a	35	16	BP102API278/API238
4.50	114	12.00	305	3 1/2 API REG	3 1/2 API REG	n/a	n/a	46	21	BP115API312/API312
4.50	114	12.00	305	3 1/2 API REG	2 7/8 API REG	n/a	n/a	46	21	BP115API312/API278



PIC8
ROCK TOOLS

BAGNOLO PIEMONTE (CN) – ITALIA
+39 0175 348139/348756